621.1
B93s5

THE STEAM

ENGINE.

THE UNIVERSITY
OF ILLINOIS
LIBRARY
621.1
B93s5

JU YES.

Mag
Mau
Viol
Purp
Can
Mar
Crim
Bro
Blac

Scarlet
Cerise
Orange
Blue
Pink
Green
Claret
Lavender
Ponceau
Sultan Red
Blues.

RI ATHERS,

Complet oiling the Hands.

ED.

JUDSON'S DYES.—DYEING AT HOME.—JUDSON'S simple DYES are most useful and effectual. Ribbons, silks, feathers, scarfs, lace, braid, veils, handkerchiefs, clouds, bernouses, Shetland shawls, or any small articles of dress can easily be dyed in a few minutes, without soiling the hands, Violet, Magenta, Crimson, Mauve, Purple, Pink, Ponceau, Claret, &c.

JUDSON'S DYES.—PHOTOGRAPHIC PAPER POSITIVES or PHOTO-PRINTS should be dipped in hot water and then submitted to a hot bath of JUDSON'S DYES. Beautiful effects are thus produced in Green, Pink, Brown, and many other beautiful colours.—Use Judson's Dyes for general tinting!

JUDSON'S DYES.—FERNS, GRASSES, FLOWERS, and SEA-WEEDS may be dyed most exquisite colours, Green, Crimson, Purple, Scarlet, &c., by simply dipping them in a solution of JUDSON'S DYES. Charming Bouquet may be composed.

JUDSON'S DYES.—INK—INK—INK.—A Sixpenny Bottle of JUDSON'S DYES, Violet, Red, or Magenta, will make half a pint of brilliant writing ink in one minute by simply adding hot water.

JUDSON'S DYES.—For colouring Architectural Plans, &c. Much trouble may be saved in grinding up colours to a uniform tint. They may be used either with a brush or pen. Rose, Pink, Purple, Canary, Crimson, Orange, Green, Blue, Magenta, and 12 other Shades.

JUDSON'S DYES.—For Staining Wood, diluted with water. They sink deeply into the fibre and will not rub off. They form the most economical stain on record. Light Brown for mahogany colour is excellent; No. 2 Black for walnut; Canary for satin; also, Black, Lavender, Magenta, and many other colours.

SIXPENCE PER BOTTLE.

Of Chemists and Oilmen in London, Chemists and Stationers in the Country.

Diplo[illegible]t, Vienna Exhibition, 1873.

Goodall's Baking Powder

The Best Penny Packet in the World.

For making delicious Bread, Puddings, Pastry, &c., with half the usual quantity of Butter, Lard, or Eggs.

Sold by Druggists, Grocers, and Oilmen, in 1d. Packets, 6d., 1s., 1s. 6d., and 2s. Tins.

Proprietors: GOODALL, BACKHOUSE & CO., Leeds.

THE CELEBRATED

YORKSHIRE RELISH,

THE CHEAPEST AND MOST DELICIOUS SAUCE IN THE WORLD.

672,192 BOTTLES SOLD IN ONE MONTH

(August, 1872).

Sold by Grocers, Druggists, and Oilmen, in Bottles, at 6d., 1s., and 2s. Each.

Manufacturers: GOODALL, BACKHOUSE & Co., Leeds.

Goodall's Quinine Wine

Is an invaluable and agreeable Stomachic to all suffering from General Debility, Indigestion, Nervousness, and Loss of Appetite, and acknowledged to be

The Best and Cheapest Tonic yet introduced to the Public.

Recommended for its purity *by the "Food Journal," "Anti-Adulteration Review," "The Lancet," Arthur Hill Hassall, M.D., &c., &c.*

Sold by Grocers, Chemists, &c., in Large Bottles, at 1s., 13½d., 2s., and 2s. 3d. Each.

Prepared by GOODALL, BACKHOUSE & CO., Leeds.

2/6

Seance

C.819. 2/6

Ikam Locos 533

Digitized by the Internet Archive
in 2016

https://archive.org/details/steamengineitshi00burn

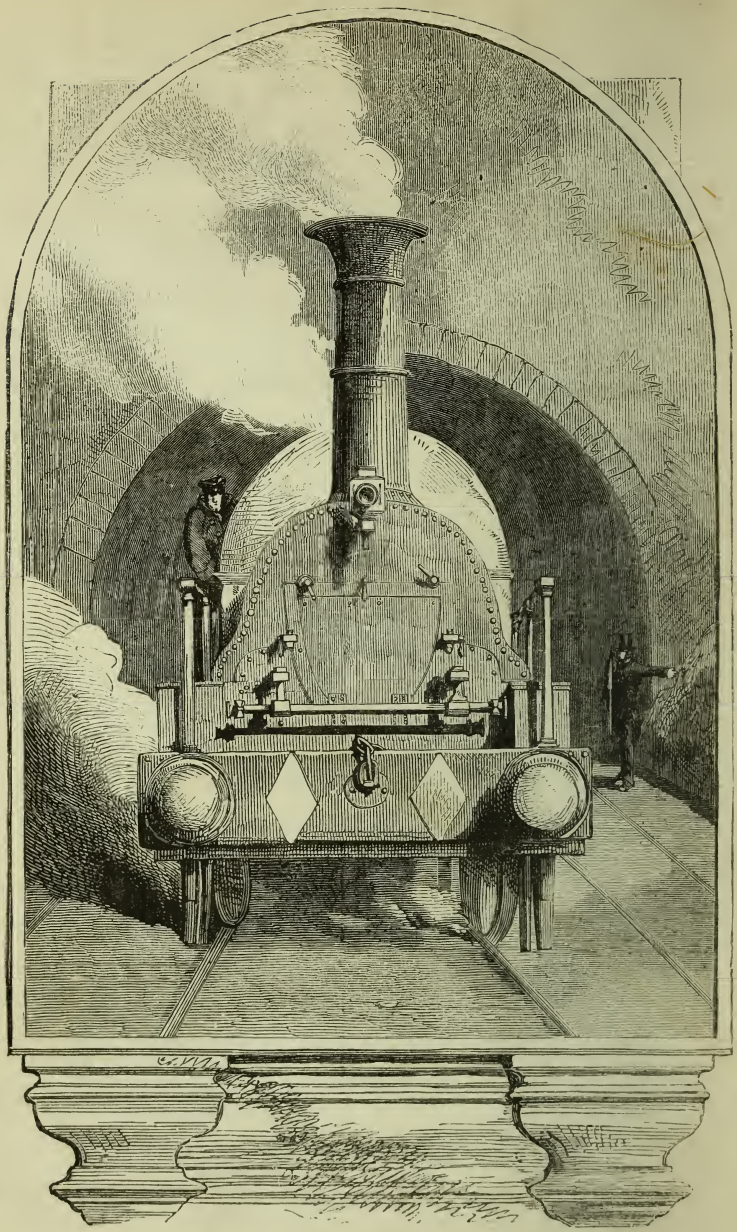

THE

STEAM ENGINE:

Its History and Mechanism.

BEING

DESCRIPTIONS AND ILLUSTRATIONS OF THE STATIONARY, LOCOMOTIVE, AND MARINE ENGINE,

FOR THE USE OF SCHOOLS AND STUDENTS.

BY

ROBERT SCOTT BURN,

AUTHOR OF

"THE ILLUSTRATED DRAWING BOOK," "MECHANICS AND MECHANISM," "ARCHITECTURAL ENGINEERING, AND MECHANICAL DRAWING BOOK," "ORNAMENTAL DRAWING AND ARCHITECTURAL DESIGNS," &c., &c.

FIFTH EDITION.

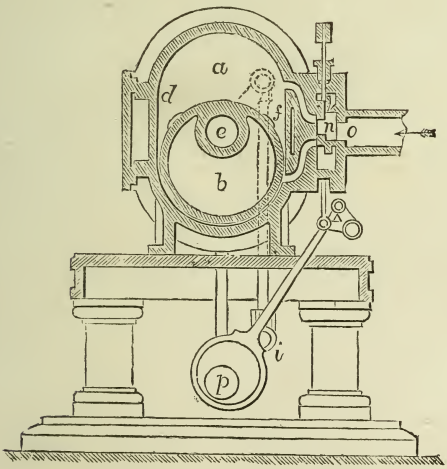

LONDON:

WARD, LOCK, AND TYLER,

WARWICK HOUSE, PATERNOSTER ROW.

LONDON :

PRINTED BY J. OGDEN AND CO.

172, ST. JOHN STREET, E.C.

621.1
B93s5

PREFACE TO THE SECOND EDITION.

In preparing a new edition of "The Steam-Engine; its History and Mechanism," it has been deemed advisable to render it uniform in size and price with the other works in Ward and Lock's Educational Series, of which it forms a part. This uniformity has been effected without changing the scope of the work as originally designed, and as explained in the Introduction to the First Edition. By careful condensation, and the avoidance of minute and unnecessary details, space has also been obtained for illustrations and descriptions of the most recent novelties in steam mechanism, thus bringing the work up to the latest date. The Author ventures, therefore, to hope that the work, in its improved form, will meet with as liberal a share of public patronage and approval as favoured the first issue, and that it may take a useful, though humble, place among Educational Works.

R. S. B.

336822

Railway engin. 27Ja'16 Baker 61 ed 5 SAPCLS

CONTENTS.

CHAPTER I.

HISTORICAL NOTICES OF THE APPLICATION OF STEAM, FROM HERO, 130 B.C., TO SMEATON, 1772 A.D.

Hero's Æloipile, 13. Steam, opinion of the ancients regarding the power of, 14. Blasco de Garay's steam-vessel, 15. Baptista Porta's engine for raising water, 15. Caus', Solomon de, engine for raising water, 16. Giovanni Branca's steam-wheel, 16. Worcester's, Marquis of, engine for raising water, 17. Savery's engine for raising water, 20. Papin's, Denis, steam-engine, 24. Newcomen and Cawley's engine for raising water, 26. Humphrey Potter's invention for working the valves of atmospheric engine, 30. Beighton's gear for working the valves of atmospheric engine, 30. Smeaton's improvements in the steam-engine, 32. Smeaton's Chacewater engine, 33.

CHAPTER II.

THE HISTORY OF THE INTRODUCTION OF THE MODERN STEAM-ENGINE.

James Watt, historical notice of, 34. Watt's experiments on steam, 35. Watt's first patent for steam-engines, 38. Watt's arrangement with Roebuck for working the patent, 38. Watt's arrangement with Bolton, of Soho, 38. Watt's arrangement of cylinder valves for pumping engines, 40. Watt's mechanism for working the valves, 41. Watt's improved cylinder, 42. Watt's expansive steam-engine, 43. Watt's "Indicator," for ascertaining the power of engine, 45. Watt's single-acting engine, 45. Watt, application of the crank to the engine of, 47. Watt's "sun-and-planet wheels," 48. Watt, attachment of the beam to the piston-rod in the first engine of, 48. Watt's parallel motion, 49. Watt's throttle-valve, 49. Watt's governor, 49. Watt's spindle or tappet valves for cylinder, 50. Double-acting engine of Watt, 51. Watt's wagon boilers with fittings, 51. Woolfe's steam-engine, 53. Leupold's high-pressure engine, 54. Trevethick and Vivian's high-pressure engine, 55. Pumping engine for mines, modern, 55. Double cylinder engine, M'Naught's, 56. Double cylinder engine for factories, on the marine principle, 58. High-pressure steam-engine, 61. Beam engine, high-pressure, 62. Crank-overhead high pressure steam-engine, 63. Table high-pressure engine, 64. Horizontal steam-engine, high pressure, 65. Oscillating engine, high-pressure, by Watt, 66. Oscillating engine, high-pressure, by Evans, 67. Portable agricultural engine, by Clayton and Shuttleworth, 68. Gough's portable agricultural steam-pump, 69.

CHAPTER III.

DETAILS OF BOILERS AND ENGINES.

Haycock boiler, Smeaton's, 70. Cornish boiler, 71. Double-furnaced boiler, 71. French boiler, 71. Galloway's patent boiler, 72. Multitubular boiler, 73. Marine tubular boiler, 74. Vertical tubular boiler, 75. Dunn's vertical boiler, 75. Cup-surface boiler, 76. Duplicate retort boiler, 76. Cowburn's patent cellular boiler, 77. Earl of

Dundonald's boiler, marine, 78. Feed apparatus to supply water to low-pressure boiler, 78. Self-acting damper, 78. Feed apparatus to supply water to high-pressure boiler, 79. Patent bucket boiler feed, 79. Fairbairn's lock-up valve, 80. Nasmyth's registered valve, 81. Hopkinson's double safety valve, 82. Hawthorn's safety valve, 82. Annular safety valve, 83. Fusible plates to prevent explosion of boilers, 83. Gauge-cocks to ascertain depth of water in boiler, 83. Gauge, mercurial-pressure, to ascertain pressure of steam in boiler, 83. Hopkinson's mercurial steam-pressure gauge, 83. Bourdon steam-gauge, 84. Mr. S. Smith's water-gauge, 84. Smoke-consuming furnace, 85. Prideaux's self-closing furnace valve, 85. High-pressure boiler, working drawings of, 87-89. Valve, three-port cylinder slide, 89. Valve, long-D slide, 90. Valve, short-D slide, 91. Valve, expansion, 92. Valve, expansion, for locomotives, 93. Valve, expansion, for stationary engines, 94. Stuffing-box, 94. Piston, metallic, 94. Regenerative condenser, 95. Gauge, vacuum, to ascertain degree of vacuum in condenser, 96. Governor equilibrium valve, 97. Governor, hydraulic, 98. Power, to calculate the, of steam-engines, 99. Diagrams, steam-engine, 101. Indicator to ascertain the power of engine, 101.

CHAPTER IV.

ROTATORY ENGINES AND OTHER VARIETIES.

Avery's rotatory engine, 103. Watt's rotatory engine, 103. Elliptic rotatory engine, 104. Reciprocating engine, Simpson and Shipton's patent, 105. Davies' disc-engine, 107.

CHAPTER V.

RAILWAY LOCOMOTION AND LOCOMOTIVE ENGINES.

Murdoch's locomotive, 110. Symington's locomotive, 111. Trevethick and Vivian's locomotive, 111. Stephenson's, George, improvements in locomotives, 114. Hackworth's, Timothy, improvements in locomotives, 114. Railway, opening of the Liverpool and Manchester, 114. "Rocket," George Stephenson's, 115. "Novelty," Braithewaite and Erricson's locomotive, 116. "Sanspareil," Timothy Hackworth's, 117. Fire-box of locomotive, 118. Blast-pipe, 119. Damper for furnace of locomotive, 119. Smoke-tubes of locomotive, 119. Steam-whistle, 120. Cylinder of locomotive, 121. Regulator for admitting steam to cylinder, 121. Piston-rod and crank, connection of, 122. Gear, reversing, of locomotive, 123. Modern locomotive, drawings of, 124. American wood-burning locomotive, elevations and sections, 125.

CHAPTER VI.

STEAM NAVIGATION AND THE MARINE ENGINE.

Blasco de Garay's steam-boat, 127. Denis Papin's model of marine engine, 127. Hull's, Jonathan, steam-boat, 127. Miller's introduction of steam-boat propulsion, 128. Symington's steam-boat, 129. Fulton's, Robert, steam-boat in America, 131. Bell's steam-boat on the Clyde, 131. Claims to the invention of steam-navigation, summary of, 133. Marine-engine, side-lever, 134. Marine-engine, details of, 135. Direct-acting marine-engine, 137. Double-cylinder marine-engine, or "Siamese," 137. "Steeple" marine-engine, 137. "Gorgon" marine-engine, 138. Oscillating engine, 138. Marine-engine, screw-propeller, 139. "Trunk" marine-engine, 142.

INTRODUCTORY CHAPTER.

THE PROPERTIES OF STEAM.



BEFORE we enter upon the consideration of the historical and mechanical details of the steam-engine, it will be necessary to explain as briefly as possible the nature and properties of steam.

When a quantity of water is heated until it arrives at a certain fixed temperature, an elastic fluid or aqueous vapour is evolved. This is called steam, and resembles common air in many of its properties. Like air, it is elastic, capable of being reduced in bulk by compression, the pressure which it exerts in the vessel into which it is forced being exactly in proportion to the amount of compression. Like air, steam is also capable of expanding in volume or bulk, the expansion reducing the pressure on the vessel in which it is confined just in proportion to the amount of expansion. The first property of steam now mentioned is termed its *elasticity*, the second its *expansibility*. Although having these properties in common with fluid gases, steam is distinguished by the term of aqueous vapour, inasmuch as it differs from an ordinary gas, which retains permanently its gaseous condition under ordinary circumstances; while steam requires to be kept at a uniform temperature, otherwise it changes its condition, and returns to its original form of liquid. This property, by which steam is readily converted into water, is of immense importance; by virtue of it, the power of steam is made available in what are termed condensing engines, as it offers the readiest means of forming a vacuum in the cylinder.

When a quantity of water is placed in a boiler, and heat applied to it, a circulation of the particles of water immediately commences. Those

nearest the bottom receive a certain quantity of heat, expand and rise upwards; the colder portions take their place, and become heated in their turn and rise as before; small air-bubbles form at the bottom after the above process has gone on for a certain time; these contain aqueous vapour, and rise upwards, and on coming in contact with the colder portions above, are cooled or condensed, and give out their heat to the surrounding particles. This process continues until the whole mass becomes of a uniform heat, and a fixed temperature has been arrived at. After this, however long the heat is applied to the boiler, the water will not increase in temperature, but the steam-bubbles would rise so rapidly, that the whole mass would be in a state of agitation, and a vapour would be evolved in large quantities. This vapour, as before stated, is steam, and is invisible, like common air. The fixed temperature already alluded to is what is termed the *boiling-point*. Under the ordinary atmospheric pressure at the level of the sea, the boiling-point of fresh water is 212° Fahrenheit; that of salt water is somewhat higher, or about 213·2°. In the generation of steam of a high pressure, the boiling-point varies, increasing in proportion to the pressure. With a pressure of 16 lbs. to the square inch, the temperature at which the water boils is 216·3°; at 18 lbs. to the inch, 222·7°; at 20 lbs., 228·4°; at 25 lbs., 240·9°; at 30 lbs., 251·4°; at 35 lbs., 260·6°; at 40 lbs. to the square inch, 268·8°; at 50 lbs., 282·7°; at 55 lbs., 288·8°. When steam is generated under a pressure of 15 lbs. to the square inch, it is termed "steam of one atmosphere;" when generated at 30 and 45 lbs. to the square inch, it is said to be of the pressure of steam of two and three atmospheres respectively.

One of the most striking peculiarities of steam is the enormous increase of its bulk as compared with that of the water from which it is generated. The proportion of increase will be best remembered by the statement that under the ordinary pressure of the atmosphere, or 15 lbs. to the square inch, a cubic inch of water will produce a cubic foot of steam; and as there are 1728 cubic inches in a foot, the increase of volume of steam is 1728 times. Under an increase of pressure the volume of steam is diminished; thus, with a pressure of 30 lbs. the volume is only one-half. Taking the "relative volume of steam" raised at a pressure of 15 lbs. at 1669, steam at 20 lbs. would have a volume of 1281; at 25 lbs., of 1047; of 30 lbs., or double the ordinary pressure, of 882; at 35 lbs., 766; at 40 lbs., 678; at 45 lbs., 609; and at a pressure of 50 lbs., steam would have the relative volume 554. We have before stated that steam is capable of being reduced to water by being lowered in tempera-

ture. This temperature is always the same as that of the water from which it is raised. By gradually reducing the temperature of steam, the vapour will be condensed, and be reconverted into water, a cubic foot of steam under the ordinary pressure occupying the space of about a cubic inch of water.

In raising steam, a large amount of caloric is absorbed which is not observable by the thermometer; this is termed "latent heat." By this is meant the amount of heat required to evaporate a given quantity of water compared with that necessary to bring the water to the boiling-point. Thus it is found that to raise a certain quantity of water into steam at 212°, it will take $5\frac{1}{2}$ times as much heat as would raise the water from 32°, or the freezing-point, to 212°, the ordinary boiling-point; this excess of caloric, however, is not indicated by the thermometer,—hence the term *latent heat.* The latent heat of steam is generally reckoned at 1000°, the temperature of the steam being 212°; the sum therefore of the sensible heat, that is, the temperature indicated by the thermometer, 212°, and the latent heat 1000°, is equal to 1212°. The total amount of the indicated and latent heat at all temperatures is a "constant sum:" thus if the pressure is increased at which the steam is raised, so as to give a temperature of 300°, the latent heat is 912°; if 500°, 712°, and so on. It is from this property of steam that so much fuel is expended in raising it. The mechanical effect produced by the evaporation of a cubic inch of water is generally calculated as sufficient "to raise a ton weight one foot high;" from this, however, is to be deducted loss from friction and other causes. In the body of the work will be found exemplifications of the properties of steam, and of the duty and the power of steam-engines; we therefore hasten to the consideration of the general subject.

In arranging the materials and illustrations of our work, we have been guided by the same principles which dictated the method of elucidation in our volume "Mechanics and Mechanism," in the present series. We have aimed at presenting practical details rather than elaborate theories. Not deeming these unnecessary, but conceiving that for the purposes of our treatise, and for the classes for which it is more particularly designed, correct illustrations and descriptions of the mechanical arrangements constituting the different varieties of steam-engines now in use will be more generally useful than expositions of strictly theoretical rules and mathematical formulæ, which serve in many cases to confuse rather than to enlighten the uninitiated reader, to deter rather than to induce the pupil to proceed in his investigations. The work necessarily assumes, to some

extent, the form of a compilation; but in addition to consulting the best authorities, and endeavouring to place the results of this in as attractive and regular a form as possible, we are indebted for some of our valuable illustrations to the editor of the "Practical Mechanic's Journal," by whose courtesy we have been enabled to enrich our pages. From the number of the illustrations, and the method of arrangement, we venture to hope that our work will form, in some measure, a useful auxiliary to WARD and LOCK'S Educational Series.

THE HISTORY

OF

THE STEAM-ENGINE.

CHAPTER I.

HISTORICAL NOTICES OF THE APPLICATION OF STEAM, FROM HERO, 130 B.C., TO SMEATON, 1772 A.D.

THE ancients are known to have had an acquaintance with the utility of the power of steam and heated air, and had devised certain contrivances in which this power was developed. These contrivances were applied to no purpose of utility, but served as the means to excite the wonder of the populace, as the miraculous production of their priesthood, and as forming part of the mysteries of their worship. Thus, one of the contrivances of the well-known Hero of Alexandria—the first personage who figures in the stereotyped history of the steam-engine—who flourished 130 years before Christ, was for the purpose of causing wine to flow from the hands of images placed beside the altar. In another contrivance, the force of the vapour of water was perhaps more obviously shown. In fig. 1, a



fig. 1.



fig. 2.

caldron or vase *a* has a pipe *c* fitted to it, terminated by a small cup *d*. On the caldron being partially filled with water, and fire applied beneath it, the steam, issuing from the jet with considerable velocity, raises and supports the ball *e* so long as the steam is kept up. But the principal contrivance for which Hero is famed, and one which in itself comprise nearly all the requisites of a complete prime-mover, is the "Æloipile.

This invention is, moreover, all the more remarkable and worthy of notice, from the fact that in recent times it has been introduced into practice as an economical steam-engine. Fig. 2 will explain the arrangement of its parts, and its operations. Let *a* be a caldron or vessel partially filled with water and placed on a fire; two pipes *b b* communicate with the interior of this, and are bent at the top at right angles; a hollow ball *c* revolves on the arms *b b*, and has two pipes *e d* placed at the opposite ends of its diameter; the ends of these pipes are made up, but apertures are made in the opposite sides of each. The steam rising through the tubes *b b*, passing into the hollow ball *c*, is ejected through the apertures in *e d*; the reaction of the opposite jets of steam on the surrounding air causes the globe *c* to rotate with rapidity on its axis, "as if it were animated from within by a living spirit." In fig. 3 the relative arrangements of the jets from the tubes *b c* is shown; the globe *a* revolving in the direction of the arrows. It is somewhat remarkable—as taking the era of the introduction of steam and heated air as a motive power much further back than is generally supposed—that Hero states that he made himself acquainted with the labours of his predecessors and contemporaries in connection with pneumatical contrivances, and that many of those which he describes in his *Spiritalia seu Pneumatica* were not of his own invention; thus inducing the belief that this power was known for ages previously, although its operation, doubtless, was only known to the priests, by whom it was applied chiefly, if not exclusively, for the purpose of exciting a belief in their worshippers of supernatural intervention. What schoolboy has not read of the mysterious Memnon, whose mystic utterance of sounds has even yet, in these utilitarian days, "a distinct and mysterious interest, for no myth of the most graceful mythology is so significant as its story." Yet the "seven mystic vowels, which are the very heart of mysteries to us," are said to have been produced by some of those pneumatic contrivances which Hero describes. "When the secrets of the waning faith," says an elegant writer, "were revealed by the votaries of a rival belief, the celestial harmony was then said to be produced by vapour, rising from water concealed in a cavity of the statue, being made to pass through a tube having a small orifice fashioned in a manner similar to that of an organ. As long as the fluid was heated by the rays of the sun, mysterious sounds were heard by the assembled worshippers, which died gradually away as the solar influence was withdrawn from the gigantic idol."



fig. 3.

At this stage of our progress an inquiry will naturally arise—how is it, that with all the ingenuity of the ancients, so fertile and so suggestive a power should have been allowed to remain developed only in the devices of priestcraft, and not have been adapted to the purposes of a varied and general utility? The cause of this apparent neglect may be traced to the same sources which influenced the obscurity which has hid from later times the arts of antiquity. For centuries no attention seems to have been paid to the development of the power of steam: nevertheless, there are sufficient indications of the fact that its power was not altogether

unobserved by philosophers and men attached to science; many in their writings hinting at the power to be derived from "vapour," and alluding confidently as to the capability of huge "engines" being forced into motion by the power of this agent. About the year 1121, according to William of Malmesbury, "there were extant in a church at Rheims, as proofs of the knowledge of Gerbert, a public professor in the schools, a clock constructed on mechanical principles, and a hydraulic organ in which the air, escaping in a wonderful manner by the force of heated water, fills the cavity of the instrument, and the brazen pipes emit modulated tones through multifarious apertures." On the revival of learning throughout Europe, the dissemination of the writings of the ancient philosophers doubtless attracted attention to many of these contrivances. There is some probability attached to the supposition that the invention of Blasco de Garay, a sea-captain, introduced into notice in 1543, was founded upon or derived from one of these. This was designed for the propulsion of vessels, and appears to have been comparatively efficient. Unfortunately no record is known to exist from which a knowledge of its parts can be ascertained. The following is the only account extant: "Commissioners were appointed by the Emperor Charles the Fifth to test the invention at Barcelona, on the 17th June, 1543; and the result was that a ship of 200 tons burden was propelled by the machine at the rate of three miles an hour." The moving force was obtained from a boiler containing water—liable, as was said, to explosion; and paddle-wheels were the propelling power. Strange as it may appear, no further result was obtained from this trial, and the invention was lost sight of. Towards the close of the sixteenth century numerous expedients and mechanical contrivances for raising water were described in published works; these being based in principle on the contrivances detailed by Hero. Baptista Porta, the well-known inventor of the camera-obscura, published in 1606 a commentary on Hero's *Pneumatica*, in which he describes the arrangement which is illustrated in fig. 4. Let *a* be a furnace, and *b* a small boiler or receptacle for the water to be heated; on the steam rising up the tube *c*, which is continued nearly up to the top of the air-tight box *d d* containing water, it presses on the surface of the water and forces it out through the tube *e*, which is continued down nearly to the bottom of the box *d d*. This contrivance, although the author made no application of it for the purpose of raising water, is worthy of notice, as it contains within

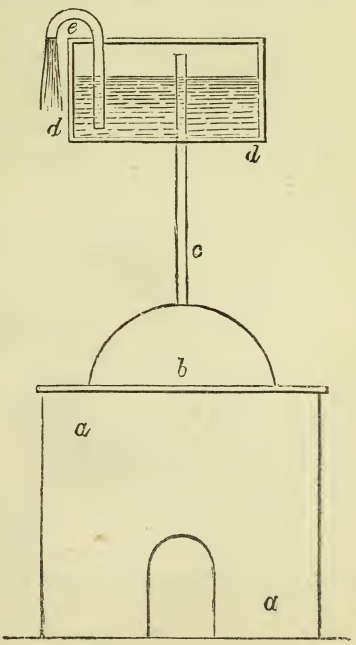

fig. 4.

itself the first known germ of an important distinction in steam-mechanism, namely, the adaptation of a separate vessel for containing the water to be raised, from that in which the steam or vapour was generated. Baptista Porta gives this arrangement merely as carried out in an experiment on the relative bulks of water and steam.

Solomon de Caus, in a work dated Heidelberg, in 1615, entitled *Les Raisons des Forces mouvantes avec diverses Machines tant utiles que plaisantes*, amongst a variety of insignificant and fanciful theories and descriptions, gives an arrangement by which water is raised above its level.



fig. 5.

In fig. 5 we give an illustration of De Caus' theorem on this point. Let *a a* be a ball of copper, having a pipe *c* by which to partially fill *a a* with water; another pipe *b b* reaching nearly to the bottom of the globe is also provided. On placing the globe on a fire and carefully stopping up the vent *c*, the steam or vapour pressing on the water in *a a* presses it up the tube *b b*.

In 1629, in a work published by Giovanni Branca, a description is given of a contrivance in which the force of steam was used as the actuating power. The water is heated in a vessel the upper part of which is fashioned like a head; from the lips of this a pipe or tube issues, which directs the steam against the vanes or boards of a wheel, made somewhat like an undershot wheel; this is made by the impinging of the steam on the floats or vanes, to rotate rapidly. The wheel is placed horizontally, as *b*, fig. 6; in the vertical axis of this a small trundle *c* is placed, which actuates the face-wheel *d*, and gives motion ultimately to stampers for compounding drugs in mortars. It is stated by some writers that this machine was actually in use for the above purpose; this is doubted, however, and it is

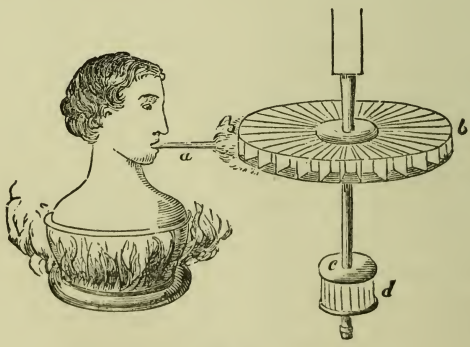

fig. 6.

doubtful, also, whether Branca was the real inventor, as his book is avowedly "a collection of machines invented by others; and this mode of moving a wheel by steam is probably, therefore, an idea of which he is the mere illustrator."

From the period now arrived at, up to the middle of the seventeenth century, history records no advances towards the improvement of the steam-engine. All the contrivances hitherto noticed seem to have been more the result of closet study than every-day practice: more to be looked upon as the playthings of our philosophers than the purposed inventions of the practical mechanic. To this, however, De Garay's steam-boat propeller may perhaps be an exception; nevertheless it can be classed only as an experiment, and the barren results of which, in all probability, arose from some inherent defect in its principle or construction. At all events, up to the interesting period we now approach, no useful application of steam to the practical purposes of every-day life had yet been successfully introduced.

In 1663 the Marquis of Worcester, a nobleman who had undergone many changes of fortune in the civil wars of England, published a work entitled "A Century of the Names and Scantlings of such Inventions as at present I can call to mind to have tried and perfected, which, my former notes being lost, I have, at the instance of a powerful friend, endeavoured now, in the year 1655, to set down in such a way as may sufficiently instruct me to put any of them in practice." Amongst the numerous devices which he enumerates, the following is the one which is closely connected with our present subject:—"An admirable and most forcible way to drive up water by fire; not drawing or sucking it upward, for that must be, as one philosopher calls it, *infra sphœrum activitatis*, which is not at such a distance: but this way hath no bounds if the vessel be strong enough; for I have taken a piece of a whole cannon whereof the end was burst, and filled it three quarters full, stopping and screwing up the open end, as also the touch-hole, and making a constant fire under it. Within twenty-four hours it burst, and made a great crack; so that having a way to make my vessels so that they are strengthened by the force within them, and one to fill after the other, I have seen the water run like a constant fountain-stream forty feet high. One vessel of water rarefied by fire driveth up forty of cold water; and a man that tends the work has but to turn two cocks, that one vessel of water being consumed, another begins to force and refill with cold water, and so successively; the fire being tended and kept constant, which the selfsame person may likewise abundantly perform in the interim between the necessity of turning the said cocks." The connection between this, the sixty-eighth proposition of the Marquis, and the two following, being the ninety-eighth and one hundredth, has been pretty conclusively established by a writer in the second volume of the *Glasgow Mechanic's Magazine:* "An engine so contrived," says the proposition, "that working the *primum mobile* forward or backward, upward or downward, circularly or cornerwise, to and fro, straight upward or downright, yet the pretended operation continueth and advanceth, none of the motions above mentioned hindering, much less stopping, the other; but unanimously and with harmony agreeing, they all augment and contribute strength unto the intended work and operation; and therefore do I call this a semi-omnipotent engine, and do intend that a model thereof be buried with me." The next proposition is as follows:—"How to make one pound weight to raise an hundred as high as one pound falleth, and yet the hundred pounds descending doth what nothing less than one hundred pounds can effect."

"Upon so potent a help as these two last-mentioned inventions, a waterwork is, by many years' experience and labour, so advantageously by me contrived, that a child's force bringeth up a hundred feet high an incredible quantity of water, even two feet diameter, so naturally, that the work will not be heard into the next room; and with so great care and geometrical symmetry, though it work day and night from one end of the year to the other, it will not require forty shillings' reparation to the whole engine, nor hinder one day's work; and I may call it the *most stupendous work* in the whole world: and not only with little charge to drain all sorts of mines, and furnish cities with water, though never so high-seated, as well as to keep them sweet, running through several streets, and so performing the work of scavengers, as well as furnishing the inhabitants with sufficient water for their private occasions,—but likewise supplying rivers with sufficient to maintain and make them portable from town to town, and for the bettering of lands all the way it runs. With many more advantages, and yet greater effects of profit, admiration, and consequence; so that deservedly I deem this invention to crown my labours, to reward my expenses, and make my thoughts acquiesce in the way of further inventions." "The *primum mobile*," says a writer of authority on the steam-engine, "is here evidently the force of steam, that, flow in whatever direction it may, is still capable of exerting the same mechanical power; and the movements, however numerous, can be made not to interfere with each other. The fall of a pound weight raising a hundred pounds weight, clearly refers to a mechanism like a piston: one weighing a pound attached to a lever would raise one hundred pounds as high as one pound falleth; and were the weight of water to fall on a water-wheel, for instance, as is now often practised, it would raise a quantity very nearly equal to its own weight, and to the same height from which it fell. A child's force, too, would be sufficient to turn a cock even of a large engine; and the small noise made by this description of machinery, and its working day and night without intermission or impairing its power, are circumstances in the use of the machine now familiar to every person. It would be difficult to give a *clearer* description of the action of a steam-engine in general terms, without a special explanation of its minutiæ and principles. In this case, however, it obviously was the intention of Lord Worcester to conceal both." No drawing of this form of engine is extant, by which a notion of its arrangements can be obtained. Diagrams have, however, been given by various writers, detailing arrangements by which the effects as noticed by the marquis could be obtained. Those curious in the matter, will find diagrams in Mr. Stuart's work, *Historical and Descriptive Anecdotes of the Steam-engine.*

It will be interesting to trace briefly the evidence which has been collected in support of the opinion that the Marquis of Worcester had actually carried his engine into practical effect, this being with many a debatable point. In looking over the proposition of his celebrated work, it will be observed that he speaks of having "*seen* the water" raised; of "*having a way* to make his vessels." Again, although the marquis's veracity may be doubted in these incidental notices, it is worthy of note that a manuscript found after his death bore this heading: "The Lord Marquis of Worcester's ejaculatory and extemporary thanksgiving prayer when first with his *corporeal eye he did see* finished a perfect trial of his water-commanding

engine, delightful and useful to whomsoever hath in recommendation either knowledge, profit, or pleasure." Other corroborative evidence might be given, but it is deemed sufficient to append a very conclusive statement of one who was neither influenced by prejudice or interest. The evidence to which we allude is that given by Cosmo de Medicis, Grand Duke of Tuscany, who visited England about the period of the invention, and whose movements during his travels were duly recorded by his secretary. Under date May 28th, 1699, is the following entry: "His Highness, that he might not lose the day uselessly, went again after dinner to the other side of the city, extending his excursion as far at Vauxhall, beyond the palace of the Archbishop of Canterbury, to see an hydraulic machine invented by my Lord Somerset, Marquis of Worcester. It raises water more than *forty geometrical feet* by the power of *one man only;* and in a very short space of time will draw up *four vessels* of water through a tube or channel not more than a span in width, on which account it is considered to be of greater service to the public than the *other* machine at Somerset House." "This, therefore, is superior in its operations to *another machine* by a *different mechanic, and applied to the same purpose.*" The following is the entry in the Duke's journal of the other machine to which allusion was made in the first entry: "His Highness went to see an hydraulic machine raised upon a wooden tower in the neighbourhood of Somerset House, which is used for conveying the water of the river to the greatest part of the city. It is put in motion by *two* horses, which are continually going round; it not being possible that it should receive its movements from the current of the river, as in many other places where the rivers never vary in their course." "Nothing can be more satisfactory," says Mr. Stuart, "than this last notice. The water in the hydraulic machine at Vauxhall, by the most easy inference, was *not* elevated by a water-wheel, otherwise the Grand Duke would not have omitted so striking a deviation from that at Somerset House. The effect was equal to that of another worked by two horses; and a tyro in mechanics would at first sight say, that no combination of machinery could accomplish that work by one man which it required the power of twelve men to do in another. From all the circumstances, therefore, it appears to us clear that this great effect was produced by some sort of a steam-engine: the very identical 'most stupendous water-commanding engine;' 'the semi-omnipotent engine;' the 'admirable and most forcible way to drive up water by fire.'"

The introduction of this, the first "feasible" scheme to produce useful effects by the power of steam, may be said to be the turning-point in the history of the steam-engine. From this time the march of progressive improvement was rapid and uninterrupted; invention followed invention, improvement succeeded improvement, until the steam-engine arrived at its present potent condition. From this stage of our labours we shall cease to record the crude and visionary speculations of the philosopher or enthusiast; but have the more useful and pleasant task of describing the practical results of the labours and ingenuity of our engineers and mechanics.

It is supposed by some engineers, that the method of raising water by steam, on the principle of atmospheric pressure (or the vacuum), was not unknown to the Marquis of Worcester; and that it is probable that in the engine mentioned by the Grand Duke of Tuscany this agency was taken

advantage of. This is, of course, mere conjecture; but in Savery's invention next in chronological order, now to be noticed, atmospheric pressure, or the formation of a vacuum, was a distinguished feature. The period of the introduction of this engine may be looked upon as the commencement of the *practical* era; the very mode in which the inventor ushered it into the world, and presented its claims to consideration, proved this. In place of clothing his description in the studied mysticism of words, which had been the endeavour of all those who had preceded Savery in describing inventions in connection with the subject, he fully explained the principles of its action and the details of its arrangements; and instead of giving exaggerated statements of its power and economy, he practically detailed the reasons why he believed it to be a cheaper method of raising water from mines than any other plan then in operation; and earnestly invited parties interested to inspect the machine in operation, and form their own opinion as to its working value. Very little is unfortunately known of this ingenious man.

In 1698 he obtained a patent from William the Third "for raising water, and occasioning motion to all sorts of mill-work, by the impellant

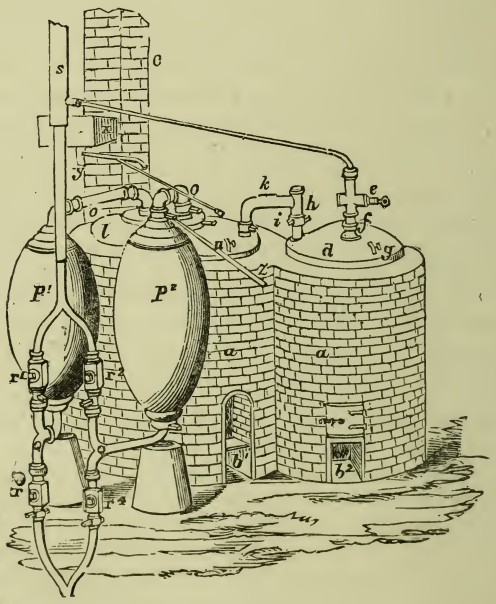

fig. 7.

force of fire;" and in 1699 he exhibited a model of his engine before the Royal Society, a description and illustration of which is given in their *Transactions*, vol. xxi. p. 228. In 1702 he published a work entitled *The Miner's Friend*, written in a lively and interesting style, and containing a full and circumstantial account of the arrangements and operation of the engine. The following is a description. In fig. 7, which is

a perspective view of the whole apparatus, "*a a* are the furnaces which contain the boilers; *b* 1, *b* 2, the two fire-places; *c*, the funnel or chimney, which is common to both furnaces. In these two furnaces are placed two vessels of copper, which I call boilers; the one large, as *l*, the other small, as *d*. *d*, the small boiler contained in the furnace which is heated by the fire at *b* 2; *e*, the pipe and cock to admit cold water into the small boiler to fill it; *f*, the screw that covers and confines the cock *e* to the top of the small boiler; *g*, a small gauge-cock at the top of a pipe going within eight inches of the bottom of the small boiler; *h*, a larger pipe, which goes the same depth into the small boiler; *i*, a clack or valve at the top of the pipe *h* (opening upwards); *k*, a pipe going from the box above the said clack or valve in the great boiler, and passing about an inch into it. *l l*, the great boiler contained in the other furnace, which is heated by the fire at *b* 1; *m*, the screw with the regulator which is moved by the handle *z*, and opens or shuts the apertures at which the steam passes out of the great boiler into the steam-pipes *o o*; *n*, a small gauge-cock at the top of a pipe which goes halfway down into the great boiler; *o o*, steam-pipes, one end of each screwed to the regulator, the other ends to the receivers *p* 1, *p* 2, to convey the steam from the great boiler into these receivers; *p* 1, *p* 2, copper vessels called receivers, which are to receive the water which is to be raised; *q*, screw joints by which the branches of the water-pipes are connected with the lower parts of the receivers; *r* 1, *r* 2, *r* 3, *r* 4, valves or clacks of brass in the water-pipes, two above the branches *o*, and two below them; they allow the water to pass upwards through the pipes, but prevent its descent; there are screw-plugs to take out on occasion, to get at the valves *r*; *s*, the forcing pipe, which conveys the water upwards to its place of delivery, when it is forced out from the receivers by the impellent steam; *t*, the sucking pipe, which conveys the water up from the bottom of the pit, to fill the receivers by suction; a square frame of wood, or a box with holes round its bottom in the water, encloses the lower end of the sucking pipe, to keep away dirt and obstructions; *x*, a cistern with a buoy-cock coming from the force-pipe, so as it shall always be kept filled with cold water; *y*, a cock and pipe coming from the bottom of the said cistern, with a spout to let the cold water run down on the outside of either of the receivers, *p* 1, *p* 2; *z*, the handle of the regulator, to move it by, either open or shut, so as to let the steam out of the great boiler into either of the receivers."

The method by which Savery managed to keep up the supply in the large boiler, for the purpose of evaporation, is highly ingenious. Let *a*, fig. 8, represent the small boiler, which is supplied with water from the force-pipe *s* by the pipe *e*, supplied with a stop-cock (fig. 7); a pipe, *h*, descends within eight inches of the bottom of the boiler, and is provided with a valve, *i*, opening upwards; this pipe is connected with the large boiler *l*. The following is the operation, as described in the inventor's own words: "When it is thought fit by the person tending the engine to replenish the great boiler (which requires about an hour and a half or two hours to the sucking one foot of water), he turns the cock *e*, so that there can be no communication between the force-pipe *s* and the small boiler *d*, and putting in a little fire under the small boiler at *b* 2 (fig. 7), the water will then grow presently hot; and when it boils, its own steam, which hath no vent out, will gain more strength than the steam in the great

boiler. . . . The water in the small boiler, being depressed by its own steam pressing on its surface, will force the water up the pipe *h*, through *k*, into the great boiler *l*; and so long will it run, till the surface of the small boiler *d* gets to be as low as the bottom of *h*; and then the steam and water will run together, and by its noise, and rattling of the clack *i*, will give sufficient assurance to him that works the engine that the small boiler hath emptied and discharged itself into the greater one *l*, and carried in as much water as is then necessary; after which, by turning the cock *c* again, you may let fresh cold water out of the force-pipe *s* (see fig. 7) into the lesser boiler *d*, as before; and thus there will be a constant motion and continual supply of the engine, without fear or disorder. And inasmuch as from the top of the small boiler *d* to the bottom of the pipe *h* there is contained about as much water as will replenish the great boiler *l* one foot, so you may be certain it is replenished one foot of course." Captain

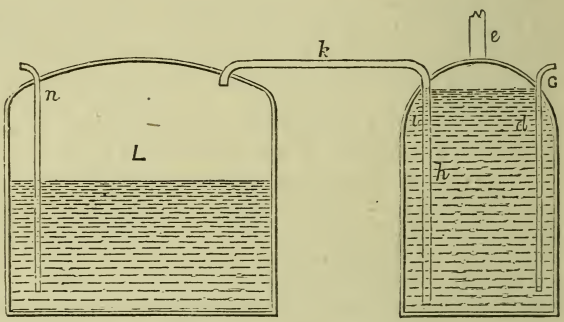

fig. 8.

Savery also introduced a contrivance by which the depth of the water in the boilers could be ascertained; this he termed a "gauge-cock," the principle of which is illustrated in fig. 8, at *c*, *n*, which are pipes continued down to within eight inches of the bottom of the boilers. When the attendant is desirous of knowing when the great boiler wants replenishing, he opens the stop-cock in connection with the pipe *n*; if water issues from it, the supply of water is sufficient; if steam issues from it, it is an evidence that the boiler requires a supply of water. By the cock *c* it is easily ascertained whether the small boiler requires a supply of cold water from the force-pipe *s*. This contrivance is still in use, the best evidence of the practical value of Savery's ingenuity.

Such is a brief description of Savery's celebrated "fire-engine," an invention remarkable alike for the judiciousness of its arrangements, and the practical purposes for which, at the period, it was introduced. Considerable discussion has arisen as to whether Savery really invented the engine, or derived his ideas from other sources, as the invention of the Marquis of Worcester. Desaguliers details an evidently got-up story of Savery having bought up the copies of the pamphlet of the marquis, with a view to do away with all evidence of priority of invention on the part of the marquis. There is no evidence that this was done by Savery: to buy up the

pamphlets of the marquis would have been a useless labour, for it is altogether improbable that all recollection of an engine erected at Vauxhall, as reported by the Grand Duke of Tuscany, should have vanished from the minds of many, then alive, who would have witnessed its action; moreover, many of the contemporaries of the marquis were alive at the period when Savery introduced his engine, some of them also members of the Royal Society, before which Savery, as we have seen, displayed a model of his engine. But the ingenuity of the arrangements of the engine itself conveys with it, we think, the undoubted stamp of originality. One honour—and that a high one—can at all events be ascribed to Savery without dispute, and that is of being the person who introduced into extended use an invention calculated to be of high practical value; and this labour, the work of which the world is not slow to estimate highly, he performed in the face of what he termed the "oddest and almost insuperable difficulties," with a perseverance and indomitable courage entitled to the highest commendation. And after all, he who, in spite of the opposition of prejudice and interest, succeeds in introducing into use inventions calculated to promote the interests of humanity, is entitled to a higher reward, and to have the value of his labours judged of from a higher standard, than he whose services are confined to the mere discovery or theoretical elaboration of a mechanical or philosophical invention.

Toricelli, after the death of Galileo, discovered that the flowing of water (open to the atmosphere) into any vacuous space was owing to the pressure of the atmosphere, acting upon all bodies at the earth's surface with a definite pressure. In 1672 the celebrated Otto Guericke, in his *Experimenta Magdeburgica*, detailed an apparatus by which he could raise heavy weights. In fig. 9 we give a diagram illustrative of the arrangement. Let *a* be a cylinder in which a piston *b* works, air-tight; the piston-rod *b* has a rope attached to it passing over the pulleys *c c*, and continued to suspend a board *e* containing heavy weights. Suppose that by means of an air-pump the space below the piston (the piston being raised to the top of the cylinder by the weights on *e*) is deprived of its contained air, and a vacuum, more or less perfect, produced, the pressure of the external atmosphere would cause the piston to descend, raising the weights on *e*; now if a small stop-cock were opened to admit air at the lowest part of the cylinder below the piston, the weights would pull the piston up to the top of the cylinder, the pressure of the atmosphere being equal on both sides of the piston. By making a vacuum, as before, beneath the piston, it would descend; and thus, by repeating the process, the weights might be made to ascend and descend. The efficiency of a vacuum to raise heavy weights was thus established by means of this arrangement, and was no doubt pretty universally known at the period of Savery's patent. It is clear, however, that to withdraw the air, to produce a vacuum by



fig. 9.

means of an air-pump, was too expensive and tedious an operation to be thought of as a working medium. Although there is no direct evidence of the fact, it is supposed that the Marquis of Worcester was acquainted with the method of forming a vacuum by condensing steam in close vessels; and, indeed, that the principle was carried out in the engine erected by him at Vauxhall. Savery introduced the principle in his engine, as we have already shown; indeed, in his patent, he claims "the method of making a speedy vacuum by condensing steam." But another claimant has been put forward for the honour of the discovery. This claimant is the well-known Denis Papin. Denis Papin was born in France. Being a Protestant, he was forced to leave France on the revocation of the edict of Nantes, and coming to England, was employed by the celebrated Mr. Boyle to assist him in his experiments. In 1680 he was elected a member of the Royal Society. It was during his stay in England that he invented his celebrated "digester," in which, with the aid of high-pressure steam, he dissolved bones, &c., and to which apparatus he applied the important contrivance known as the "safety-valve:" and which, under several modifications, is in use at the present time. He exhibited in 1685 a model of a machine for raising water; and in the description which he himself gave of it, it appears "that the water was raised by rarefying the air in the vessel, into which it was impelled by the pressure of the atmosphere on the air in the cistern. The mode by which he rarefied the air was carefully concealed." On being appointed to the Professorship of Mathematics at Marburg, in Germany, he left England in 1687, in which country, although he ranked high as a man of science, he had met with little encouragement to carry out his schemes. In Westphalia and at Auvergne he was employed to raise water by his machines; but he failed in doing so. This result was predicted by the celebrated Dr. Hooke. In 1690, in the *Acta Eruditorum* of Leipsic, he proposed a method of raising water by condensing steam in a cylinder. The following is a diagram illustrative of the arrangement proposed by Papin; let *a a*, fig. 10, be a cylinder supplied with a portion of water at *c*; *b* a tight-fitting piston, the stem or rod of which is passed through the cover of the cylinder; a lever *e* is pressed by a spring into a notch made in the piston-rod in such a way that the piston is kept suspended near the top of the cylinder, when the part in which the notch is made comes above the cover; a small pipe *f* is passed through the cover and the piston, and is capable of being kept closed at its upper extremity steam-tight. The piston being allowed to fall to the lower part of the cylinder, the stopper at the upper part of the pipe *f* is taken out, and water introduced beneath the piston to the space *c*. Fire is then applied to the cylinder *a*; the steam thus generated raises the piston. On the notched part rising above the cover, the lever *e* is pressed into it, which sustains the piston at the upper part of the cylinder. The fire is then withdrawn from the appa-



fig. 10.

ratus, and the cylinder being allowed to cool, the steam contained in it is condensed, and the lever *e* being withdrawn from the notch, the atmospheric pressure forces the piston to the lower part of the cylinder, carrying with it such weights as may be attached to the rod applied, as in fig. 10. A mere glance at the mode of operation of this engine—if engine it can be called—will suffice to show how incapable it was of being made a practically working apparatus. And yet it is really marvellous how, on the verge of a great discovery, Papin was content to pursue his investigations no further, and to "abandon his pursuit at the moment he had laid the foundation of the splendid mechanism of the lever engine, and had in his grasp a brilliant reward for a life of labour." With reference to the claim put forward by the advocates of Papin and Savery as to their discovery of the principle of the formation of a vacuum by steam, it is very evident that neither could substantiate his claim, as the fact that a vacuum could thus be formed was known before their time; long before, indeed, the principle of atmospheric pressure itself was established. Again, as to the charge brought forward against Savery, that he merely carried out the ideas of Papin, it is enough to know, that whatever might be the extent of the information Savery derived from the labours of others, he was the first to introduce a practically useful engine—distinct in many of its features from the schemes of others, and presenting those very qualities which took it out of the category of philosophers' toys or the "riddles" of men of science, and placed it in that of beneficial agents. And perhaps no better tribute can be paid to the value of Savery's engine, than the fact that Papin was so "thoroughly convinced of the superiority" of it that he abandoned his own contrivance, and adopted Savery's.

We now approach the period of introduction of a steam-engine of a still higher range of practical value than Savery's. Before we proceed further, however, it will be necessary to point out a few of the defects of Savery's engine. In the first place, the danger of using the engine was considerable from the high pressure at which the steam was used, and from there being no provision made for its escape when it reached a given point. Comparing it with that now adopted in certain circumstances, the pressure was not great; but the fact must be taken into consideration, that the state of the mechanical arts as then existing rendered it a matter of extreme difficulty, if not altogether an impossibility, to procure boilers and vessels so strongly and correctly made as to be considered safe under the circumstances of usual working. In the second place, to work the engine a large expenditure of fuel was necessary. That this expenditure was excessive may be gathered from these considerations:—As the vessel each time had to be filled with cold water to supply the vacuum, a certain amount of the steam used to force the water out of the vessel was condensed by coming in contact with the cold surface, and the water had to be heated for a small depth before the "steam was strong enough" to expel the water from the receiver. The cold surface of the interior of the receiver also, with which the steam came in contact, produced condensation to such an amount as to form a considerable item in the cost of working the engine. When to reduce this loss the sides of the receivers were only moderately cooled, a quantity of vapour of considerable pressure remained, impairing the vacuum and lessening the effective height to

which the water could be raised. This, in fact, operated at all times to such an extent as to limit the pressure of the atmospheric column to twenty or twenty-one feet. There was still another objection, and that a serious one, namely—to work the engine required an attendant, its efficiency being thus dependent on his carefulness and attention.

We have already explained the arrangement by which Papin proposed to make the vapour of water act on the surface of a piston moving in a cylinder. This arrangement, although defective, contained, as we have noticed elsewhere, the germ of the steam-engine in its practically working condition; and this mechanism of a piston and cylinder was that which was destined, under the hands of succeeding inventors, to be an important feature in the modern steam-engine. The inventor who adopted this mechanism, and whose engine we are now about to notice, is well known in the history of the steam-engine as Thomas Newcomen, ironmonger, of Dartmouth. In conjunction with John Cawley, glazier, of the same place —to whom, according to Desaguliers, he communicated his project—he had been prosecuting a series of experiments on the power of steam. In the course of his labours he had written to the celebrated Dr. Hooke, a well-known *savant*, who was intimately acquainted with the contrivances of Papin, with reference to his project. Dr. Hooke, in a letter to Newcomen, dissuaded him from expending time and labour in endeavouring to produce motion on Papin's plan, *i.e.* by piston and cylinder; and made use of the remarkable expression, "could he (referring to Papin) make a speedy vacuum under your piston, your work is done." This expression shows that Dr. Hooke must have been ignorant of the great rapidity with which steam is condensed by contact with a cold body: or from being convinced that Papin had not been able to effect the arrangements which he claimed as his own. Nothing daunted, however, by this most discouraging opinion from one who ranked high as an authority, Newcomen and Cawley still prosecuted their experiments, and ultimately brought out a machine, the components parts of which are still retained in one of the many forms of the steam-engine. In the patent granted to Newcomen and Cawley in 1705, the name of Savery was included. This arose from the fact that the latter was in possession of a patent for a "method of making a speedy vacuum by condensing steam." It does not appear, however, that Savery aided in carrying out the plan; and it is now conceded that, save receiving a portion of the profits, he had no further connection with the scheme; to the other patentees, therefore, must the honour of the invention be paid. It is right, however, to state that the assistance which Cawley rendered is unknown; and it appears probable that Newcomen was the principal party to whom the invention and its principal details were due.

The nature of the action and arrangements of the engine as first introduced by Newcomen may be gathered from the diagram in fig. 11. Let *a* be the furnace heating the boiler *b*: *c* a pipe conveying the steam to the interior of a cylinder *d*, the upper end of which is open to the air, in which a piston *e* works; this is attached to a lever *f* oscillating in the centre *g*, and having at its other extremity *h* a weight, as a pump-rod weighted, which, acting as a counterpoise, pulls the piston up to the top of the cylinder. Now, suppose steam to be introduced to the interior of the cylinder, and thereafter to be condensed by throwing cold water over the

exterior surface, a vacuum will be produced in the cylinder; and the atmosphere pressing on the upper side of the piston will force it downwards, and pull down the end *f* of the great beam, raising the end *h*, and along with it the counterpoise-weight or pump-rod there attached. The power of this engine will obviously depend on the surface of piston, the atmosphere exerting a pressure of about 14·75 lbs. on each square inch. Supposing the piston to be 50 inches in area, the weight which the engine would be able to lift would be nearly 800 lbs. This is the theoretical view of the case; the practical one is widely different. The effect obtained, as above noticed, depends on the absence of friction and the perfect formation of a vacuum. None of these desiderata, in the earlier stages of the engine, could be obtained. To reduce the friction of the piston moving in the cylinder, the piston was provided with "packing" placed round its edges, and made of hemp or leather well lubricated. The friction, however, of the piston and working-beam was of so considerable an amount, that it

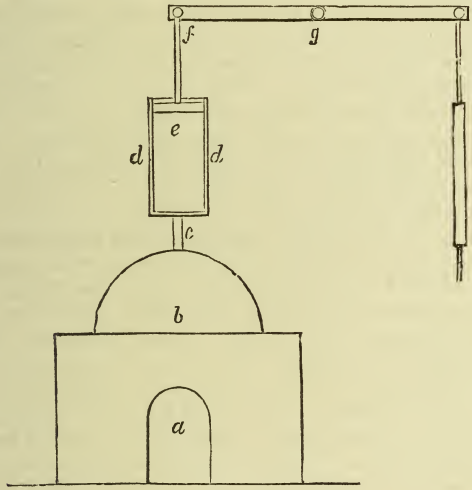

fig. 11.

detracted much from the working capabilities of the engine. The bad formation of a vacuum also reduced its working-power. When the void was imperfect, the vapour remaining in the cylinder resisted the atmospheric pressure in proportion to its temperature; this being tantamount to reducing the weight which could be lifted at the end of the beam. The fall of the piston was also prevented to a certain extent by air, which entered into the cylinder along with the steam from the boiler; this air not being condensed by the cold water, remained in the interior of the cylinder, and operated as an opposing power to the descent of the piston. This defect, which was termed *wind-logging*, continued to increase in power with the operation of the engine; and unless means had been afterwards adopted, the air would have so increased in volume as to stop the motion of the engine. The form of engine introduced first by Newcomen

resembled in some points that of Papin; an essential difference between them will, however, be obvious on consideration. In Papin's engine the piston was raised by the force of the steam; it required, therefore, to be of a pressure considerably above that of the atmosphere. In Newcomen's engine, the steam was used at the ordinary pressure, or 212°, and only as a means of producing a vacuum beneath the piston, and thus aiding the atmospheric pressure by the improved mechanical means. The substitution, moreover, of the beam and connecting-rods opened the way to a great number of applications. Hence it will be observed that the name, "atmospheric engine," by which Newcomen's contrivance was known, was not so inappropriate.

We now proceed to detail the various improvements introduced from time to time, which resulted in bringing the atmospheric engine to comparative perfection. And first, as to the formation of a vacuum in the cylinder. In the engine already described, the cold water, to produce the vacuum, was originally thrown over the exterior of the cylinder. This plan was productive of much loss of working effect, as the boiler, placed immediately beneath the cylinder, received the plashings of the cold water on its surface, and this happening at every stroke of the engine, tended to condense the steam in the boiler. To obviate this, the cylinder was surrounded with an outer case, leaving a space between it and the interior cylinder, into which space the cold water was introduced. A practical inconvenience was soon discovered to attend this plan, as the water soon became heated, and therefore became comparatively useless in producing a vacuum in the interior of the cylinder. Again, it was necessary that, during the time when the cylinder was being filled with steam, the water in *the space* should be nearly of the same temperature as the steam. Means, therefore, were adopted by which this hot water was quickly withdrawn from the space as soon as the cylinder was filled with steam, and cold water supplied, to produce the vacuum. These desiderata were effected by supplying the cold water from a cistern placed immediately above the cylinder, and by leading a pipe from the space between the cylinder and its casing to a small reservoir. The heated water thus obtained was conveyed to the boiler, compensating in some measure for the loss of power from causes already named. It is evident that if no means were taken to prevent it, the successive condensations of the steam in the interior of the cylinder would produce water, which in time would fill it. To remove this water, a pipe was inserted in the bottom of the cylinder, and conducted to a distance of at least thirty feet below it. It was necessary to take this so far down to counteract the force of the atmospheric pressure, as the pipe communicated with a vacuum.

The air which found its way to the interior of the cylinder was ejected into the atmosphere through a pipe furnished with what was called a *snifting-valve*, opening upwards into a kind of cup containing water. As the piston descended it forced the air through this valve, the water keeping it tight after the air escaped. The piston was rendered tight by a small quantity of water placed on its upper side; this was supplied by a small pipe from the cistern above the cylinder. The pipe from the boiler to the cylinder was furnished with a cock, by which the supply of steam was regulated.

The operation of the engine, as thus constructed, is easily understood.

On the steam being raised at a temperature of 212°, and the cock on the steam-pipe opened, the counterpoise—suppose this to be the weighted rod of a pump for withdrawing water from a mine—draws the piston to the top of the cylinder; the supply of steam is then shut off by turning the cock on the steam-pipe to its original position. The cold water is now admitted to the space between the cylinder and its casing, the steam under the piston being condensed; the atmospheric pressure on the upper side of the piston forces it downwards, drawing along with it the end of the beam, and raising the other, and also the water in the pump; the cold-water cock is then shut, and the steam opened. An equilibrium being thus established on both sides of the piston, the counterpoise draws it up to the top of the cylinder; the cock of the pipe to withdraw the hot water from the space around the cylinder is opened, and the water descends to the cistern; the cold-water cock is immediately opened, and the condensation being effected, the piston descends as before.

In the spring of 1712 Newcomen succeeded in obtaining a contract for drawing water from a mine at Wolverhampton. The erection of this engine was the occasion of a quicker means of obtaining a vacuum being accidentally discovered. As before described, the piston was kept tight by water playing on its upper surface; on the first trial of this engine, it made several strokes in quick succession. "After a search, they found a hole in the piston, which *let the cold water in to condense the steam in the inside of the cylinder.*" The method of effecting the condensation was therefore changed; and effected henceforth by injecting cold water into the interior of the cylinder. The diagram in fig. 12 shows this arrangement: *a a* the cylinder, *b* the piston, *c* a pipe leading from the cold-water cistern, and provided with a cock to regulate the supply; the lower extremity of this pipe is inserted in the bottom of the cylinder, and the water is delivered in the form of a jet *d*, and, diffusing itself among the stream, the condensation is quickly effected; *e* the snifting valve and pipe; *f* the pipe 30 feet long, for taking away the hot water from the cylinder. This plan of obtaining a quick condensation suggested also a means of regulating the speed of the engine in cases where the weight to be lifted was variable, by throwing in a greater or less quantity of injection-water, thus producing a vacuum more or less perfect. Notwithstanding the very great improvements thus effected in the atmospheric engine, its usefulness was much restricted, and this from the unremitting attention which its operation demanded from the attendant. "When, for instance, the attendant opened the steam-cock, he was obliged to watch the descent of the piston, and at the instant when it was elevated to the proper height, it was to be again quickly shut, and at the same moment the injection-cock was to be opened. If the one did not follow the other, there resulted a great loss of vapour, or of effect; and this difficulty was further increased by the irregular production of the



fig. 12.

steam itself, from the varying intensity of the heat of the furnace. After the injection had condensed the steam, and the piston was at liberty to descend, if the communication between the boiler and the cylinder was not opened at the precise instant when it had reached the limit of its downward movement, the immense weight on the piston, falling into the vacuum with a great velocity, would shake the apparatus to pieces. All this precision was required too from a mercenary attendant fourteen times every minute, at the hazard of the total destruction of the apparatus." It is obvious, then, that the further introduction of the engine depended on some method being discovered of making its movements self-acting. According to Desaguliers the honour of the invention of the self-acting movements is due to an idle boy of the name of Humphrey Potter, an attendant on the engine. The following is the statement: "It was usual to work with a buoy in the cylinder, enclosed in a pipe, which buoy rose when the steam was strong, and opened the injection-pipe, and made a stroke, whereby they were only able, from this imperfect mechanism, to make six or eight strokes in a minute, till a boy named Humphrey Potter, who attended the engine, added what is called a scoggan, a catch that the beam or lever always opened; and then it would go fifteen or sixteen strokes in a minute." In the year 1718 an engine was erected with self-acting movements, termed "hand-gear," the invention of Mr. Henry Beighton, an engineer of Newcastle, and which consisted of a series of tappets operated on by the beam, and by which the various cocks were opened and shut as required. The following is a description of the means employed for this purpose:—the entrance to the steam-pipe was covered with a sliding-valve placed inside the boiler; this valve was worked by a lever attached to the



fig. 14.



fig. 13.



fig. 15.

spindle of the valve which projected through the top of the boiler, as in fig. 13, where *a* is the steam-pipe, *b* the sliding-valve, the spindle of which passes through *c*, and is worked by the bent lever *d*. To this bent lever a horizontal one *e*, fig. 14, is connected; the other extremity is formed

into a fork at *f*; a spindle joins the two extremities of the fork; and two stirrups, as at *g*, connected each side of the fork with an axle rotating on the centre *h*. This axle was made to move by the pins in the beam *n n* striking the ends of the spanners *k m*, which were firmly fixed in the axle *n*. On the axle, at a position between the two prongs, a lever called a *tumbling-bob* was fixed, having a Y-end, or two projecting arms *i i*, and a weight at the other. The injection-cock was opened and shut by the mechanism shown in fig. 15. Let *a a* be the beam corresponding to *n n*, in fig. 14, having projecting-pins which strike the end of the lever *d*, terminated with a toothed quadrant taking into a second quadrant, fixed on the spindle of the injection-cock. The following is the operation of the apparatus: on the beam *n n* falling, a tappet, or projecting-pin, strikes one of the spanners *k*; this turns the axle vibrating at *n*, and causes

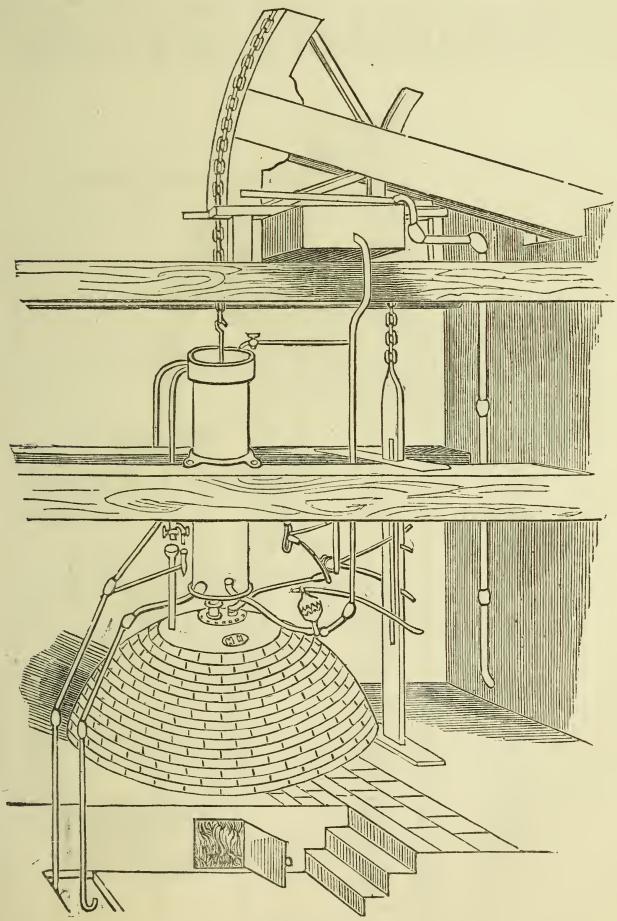

fig. 16.

the tumbling-bob to fall over with considerable force, one of the arms *i* striking the bar which joins the two prongs of the fork *e f*; this pulls forward the lever *e* towards the beam, and opens the steam-cock *b*, fig. 14. Simultaneously with the striking of the tappet on the spanner *k*, another tappet strikes the end of the lever *d*, fig. 13, and operating on the quadrants *f g*, shuts the injection-cock *h*. The piston is now drawn upwards by the counterpoise. On arriving within a short distance of the top of the cylinder, a tappet strikes the spanner *m*, fig. 14, and causes the tumbling-bob to fall over, moving, as before, the lever *e* from the beam; one steam-valve is thus shut, and by means of the tappets, lever, and quadrants, the injection-cock *h*, fig. 15, is opened. By means of these contrivances the atmospheric engine was rendered self-acting. Thus improved, the machine remained for a considerable period *in statu quo*. Minor improvements were from time to time introduced; but it was reserved for the celebrated engineer John Smeaton to bring it to as great a state of perfection as was possibly allowed by the nature of its principle. In fig.

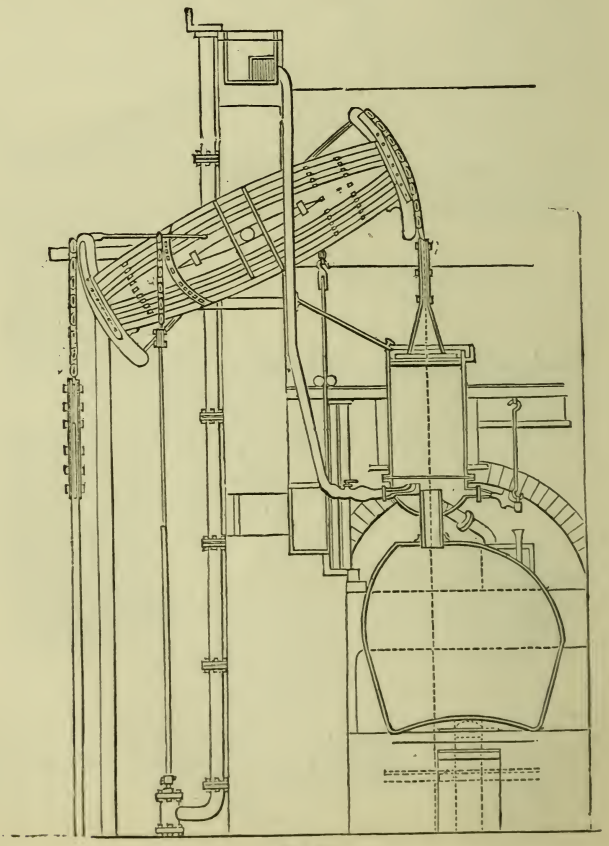

fig. 17.

16 we give a diagram illustrative of the general arrangements of an atmospheric engine, after the introduction of the self-acting movements of Beighton, and anterior to the improvements of Smeaton.

In 1767 Smeaton was employed to construct an engine for the New River Company, and he availed himself of this opportunity to introduce several improvements.

The result of the experiments conducted with a trial engine Smeaton carefully tabulated, and took as a guide to regulate his future practice. The engines of a large class which he afterwards erected fully verified by their performance the correctness of his assumptions, and evidenced the practical care with which he had, in this as in other matters, conducted his experiments. In 1772 he was employed to construct an engine at Long Benton Colliery, at Newcastle, and in this he introduced the several improvements suggested by his experiments, similar in construction to that introduced by Beighton; it was, however, "distinguished by juster proportions and greater nicety of detail than had yet been realised; and the innovations thus introduced were found to be highly beneficial in practice." The engine erected by Smeaton, and known as the "Chacewater Engine," was the most celebrated of his performances. This is illustrated in fig. 17. Although there is nothing in connection with the improvement of the atmospheric engine which can be said to be the invention of Smeaton, still the high praise is due to him of "giving the most perfect form and proportion to those materials supplied by his predecessors and contemporaries."

Such, as we now leave it, was the degree of perfection to which the steam-engine had arrived. The principles of its action apparently precluded the attainment of a higher degree of practical usefulness, and it remained for a brighter genius and a more original mind to thoroughly grapple with and to understand its defects, and, by opening up a new path of discovery, to place the steam-engine, as a social power of rare value, in the high position to which its wonder-working powers have fairly entitled it.

CHAPTER II.

THE HISTORY OF THE INTRODUCTION OF THE MODERN STEAM-ENGINE.

In the year 1736, at the little town of Greenock, on the banks of the Clyde, James Watt was born. Of a slender form, sickly appearance, retiring and bashful in his manners, and bearing with him no evidence of an intellectual capacity superior to his fellows, this youth, unaided by family, wealth, or station, or even by the adventitious aids of an early liberal education, was destined, during a long and active life, to be the means of introducing a power which aided this country materially during a time of difficulty and danger, and to leave behind him a name world-wide in its reputation.

When about sixteen years of age, he became acquainted with an obscure mechanic in Glasgow, who, "by turns a cutler and whitesmith, a repairer of fiddles, and a tuner of 'spinnets,' was a useful man at almost everything," and in consequence of adding to this list of accomplishments "a knowledge of the construction of mathematical instruments and of 'spectacle-glasses,' he was dignified by the title of 'optician.'" To this individual Watt, in his sixteenth year, was apprenticed, chiefly, as is probable, from the fact that it offered an easy calling suitable for his delicate health, than from any inducement it held out as that by which he could afterwards make a fair livelihood. After a short apprenticeship of less than two years, James Watt removed to London, where he succeeded in obtaining employment under a regular mathematical-instrument maker. Here he obtained that knowledge of business habits and processes which had been withheld from him in his earlier engagement. His stay in London was very limited, and probably from a severe cold which he caught while following his avocations, and the effects of which he felt for many years afterwards, he returned to his native town after an absence of little more than a year. He next endeavoured to raise a business of his own, and began to practise both in Greenock and Glasgow. In the latter place he met with an obstacle which threatened to put a sudden stop to his progress; this arose from the fact that he was not a "freeman," or "burgess," of the town. One spot, however, existed, within the boundaries of which all such absurd laws and regulations were inoperative, this was the "College of Glasgow." By the kind offices of some of the dignitaries, Watt was appointed mathematical-instrument maker to the university, and a room was allotted him within its precincts, in which he could carry on his avocations without molestation. Thus was the apparently untoward circumstance amply compensated for. And it is by no means idle to conjec-

ture what would have been the results on the future progress of the steam-engine had that absurd law not been in existence which drove Watt out of what might be looked upon as the open path of commerce, to take refuge in the place, of all others, the best fitted for, and offering the most eligible opportunities of, carrying on the series of experiments which, by a fortuitous chain of circumstances, were shortly presented to his notice, and by the successful prosecution of which he was destined to make himself so famous.

In the year 1759, while in this situation, Watt had his attention directed to the subject of the steam-engine by Mr. Robinson, afterwards Professor of Natural Philosophy in the University of Edinburgh, and author of the well-known work entitled *Elements of Mechanical Philosophy*. The scheme proposed had reference to the moving of wheel-carriages by the aid of steam; but in consequence of Mr. Robinson leaving college, it was abandoned. Two years afterwards, however, Watt again returned to the subject, and instituted some experiments with a Papin's digester; and formed a sort of steam-engine "by fixing upon it a syringe one-third of an inch in diameter, and furnished," says Mr. Watt, whose own account we now quote, "also with a cock to admit the steam from the digester or shut it off, at pleasure, as well as to open a communication from the inside of the syringe to the open air, by which the steam contained in the syringe might escape. When the communication between the cylinder and digester was opened, the steam entered the syringe; and by its action upon the piston, raised a considerable weight (15 lbs.), with which it was loaded. When this was raised as high as was thought proper, the communication with the digester was shut off, and that with the atmosphere opened; the steam then made its escape, and the weight descended. The operations were repeated; and though in this experiment the cock was turned by hand, it was easy to see how it could be done by the machine itself, and make it work with perfect regularity. But I soon relinquished the idea of constructing an engine upon this principle, from being sensible it would be liable to some of the objections against Savery's engine, namely, from the danger of bursting the boiler, and the difficulty of making the joints tight; and also that a great part of the power of the steam would be lost, because no vacuum was formed to assist the descent of the piston."

Two years after relinquishing his experiment, as above stated, his attention was again directed to the subject, by a model of a steam-engine on Newcomen's plan, belonging to the Natural Philosophy class, which was placed in his hands to be repaired (1763-4). At first directing his attention to the dry matter-of-fact details of the task intrusted to him, his active mind at length received a new impulse from the result of one or two trials of the engine, and he directed the full energy of his intellect to master the principle of the machine, and to ascertain the cause of its defects as a prime-mover. In conducting the experiments, two things attracted his attention; the first was the great loss of steam from the condensation caused by the cold surface of the cylinder; secondly, the great quantity of heat contained in a small quantity of water when converted into steam. If a quantity of water is heated in a close boiler some degrees above the boiling-point, and the steam suffered to escape suddenly, the temperature of the boiling-water remaining in the boiler will be reduced

to the ordinary boiling-point. The steam, however, which escapes, although carrying off all the excesses of heat, would, if condensed, form but a small quantity of water. The saving of this heat was therefore a matter of the highest importance. The loss of steam occasioned by the alternate heating and cooling of the cylinder was sufficient to fill the cylinder three or four times, and to work the engine. "By means of a glass tube inserted into the spout of a tea-kettle, he allowed the steam to flow into a glass of cold water until it was boiling hot. The water was then found to have gained nearly a sixth part by the steam which had been condensed to heat it, and he drew the conclusion that a measure of water converted into steam can raise about six measures of water to its own heat, or eighteen hundred measures of steam can heat six measures of water." "Hence he saw that six times the difference of temperature, or fully 100 degrees of heat, had been employed in giving elasticity to steam, and which must all be subtracted before a complete vacuum could be obtained under the piston of a steam-engine." "Being struck," says Mr. Watt, "with this remarkable fact, and not understanding the reason of it, I mentioned it to my friend Dr. Black, who then explained to me his doctrine of latent heat, which he had taught some time before this period (summer of 1764); but having been occupied with the pursuits of business, if I had heard of it I had not attended to it, when I thus stumbled upon one of the material facts by which that beautiful theory is supported." In making his experiments, Watt found that the boiler of the model, although of size sufficient according to the standard then in use, did not supply steam fast enough for the wants of the engine, which had a cylinder two inches diameter and six inches stroke. A large quantity of injection-water was also required to effect a very imperfect vacuum. These defects he attributed to the fact that a small cylinder consumed a greater quantity of steam than a larger one, in consequence of the condensation caused by the increased surface in proportion to its capacity. This defect he sought to remedy by substituting a cylinder made of materials which would conduct heat more slowly than brass, of which the model cylinder was made. For this purpose he constructed one of wood soaked in linseed-oil, and baked dry. This, however, was a failure, for in addition to its want of durability, an essential feature in practice, it was found to condense the steam as much as before. The principal loss sustained was evidently, therefore, by the alternate heating and cooling of the cylinder; and the conviction was forced upon him that the grand secret lay in being able to effect the condensation of the steam without cooling the cylinder. To the attainment of this, Watt directed his whole energies, and in the year 1765 the felicitous idea struck him, "that if a communication were opened between a cylinder containing steam, and another vessel were exhausted of air and other fluids, the steam, as an expansible fluid, would immediately rush into the empty vessel, and continue to do so until it had established an equilibrium; and if that vessel were kept very cool by an injection or otherwise, more steam would continue to enter until the whole was condensed." This brilliant idea was soon put to the test of experiment and found correct; and thus was solved the great problem which had for so many years perplexed and baffled his predecessors. It is said that as soon as this happy thought had been realised, all the train of details necessary to carry it into efficient practice followed in rapid succession; and that

not for a moment had he any hesitation in conceiving the rapid and immediate perfecting of the whole machine. In carrying out the idea into practice, the first difficulty that presented itself to the mind of Watt was, doubtless, a means of relieving the condenser from the accumulated water which would result from the successive condensations effected in it. This might, of course, have been drawn away by the simple force of gravity, by using a pipe thirty feet long, as in Newcomen's engine. This plan, however, could not be effectual for removing the uncondensed steam, or the air that might find its way into the condenser. Some other plan was therefore desiderated. Watt proposed and adopted a pump which would draw off the contents of the condenser, this pump to be worked by the engine itself. This constituted another step towards the perfecting of the mechanism: others rapidly followed. The next improvement was surrounding the cylinder with a casing, by which the heat would be retained. This of itself, however, would not effect the desired end: he therefore, to prevent the action of the cold atmosphere on the upper surface of the piston, and on the interior surface of the cylinder, which would necessarily be exposed on its descent, closed the top of the cylinder with a close-fitting cover, in the centre of which the piston-rod worked through an aperture rendered tight by what is termed a "stuffing-box." The necessity of adopting the next expedient suggested to him was thus made obvious; and in place of the power of the atmosphere he employed the "*elasticity of the steam from the boiler to impel the piston down the cylinder.*" By this arrangement the method previously adopted to keep the piston tight, by water on its upper surface, was done away with; and instead, Watt adopted a hemp-packed piston lubricated with tallow. Thus, by successive improvements, the atmospheric engine was changed into a "steam-engine."

Before *illustrating* the improvements introduced by Watt, we propose to trace further the points connected with their history. Although the claim of Watt to the originality of the idea of separate condensation is now generally, if not universally, acknowledged, still it is but right to notice that of another party to this high honour. A claim is put forward by Mr. Hornblower, a rival and contemporary of Watt, in Gregory's *Mechanics* (vol. ii. first edition, p. 362).

Having satisfied himself as to the correctness of his principle, Watt proceeded to test it still further by the aid of a model on a large scale. The cylinder of this model was 9 inches diameter, and the piston-rod was attached to a balanced beam. An accident, however, occurred, which, along with his want of means, as well as of time to prosecute his experiments, brought his labours to a close. Having taken up the practice of a land-surveyor and engineer, and his time being pretty fully occupied, the invention lay dormant on his hands for three or four years. His silence on the matter doubtless proceeded from a variety of causes, the principal of which was, likely, the fact, that as a fair trial could only be given to his engine on a large scale, the risk of bringing it out would be too great, the apparatus required being exceedingly costly. From Watt's practice as an engineer, he became acquainted, however, with the celebrated Dr. Roebuck, an enterprising English gentleman resident in Scotland. An able practical chemist, he had succeeded in discovering a method of making sulphuric acid at a comparatively low cost; and being possessed of business

habits and qualities of the first order, he succeeded in establishing at Prestonpans, near Edinburgh, a manufactory, in which the process was carried out on a large scale. The profits accruing from this establishment were such that he gave up the practice of his profession, and confined his attention to carrying out commercial projects on a large scale. He founded the celebrated iron-works at Carron, which, as a project, were highly successful. Urged by his success in this undertaking, he leased the estate of Kinneil, a few miles from Carron, and which contained extensive beds of coal. While carrying on his operations there with the same energy which characterised his other proceedings, he became acquainted with Watt, who, no doubt, struck by his ability and business habits, looked upon him as one in every respect calculated to aid the undertaking of bringing the steam-engine into practice, and accordingly confided to him the secret of his discovery. Dr. Roebuck consented to bear the expense of conducting trials on a large scale; and Watt forthwith proceeded to construct a large engine under his inspection. For a period of eight months, alterations and improvements succeeded each other, until at last the engine was brought to a state of comparative perfection—so far, at least, as could be attained, from the imperfect style of workmanship then available. The engine was tried at a coal-mine on Dr. Roebuck's estate; and such was the satisfactory nature of its operations, both as regarded the great saving of fuel and the water used for condensation, that Dr. Roebuck was satisfied as to its powers and capabilities, and closed with Watt, supplying the necessary funds to take out a patent, and to establish a manufactory for the production of the engines; the terms of partnership being, that the money for the above purposes was to be found by Roebuck, he obtaining two-thirds of the profits. On these terms Watt proceeded with his patent, which was taken out in 1769, after which he proceeded to perfect the details of his engine. From the bad workmanship which he had to contend with, his difficulties were of a serious kind; that which harassed him most being the difficulty of keeping the piston tight without incurring a heavy loss by friction. But another obstacle was about to be thrown in the path of progress, and which at one time bade fair to utterly ruin Watt's prospects of receiving a pecuniary reward for his great labours: this was the bankruptcy of Dr. Roebuck. The coal-fields of Kinneil, instead of throwing a golden shower of profits into his lap, were the means of bringing him to ruin. But this apparently untoward circumstance was the means of ultimately placing Watt in the eminent position which he afterwards occupied; so true, as we often find it, is the saying, that "man's extremity is God's opportunity."

The party with whom Roebuck negotiated for a transfer of his rights in the patent of Watt, was the celebrated Matthew Bolton, of Soho, near Birmingham; a man whose name will always be handed down to posterity in conjunction with his more celebrated compeer. The transfer was effected, and a partnership formed between Bolton and Watt. In character the very opposite in many respects of Watt, Bolton was possessed of rare business talents, an extensive acquaintance with business forms, and having that indomitable spirit of "perseverance which insures success" in an eminent degree; these, united with a degree of courage in prosecuting his engagements in the face of difficulties, rendered him a fitting coadjutor for the retiring and unambitious Watt.

At the period of the transfer of Roebuck's rights in the patent to

Bolton, Watt was engaged in surveying in the north of Scotland. Shortly after the death of his wife happening, he was induced to accept of the invitation of his partner, and to take up his abode at Soho.

Watt was now in a position to prosecute his labours with vigour, and surrounded by those mechanical appliances, without which the attainment of perfection in the working details was hopeless. An engine was accordingly erected; and many Cornish adventurers, on invitation, greatly interested in the success of the engine, examined its operation. In their report they gave a favourable opinion as to the saving of fuel effected by it. Some years of the term for which the patent was valid had, however, expired; and fearful that its whole period would pass over before pecuniary results accrued, so as to afford a profit, or to reimburse the large expenses which had been gone to in perfecting the engine, Watt, at the suggestion of Bolton and his other friends, applied to parliament for an extension of his patent. This, after some opposition, was granted for the term of twenty-five years, dating from the time of the grant, namely, 1775. This extension was no doubt deserved, no less a sum than £50,000 having been expended in the manufacture of the engines by the firm before any return was realised. Having thus secured for a lengthened period the profits which might accrue from the sale of the engines, Watt was now in a position to introduce his machine with every advantage to the public. In this he was materially assisted by the admirable commercial arrangements of Bolton, who, after the grant of extension, became a partner with Watt in the manufacture of the machines; thus sharing the profits on this head, as well as those derived from a monopoly of the principle. "Had Watt," says Playfair, "searched all Europe, he could not have found another man so calculated to introduce the invention to the public in a manner worthy of its importance."

The most public and open inspection of the engines at work was invited, and every means taken to afford just opportunities of ascertaining their value. A congress of mechanics and scientific men was convened at Soho, and an elaborate series of trials made and comparisons instituted between its working capabilities and one on the principles of Newcomen of the best construction, in order to show the superior working capabilities of the new engine; these were manifest to all. But still further to place the merits of the machine on a basis which would satisfy all as to the character of its claims, the patentees issued the following: "All that we ask from those who choose to have our engines, is *the value of one-third part* of the coals which are *saved* by using our improved machines, instead of the old. With our engine, it will not, in fact, cost you but a trifle more than half the money you now pay to do the same work, even with one-third part included; besides an immense saving of room, water, and expense of repairs. The machine itself which we supply is rated at that price which would be charged by any *neutral manufacturer* of a similar article. And to save all misunderstanding, to engines of certain sizes certain prices are affixed." To aid in the introduction of the new machines, Bolton and Watt took old atmospheric engines off the hands of those who wished to lay down the improved form, and this frequently at a rate above their value.

Again, in estimating the power of their engines, or calculating the work which each could perform, Bolton and Watt, instead of placing the

estimate of a horse's work at a low figure, and thus in the same proportion increasing the power of their engine, they actually increased the power of a horse's work to one-third. Smeaton had valued the work done by a strong horse as equal to lifting a weight of 22,000 pounds one foot high in a day; Bolton and Watt estimated it at 33,000. But more than this, they stated that their engines were "calculated so, that they will raise 44,000 pounds one foot high with a bushel of coals; and when we say our engines have the force of five, ten, or more horses, we mean and guarantee that they will lift 44,000 pounds for each horse-power." On these terms, an engine which, according to Smeaton's estimate, was equal to twenty horses, was, according to Bolton and Watt, only equal to ten; thus giving the purchasers of the new engine an advantage of 100 per cent. in value for no increase of cost.

Thus placed before the public on terms so highly liberal, the invention made rapid progress in public favour; and some idea of the profits accruing may be derived from the fact, that at Chacewater mine, Cornwall, the saving of fuel effected was equal to £6,000 annually; £2,000 of revenue from this one source being drawn by the firm.

The manufacture of the engines increased with such rapidity, that the original establishment at Soho was found too limited in its dimensions for the great quantity of work now found to flow into the factory. Another was therefore constructed in the neighbourhood, in which the operations could be carried on with that degree of concentration so essential to the turning out of work rapidly and efficiently.

Having thus brought up our historical notes in connection with Watt's engines to the contemplated point, we are prepared to proceed to the illustration of the successive steps of his invention, and of those beautiful contrivances which emanated from his mind.

The diagram in fig. 18 will illustrate the arrangements of parts of the early engines introduced by Watt for pumping the water from mines. Let *a* be the cylinder, in which the piston *b* works a rod passing through a steam-tight stuffing box *c*; the cylinder is surrounded by an external casing *d d*, into the space formed by which the steam enters from the boiler through the pipe *e*. By opening the valve *e*, the steam is introduced to the pipe beneath the cylinder, and introduced into its interior through the aperture *f*. By opening the valve *g*, the steam is allowed to pass down to the interior of the condenser *h*. In this diagram the piston-rod is supposed to be attached to the end of the great beam which works the mine-pump, and the valves to be worked by mechanism, which we shall figure afterwards.

Before starting the engine, the air was extracted from the various parts. This was effected by opening the valves, and allowing the steam to flow into all the vessels and pipes; the air is thus forced down the pipe to the condenser *h*, and through the valve which connects this with the air-pump *j*. The valve *e* is then shut, thus preventing more steam from entering the cylinder *a* through the aperture *f*; at the same time the steam in the condenser *h* is condensed by the cold water which surrounds it, and supplied to the cistern *m m*, in which it stands, by the spout *n*, supplied by a common force-pump worked by the great beam. The vacuum being thus formed beneath the piston *b*, the pressure of the steam which has free access to the upper side of the piston, forces it

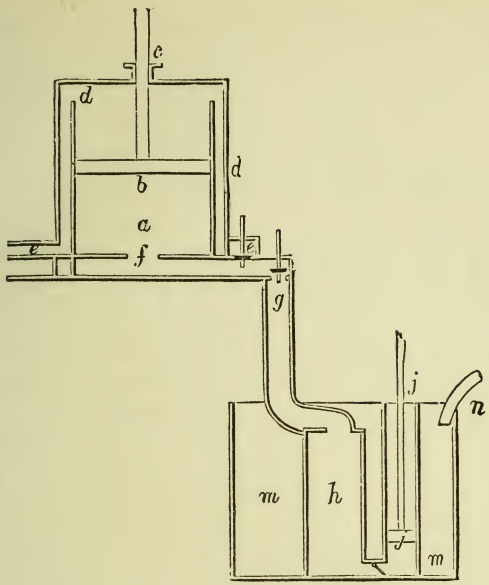

fig. 18.

downwards to the bottom of the cylinder. By the action of the beam the air-pump piston is pulled upwards, and the water withdrawn from the condenser *h*. By the valve mechanism, the valve *g* is shut, and the valve *e* opened; steam is thus introduced beneath the piston, and an equilibrium being established between both sides, the counterpoise at the end of the great beam draws up the piston to the top of the cylinder; the air-pump is thus depressed, and the portion of condensed water lying in the lower part of the barrel passes through the clack or valve in the piston; the mechanism of the valve then shuts the valve *e*, and opens *g*; this taking place on the piston *a* reaching the top of the cylinder, the steam below the piston rushes through the valve *g* to the condenser, and a vacuum being formed as before, the piston is forced by the pressure of the steam on its upper side towards the bottom of the cylinder. To open and shut the valves *e* and *g*, simple mechanism, as follows, was used.

Let *a*, fig. 19, be the spindle of the valve which admits steam to the cylinder, and *b* that of the valve to the condenser; these are connected by a joint to levers moving on the centres *c c*; *h h* is the plug-frame, having studs or projecting pins *o n*; these strike the handles or levers which are fixed on the rod *i i*, and to which the levers *r p* are fixed, actuating the levers *d e*, and lifting or depressing the valves *a b*; *s* is the counterbalance weight which acts as the tumbling-bob in Beighton's valve gearing already noticed. The condenser, in its original form as introduced by Watt, consisted of a series of thin copper pipes communicating with each other, and placed in a cistern filled with cold water: in some instances flat copper pipes were used; the object, in both

cases, being to present as great a surface as possible to the action of the cold water, and to effect a rapid condensation. Notwithstanding many drawbacks attendant upon this plan, it was considered an economical one, inasmuch as a comparatively small power was required to work the pump for withdrawing the air and condensed water. To ensure a quick condensation by this method, it was indispensable to have a large amount of surface exposed to the cold water; this necessitated condensers of such size, that Watt was at last obliged to return to a plan which he had adopted while in Scotland during his trials under Roebuck, namely, to condense the steam by a jet of cold water injected into the condenser. The clumsy outer casing was, after repeated trials, found to be possessed of inconveniences; Watt therefore discarded it, and adopted a plan of intercasing composed of thin sheet-iron, the space being only one inch and a half between it and the cylinder; this space was supplied with steam by a pipe leading from the main steam-pipe. This arrangement involved a radical change in the method of distributing the steam to the cylinder. The details of the new construction may be gathered from the diagram in fig. 20.

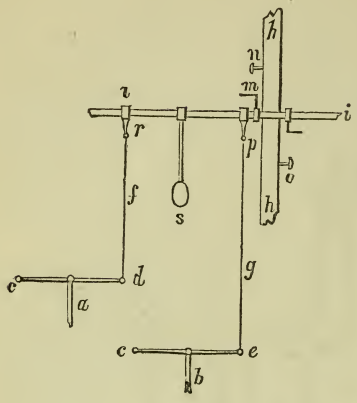

fig. 19.



fig. 20.

Let *a a* be the cylinder, *b b* the outer casing, *c* the piston, *d* the piston-rod, *e* the steam-pipe leading from the boiler, *f* the "steam-valve," *g* the "equilibrium-valve," and *h* the "eduction-valve" in the pipe leading the steam to the equilibrium-valve. Supposing the piston to be at the top of the cylinder, the equilibrium-valve is closed, and the steam-valve *f* and eduction-valve *h* opened; the steam from below the piston rushes through *h* to the condenser, and a vacuum is formed; the steam pressing on the upper side of the piston, it is forced downwards. On reaching the bottom, the steam-valve *f* and eduction-valve *h* are closed, and the equilibrium-valve *g* opened; this allows the steam to gain access to the under side of the piston, as well as to its upper side; an equilibrium of pressure is therefore formed, and the counterpoise pulls the piston to the top, the steam above it flowing through the equilibrium-valve. In this form of engine there is alternately steam and a vacuum on the under side of the piston, the steam being always above the piston.

We now come to notice an important improvement in the working of steam-engines, which the fertile genius of Watt added to the list of his

brilliant inventions: this was working the steam expansively. The patent for the expansive steam-engine was taken out in 1782, but the attention of Watt had been directed to the principle many years before; in 1769 he wrote to Dr. Small, as to a "method of still doubling the effect of steam, and that tolerably easy." Many matters, however, diverted his attention from this important point; and it was not until the above date that he took steps to introduce an engine in which the principle was carried out. To understand its *rationale* is so important to the student of the steam-engine, that we propose to enter into its consideration at some length.

Where steam is admitted to press on the top of a cylinder, during the whole of its descent, the piston will move downwards with an accelerating velocity, which, if not checked, will materially damage the mechanism. An able authority supposes that the value of the expansive principle was made known through the result of some trials made to moderate the velocity of the piston, and lessen the shock as the piston reached the bottom of the cylinder. In Newcomen's engine he supposes this to have been effected by shutting the injection-cock earlier; and in Watt's condensing-engine, by shutting "the steam-valve at such a period of the stroke as would prevent the catch-pins from striking." To shut the steam-communication from the boiler, at a certain part of the stroke of the piston, to allow the steam to expand as the piston descends, constitutes the principle of "working expansively." By the action of the well-known law of pneumatics the pressure of the steam on the piston decreases as the space increases into which the steam has liberty to expand itself; thus if the steam is cut off at one-fourth of its stroke, the pressure will, at the end of the stroke, exert only a force of one-fourth of its original pressure. By thus decreasing the power, a simple method of equalising the tendency to an accelerated motion was attainable. In addition, however, to this advantage, a still greater one resulted from the adoption of the principle, in the economisation of steam, and the consequent saving of fuel. If steam of the temperature of 212° "flows into a cylinder six feet long, until the piston has moved eighteen inches downwards, when this quantity has expanded into double its former volume, and in doing so has pressed the piston to the middle of the cylinder, it will exert a pressure of not more than 7 pounds on each square-inch area of the piston. When the piston has been depressed another eighteen inches, the vapour will have expanded into three times its original bulk, and will then urge the piston downwards with a force of not more than $4\frac{1}{2}$ pounds on each square inch; and when it has reached the bottom of the cylinder, and expanded into four times its original bulk, it will not exert a greater energy than about $3\frac{2}{3}$ pounds on each square inch. If now we calculate the varying power of the steam from the commencement to the termination of its stroke, beginning with a force of 14 pounds, and ending with $3\frac{2}{3}$ pounds, it will have exerted an average pressure of nearly $8\frac{1}{2}$ pounds on each square inch of the piston. But if the vapour had been permitted to flow freely into the cylinder as fast as the piston descended, it would have pressed it with a force of 14 pounds during the entire stroke of the piston. We thus see that one foot and a half of steam, acting expansively, has pressed $8\frac{1}{4}$ pounds through six feet; while six feet of steam, operating with its energy uniform and unimpaired, has only carried 14

pounds through six feet; thus showing that more than one-half of the whole steam has been saved by making it act expansively.

"Although the saving of steam is very considerable by making it work expansively, the power of the engine is reduced; thus, where the steam is cut off at one-fourth of the stroke, while the efficacy of the steam is increased four times—that is, one-fourth the quantity of steam will complete the stroke,—the power is diminished nearly one-half. In engines worked expansively, therefore, the size of cylinder must be increased in proportion to the extent to which the expansive principle is carried. But although the engine is made larger to do the same quantity of work, this work will be done with a less consumption of fuel: this is obvious from the consideration, that at whatever point the steam is cut off, so much steam is saved; and that the steam, although it exerts a gradually decreasing force on the piston, still exerts a power of some extent, which power, whatever may be its amount, is gained without any expenditure of steam. To carry out the system of expansive working most conveniently, it is best to use steam of a pressure considerably higher than that of the atmosphere: unless this pressure is considerable, expansion cannot be carried out to any great extent with advantage; for if steam of a low pressure were used, the ultimate tension would be reduced to a point so nearly approaching that of the vapour in the condenser, that the difference would not suffice to overcome the friction of the piston, and a loss of power would be occasioned by carrying expansion to such an extent. It is clear that in the case of engines which carry expansion very far, a very perfect vacuum in the condenser is more important than it is in other cases." The advantage of applying steam expansively will be seen by an inspection of the following table: if the steam is cut off at one-half of its stroke, the performance of the engine will be multiplied 1·7 times; at

$\frac{1}{3}$	2·1	$\frac{1}{6}$	2·8
$\frac{1}{4}$	2·4	$\frac{1}{7}$	3·0
$\frac{1}{5}$	2·6	$\frac{1}{8}$ . . .	3·2

Watt effected the cutting off of the steam at any desired point by merely altering the position of the tappets or projecting pins in the plug-frame, by which the valves were actuated upon at the proper time. As the motion of the piston was necessarily variable when the expansion principle was adopted, Watt contrived several ingenious mechanical combinations, by which the effect of the engine on the work it had to perform was uniform: he, however, did not apply these to any great extent, as he employed steam a little greater in pressure than that of the atmosphere, cutting off only at one-third or one-fourth, according as circumstances dictated.

The reader desirous of becoming acquainted with these further evidences of Watt's inventive talent, will find several plans figured, by which this uniformity was obtained, in Stuart's *Descriptive and Historical Anecdotes of Steam-Engines*. We proceed to the consideration of more interesting and important matters in connection with the inventions of Watt.

Under the new arrangements it was a matter of importance to ascertain the state of the vacuum in the condenser and cylinder; for on the perfection of this obviously depended the efficiency of the engine. In order to ascertain this, Watt applied a mercurial barometer, connected with the inside of the pipe leading to the condenser; and another barometer

was placed in connection with the boiler. The rise and fall of the mercury in the barometer attached to the condenser indicated the degree of exhaustion which had been made in it; and by the same operation in the barometer attached to the boiler, he had a measure of the pressure of steam acting in the piston: from the data thus obtained, he was able to calculate with considerable precision the amount of power given out by the engine. He afterwards, for this purpose, introduced a highly-ingenious invention which he termed the *indicator;* a diagram of which we now append, in order to show the nature of its operation. A small cylinder *b*, fig. 21, truly bored, is fixed on the cylinder-cover, having connection with its interior: a small piston *c* works in the cylinder *b*, the spindle or rod is continued upwards, its head terminated by a pointer, which is placed along a scale *d*; round the lower part of the spindle of the piston a spiral spring is coiled, one end of which is fixed to the piston, the other to a small bracket. The upper side of the piston is open to the air, the lower is open to the cylinder. The zero point of the scale is so adjusted, that the pointer will point to it when the cylinder is filled with air; and the pressure on both sides of the piston of the indicator is equal. On a vacuum being made in the steam-cylinder, the piston of the indicator is forced downwards; and the spring being thus put in a state of tension, the pointer will indicate the different points in the scale, corresponding to the degree of vacuum in the cylinder. When the cylinder becomes filled with steam, the piston of the indicator rises, and it falls again on the vacuum being made. Thus the power of the engine at any period of its stroke is faithfully transferred to the piston of the indicator, and by this means the power of the engine is estimated. In a future chapter we shall describe the modern indicator, and the means by which it is made to record on paper the working capabilities of the engine to which it is attached.



fig. 21.

We give a diagram in fig. 22, illustrative of the arrangements of Watt's single-acting pumping-engine, as adopted at this period. At the present time the principle of this engine is still the same: the modifications in the details, arising from greater perfection in workmanship, although tending to give an appearance of greater elegance to its form, have not been extended to its principle of action. To such a high state of perfection did Watt bring it, that an eminent authority states that a pumping-engine "made after Watt's primitive type, would, with an equally effectual boiler, and an equal means of clothing and expansion, do about the same amount of duty as the best of the modern construction." We have already detailed the method of action of this engine, so that we deem a further explanation unnecessary; a literal reference to its parts, and a few words as to the method of "working the engine," may, however, be useful. The cylinder is indicated by the letters *a a*, *b* the piston, *d* the piston-rod, attached to the end of the working beam *e e* by a chain passing round the quadrant (see p. 84, fig. 164, treatise on *Mechanics and Mechanism*, in this series, companion volume to the present); *f f* the plug-frame for working the valves by the tappets and levers as shown; *g* the equilibrium-pipe; *h* the condenser; *i* the air-pump; *j* the cold-water cistern; *k* the hot water cistern. In commencing to work the engine, the first operation is expelling

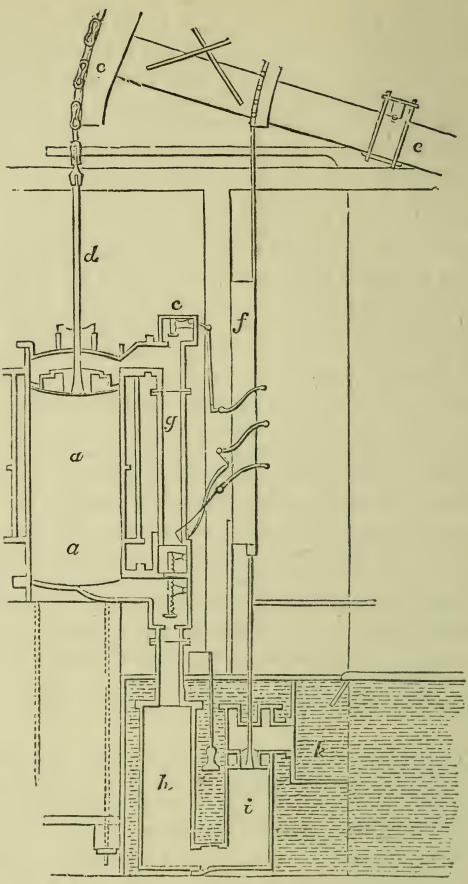

fig. 22.

the air from the interior of the cylinder *a a*: this is effected by relieving the catches of the steam, equilibrium, and eduction valves; these being actuated by weights attached to them, are opened, and steam is thus admitted to all the internal parts, as cylinder and equilibrium-pipe. The first effect of this is to condense the steam by coming in contact with the cold surfaces of the engine; after the cylinder *a a* becomes hot, the steam finally issues through the "snifting valve" placed at the foot either of the condenser or of the air-pump. The valves are then to be shut, and a vacuum is thus formed in the engine. The first stroke of the engine is then made by opening the steam and eduction valves, and opening the injection-cock, so as to admit a jet of water to the condenser: the piston is then forced down into the vacuum by the steam above the piston. The plug-

tree *f f* (fig. 22), in descending, strikes its tappets on the spanner or levers of the eduction and steam valves, shutting these, and opening the equilibrium valve; the steam above the piston rushes through this to the under side of the piston; and an equilibrium being thus established on both sides of the piston, it is drawn up to the top of the cylinder by the action of the counterpoise at the pump end of the beam.

The single-acting engine as here described, although admirably adapted for the purposes for which it was introduced, namely, withdrawing water from coal and other mines, was obviously unfitted for extension to other purposes in which a continuous rotatory motion was desired. By a slight modification of the valves of his engine, Watt was enabled to overcome the difficulty; and in the "double-acting engine," for which we are indebted to his genius, the piston is both raised and depressed by the action of the steam, a vacuum being alternately made above and below the piston. In 1781 he took out a patent for this modification, but his attention had been drawn to it many years before; in fact, while prosecuting his petition for a prolongation of his original patent in 1774, he had exhibited a drawing of the plan to the House of Commons. In this drawing he explained how, after the piston had been pressed by the steam to the bottom of the cylinder, by shutting off the connection between the upper part and the boiler, and opening a communication between it and the under side of the cylinder, the steam by this means could be made to *raise* as well as *depress* the piston into a vacuous space, *which might be made above and below it alternately*. For the introduction of this form of engine, by which the dead weight of the counterpoise was got rid of, the efficacy of the engine as a general motive power vastly increased, and the range of its powers so much extended, we are probably indebted to the rivalry which existed between the firm of Bolton and Watt and other engine-makers, and to the machinations which many of them condescended to employ for the purpose of obtaining a share of the public patronage. Holding such an extensive monopoly, a monopoly not only of legal power, but also, it may be said, of mechanical genius, and of a vast experience such as no others could lay claim to, it need not be wondered at that the firm encountered a vast amount of obloquy and reproach from various interested sources, and that angry feelings and bitter animosity on the part of their rival brethren in the trade existed to a large extent.

It was in connection with the double-acting engine above referred to that Watt introduced those beautiful and philosophical inventions which we are now about to notice.

In the application of the steam-engine to the production of a *continuous* motion, the first step to be taken was to change the reciprocating motion of the piston-rod into a continuous rotatory one. If the reader will turn to pp. 47-49 *Mechanics and Mechanism*, in this series, he will there find a description of a method to effect this purpose by means of what is called a "crank." Although the works of philosophy and mechanics published at periods long anterior to the time of Watt and his contemporaries contained illustrations of this contrivance, and although, moreover, evidence of its use could be seen in almost ever street in the knife-grinder's wheel (see p. 48, fig 72, *Mechanics and Mechanism*), or in many houses in the country in the "housewife's spinning-wheel," the animated rivalry which existed be-

tween several mechanics who claimed the honour of its discovery, as an important appliance of the steam-engine, is very remarkable; the great importance which was thus attached to its exclusive possession may be viewed, therefore, "as one of the many curious illustrations afforded, in the progress of this machine, of the great value of even an apparently trifling improvement."

In the year 1779 a Mr. Matthew Wasbrough, of Bristol, patented a contrivance by which the balanced beam of the atmospheric engine could produce a rotatory motion; and a Mr. John Pickard took out a patent in 1780 for producing rotatory motion, by substituting the crank.

From Mr. Watt's own statement there appears every reason to conclude, that the idea of using the crank had been borrowed from his factory at Soho. But to avoid litigation he took out, in 1781, a patent for another method, namely the "sun-and-planet wheels."

The mechanism of the "sun-and-planet" wheels above alluded to, for the purpose of obtaining continuous rotatory motion from the reciprocating movements of the piston-rod, the reader will find explained in pp. 70-77, fig. 142, *Mechanics and Mechanism.*

The method employed in the single-acting engine for connecting the piston-rod with the end of the working beam was obviously (see p. 84, fig. 164, *Mechanics and Mechanism*) incapable of being applied to the double-acting engine; where the piston was *pushed* up by the pressure of the steam, not *pulled* up by the counterpoise, as in the single-acting engine.



fig. 23.

The mechanism which Watt at first employed, will be understood from an inspection of the diagram in fig. 23. Let *a* be the piston-rod, furnished with a rack at its upper end, working into teeth of a segment fixed on the rod of the working beam; as the piston-rod moved up and down, the teeth actuated those of the segment, and made the beam *c* reciprocate. In working expansively, a small fly-wheel, shown by the dotted lines *d*, was applied to the mechanism; on the centre of this was fixed a small toothed wheel, which was worked by the rack of the piston; the fly moved alternately from side to side as the piston ascended and descended. This contrivance was found possessed of many disadvantages on being carried into practice, especially in large engines, not the least of which was the great noise and jar occasioned by the teeth of the rack and segment engaging as the direction of motion of the piston-rod was changed. Some more elegant contrivance was therefore desiderated, and Watt's genius and mechanical ability no more failed him here than at other and as trying times; and the result of his cogitations was the production of that most beautiful and philosophical mechanism known as the "parallel motion." The principle of this contrivance the reader will find in p. 84, fig. 165, *Mechanics and Mechanism;* and an exemplification of its arrangement as carried out in practice in the diagram fig. 63, p. 44 of the same work. The diagram here given, fig. 24,

illustrates the arrangement of the parallel motion as first applied to the double-acting engine. Let *a a* be the working beam, *f* is the piston-rod, *g* the air-pump rod, *b c d* the links. Other exemplifications of this motion will be found in the diagrams in succeeding chapters of this volume.



fig. 24.

In order to render the double-acting engine as perfect in its arrangements as possible, and independent of the attention of careless workmen, Watt introduced a method by which the engine itself regulated its own motion. This he effected by adopting what is now known as the "governor," a description of which will be found in pp. 87-89, *Mechanics and Mechanism*, also illustrations showing its application to the opening and closing of the valve by which the steam is admited to the engine. In the single-acting engines the throttle-valve was opened and shut by hand, a sufficient uniformity of motion being thus obtained. A view of the valve is given in fig. 25 : *a a* parts of the steam-pipe, joined together by a "flange-

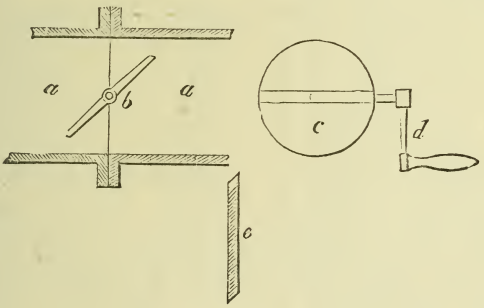

fig. 25.

joint;" at the point of junction a thin disc or valve *b* is placed; the axis of this passes through a stuffing-box in the pipe, and is moved by a handle *d*. When the valve is parallel with the line of pipe, the steam-way is fully open; when brought up with its edges pressing on the interior of the pipe, the steam-way is closed; intermediate positions admit the steam in greater or less proportions. The manner in which the edges of the valve are "chamfered" off to go closely up to the pipe is shown at *e*. The "governor" was not the sole invention of Watt; in the application of it, however, to the steam-engine, it received the impress of his mechanical genius, and was, as it left his hands, in elegance and justness of proportion, and in original adaptation to his peculiar purposes, a very different affair than when used for regulating the sluice of water-mills, for which purpose, under the name of "lift-tenter," it was largely used. It is right, however, to state that,

according to Stuart, a Mr. Clarke of Manchester suggested the adaptation of the "lift-tenter" to the regulation of the motion of the steam-engine.



fig. 26.

The valves attached to the cylinder had to undergo some modification in their application to double-acting engines. The nature of these will be learned from an inspection of the diagram in fig 26. The spindle of the valve *b* is continued upwards, and formed into a small rack; this works into the teeth of a quadrant *e*, moved by the spanner or lever *d*, worked by the plug-frame of the engine; the spindle or tail of the valve *c* works in a small aperture in a bracket below; additional steadiness was obtained by working the rack or slide in a projecting bracket also.

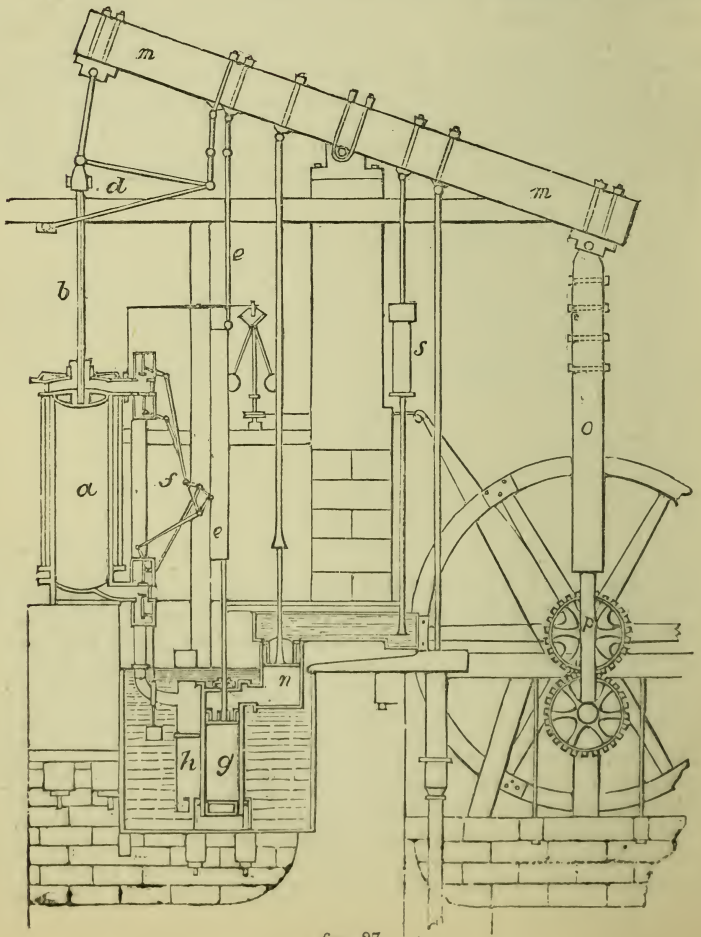

fig. 27.

In fig. 27 we give a diagram illustrative of the arrangements of the double-acting engine as it left his hands: *a* the cylinder, *b* the piston-rod, *d* the parallel motion, *m m* the beam, *o* the connecting-rod, *p* the sun-and-planet wheel giving motion to the fly-wheel, *e* the air-pump rod and plug-frame for moving the valves, *f*, *g* the air-pump, *h* the condenser, *n* the hot-water pump for taking the hot water from the air-pump to the cistern, from which it is pumped by the pump *s*, and delivered to the boiler. Supposing the piston at the top of the cylinder, the action of the engine is as follows: as steam is admitted by the upper valve to the upper side of the piston, it descends, and, at a certain part of its stroke, the tappets in the plug-frame shut the steam-valve, and, as the piston descends, the steam expands: on nearly reaching the bottom of its stroke, the upper exhaust-valve is opened, and a communication made between the upper side of the piston and the condenser; the steam above the piston now rushes to the condenser, and a vacuum is formed. The lower steam-port is now opened, and the steam presses the piston upwards into the vacuum formed above the piston; at the proper period the lower steam-port is closed, and the lower exhaust-valve opened; the steam now rushes from beneath the piston to the condenser, and a vacuum is formed beneath the piston. The movements thus proceed as long as required.

We have next to notice the arrangements which Watt introduced for the purpose of making the boiler supply its own wants; thus adding to the means by which the steam-engine, in almost every respect, was made "automatic." In fig. 28 we give a diagram illustrative of the general

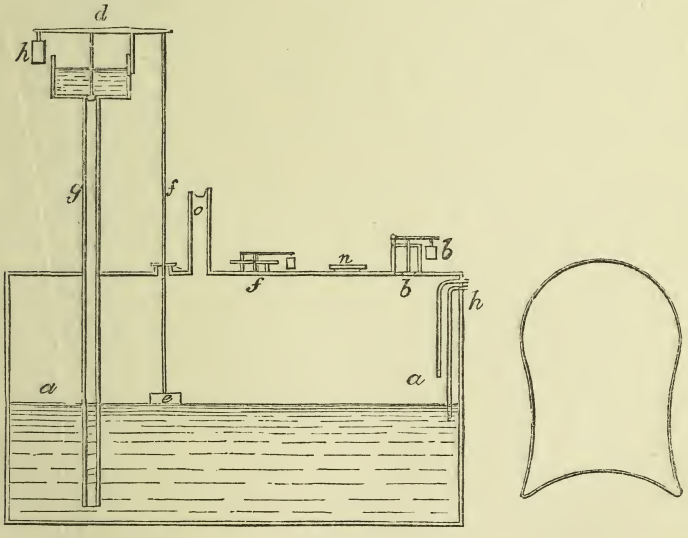

fig. 28.

arrangements of the boiler. Previous to Watt's improved arrangements, the boilers of steam-engines were generally rude and clumsy affairs, ill adapted to raise steam either quickly or economically. This was owing,

no doubt, partly to the low state of the mechanical arts, which precluded any attempt at nice adjustment of parts; and partly to no one studying the subject in all its bearings, in order to arrive at a knowledge of the just proportions necessary to attain the greatest amount of steam at the least expenditure of fuel. The shape, too, was chiefly dependent on caprice or preconceived notions, being confined principally to globular and hemispherical forms, with flat or concave bottoms. The waste of fuel from these boilers at length attracted the attention of practical men, with a view to remedy their defects. Boilers of an oblong form were therefore introduced; and the best of this kind, known as the "wagon" from its shape, owed its introduction to Watt.

And first, as to the important point of supply of water. A vertical pipe *g* was connected with the boiler, and reached to within a few inches of the bottom. This pipe varied in height, according to the pressure of the steam employed in the boiler, allowing some 34 inches for each pound of pressure above that of the atmosphere. The top of this pipe was terminated by a small cistern, supplied with hot water from the hot-water cistern; this cistern was furnished with a valve, opening upwards; the spindle was connected by a jointed lever to the lever *d*; this lever vibrated on the centre attached to the side of the cistern; one end of this lever was weighted with a counterpoise *h*, and the other had a rod attached to it, which descended into the interior of the boiler, passing through a stuffing-box, and having, at its lower end, a stone float *e*. The action of this apparatus was as follows. On the water getting too low the float sank, pulling with it the end of the lever, raising the counterpoise weight and the valve *d*; this allowed the water to descend the pipe to the boiler. As the level of the water rose, the float also rose, and actuating the lever, the valve was let into its seat, thus stopping the flow of water through the pipe. The safety-valve *b b*, instead of being open as in the old engines, was confined in a box, through the cover of which the spindle of the valve worked in the stuffing-box, and the steam which escaped was led by a pipe to the chimney-flue. Another safety-valve was also attached, as at *f*, and was termed "the internal safety-valve:" its office was to admit air to the interior of the boiler, when, by any means, a vacuum was formed in it by the condensation of the steam: to effect this, the valve opened inwards. The gauge-cocks *h h* were used to ascertain the state of the water in the boiler. When one was opened, water was forced through it alone, steam through the other; when this happened, the proportion of water in the boiler was accurately adjusted; if, on the other hand, steam rushed through that cock which should have emitted water, the water was deficient, and *vice versâ*. Access was had to the interior of the boiler, for the purpose of cleaning it out, &c., through the "man-hole door" *n*: this was covered by a plate, and properly secured. The steam for the engine was conveyed by the pipe *o*. In a future chapter, while describing modern appliances of the steam-engine, we shall describe other arrangements and contrivances which the genius of Watt applied to the perfection of the steam-engine.

We have now brought the history of the steam-engine up to the period when Watt ceased making his improvements on it. Such were the perfection of his contrivances and the nicety of his details, that he left little to be done towards its improvement by other hands.

We now hasten to conclude our notice of Watt. After the expiry of the period which parliament had granted him to monopolise the profits of the steam-engine, Watt retired from the firm; and leaving the management of the business to his son and the son of Bolton, retired from "that establishment which his genius had matured, and to which it had given a celebrity as wide as the boundaries of civilisation, to the enjoyment of the fortune which he had accumulated from the meritorious and well-directed exertions of a life distinguished for its activity and usefulness. The patent expired in 1800; and in the house which he occupied while at Soho, he resided till his death, which event occurred on the 23rd of August, 1819. He had suffered some inconvenience through the summer, but was not seriously indisposed till within a few weeks of his death. He then became perfectly aware of the event which was approaching; and, with his usual tranquillity and benevolence of nature, seemed only anxious to point out to the friends around him the many sources of consolation which were afforded by the circumstances under which it was about to take place. He expressed his sincere gratitude to Providence for the length of days with which he had been blessed, and his exemption from most of the infirmities of age; as well as for the calm and cheerful evening of life that he had been permitted to enjoy, after the honourable labours of the day had been concluded. And thus, full of years and honour, in all calmness and tranquillity, he yielded up his soul without a pang or a struggle, and passed from the bosom of his family to that of his God."

In 1804 Arthur Woolfe, of Cambourne in Cornwall, obtained a patent for an improved steam-engine, in which advantage was taken of the expansive properties of steam. He employed steam of considerable pressure to work the piston of a small cylinder; and on its escaping from this, it was applied to the piston of a cylinder much larger in size, and which communicated with a condenser. The properties of steam on which this engine was founded, and the truth of which Woolfe thought he had established, were as follow:—

Previous to his experiments being instituted, a fact had been asserted relative to the expansive property of steam, that with the expansive force of four pounds to the inch, steam was capable of expanding into a space four times its volume, and yet be equal thereafter to the pressure of the atmosphere. His experiments led him to infer, that steam of five pounds to the inch would expand into five times its volume; and that steam of 6, 10, 20 lbs. to the inch, would expand into 6, 10, 20 times its bulk, and still have a pressure equal to the atmosphere, without any additional supply of heat. On this supposed discovery of the expansive property of steam, he proportioned his cylinders: if he adopted steam of six pounds to the inch, his large cylinder was six times the volume of the small one. Experience, however, soon showed the fallacy of this opinion; indeed, Woolfe himself was the first to become aware of it, and in his after-practice he adopted different proportions. The principle, however, of his engine is still in vogue with many of our engineers of high standing, and is being carried out in numerous instances, and with great success; it being beyond a doubt, that, by judicious arrangements, it is calculated to become an economical method of working.

We have now to notice the principle of "*the high-pressure steam-engine,*" and a few historical points connected with it. The distinction between

"low-pressure and condensing" engines, and "high-pressure and non-condensing" engines, is simple enough, and easily remembered. In the former, the steam, after it works the engine, is passed into the condenser, and a vacuum is formed on one side of the piston, it is then sucked down as it were, and by this means a considerable degree of power is obtained; in the latter, the steam, after working the piston, is passed at once to the atmosphere. An eminent authority thus distinguishes between the two, and draws a comparison between them: "All locomotive engines are of the high-pressure variety; and generally all engines are made on the high-pressure plan where the carriage of condensing water would be inconvenient, as the first cost of the machine becomes a point of more importance than an increased consumption of fuel. High-pressure engines are, *cæteris paribus*, necesarily more expensive in fuel than low-pressure engines, as they occasion the loss of the power derivable from a vacuum; and as the quantity of heat in the same *weight* of steam is nearly the same at all pressures, there is no counteracting source of economy to compensate for this deduction. The use of high-pressure engines in circumstances in which the low-pressure engine is applicable, is not to be commended; and the high-pressure engine is rarely employed for other purposes than locomotion on railways, except in the case of very small engines required for some temporary or trivial purposes. . . . . Where high-pressure steam is employed, it is expedient to make the pressure considerable, as the deduction to be made for the pressure of the atmosphere is less in proportion with a high than with a moderate pressure. Some locomotive engines are worked as high as 90 lbs. to the square inch." Notwithstanding the objections urged against the use of high-pressure engines, they are used in great numbers, and for an almost infinite variety of purposes in connection with our arts and manufactures. Although with steam of high pressure considerable danger exists in the liability to explosion of the boilers, still, from the general simplicity of detail, and the consequent cheapness in construction, and their extreme portability, we need not wonder at their extended use.

The merit of the introduction of the first high-pressure steam-engine belongs to Leupold, a native of Plunitz, near Zwickau. He described it in his celebrated work entitled *Theatrum Machinarum Hydraulicarum*, published in 1727. With a modesty which formed not the least striking characteristic of this amiable man, he attributed the invention to Papin, because this individual furnished the idea of using the expansive force of steam to raise water, and from his having taken the four-way cock which Papin used in his air-engine. The engine as constructed by Leupold is remarkable for the simplicity of its details; a diagram showing the method of its operation is given in fig. 29: where *a a* is part of the boiler, on which a four-way cock *b* is placed; *c* and *d* are two pipes communicating with the bottom of the two cylinders, in which the pistons *e* and *f* work; these are placed alternately,—that is, when the piston *f* is at the top, *e* is at the bottom; they are both loaded with lead, to act as counterpoises, and bring down the ends of the beams *g* and *h* to which they are attached; the other ends of these beams have pump-rods attached. Suppose the piston *f* to be at the top of the cylinder, the four-way cock is turned one quarter round; this opens a communication between the cylinder in which *f* works and the open air, and between the boiler and the cylinder in which *e* works;

the steam in *f* passing into the air, the pressure on the piston is relieved, and it descends; the steam, however, acting on the piston of the cylinder *e*, presses it to the top: there have been thus two strokes of the pump-rods, one up by the cylinder piston *f*, the other down by *e*. On *f* reaching the bottom of its cylinder, and *e* the top, the four-way cock is turned back again a fourth; the communication between the interior of cylinder *e* and the atmosphere is thus opened, and between the boiler and cylinder *f*; a down stroke of *e* is thus made, and an up one of *f*; and so on alternately.

By an inspection of the specification of Watt's steam-engine, already given, it will be seen that he contemplated the use of high-pressure steam; he, however, had a decided objection to its use, and consequently did not further prosecute his ideas. In 1802 Messrs. Trevethick and Vivian, of

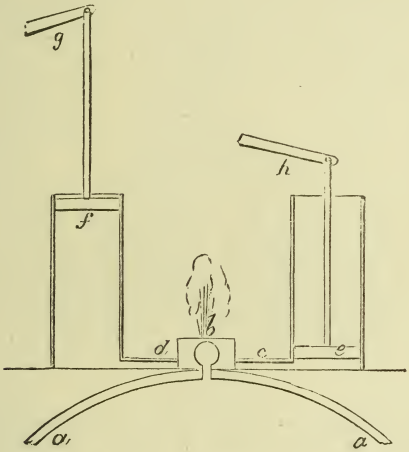

fig. 29.

Cambourne in Cornwall, took out a patent for a high-pressure engine, which was used to propel a carriage or wagon: the arrangements of this engine are particularly ingenious, and some of the details modified, form features in many of the modern high-pressure engines. In fig. 30, the boiler *a a* is of a circular form, to resist the high pressure of the steam; to prevent the loss of heat by radiation, it is enclosed in a case filled with clay; the lower part of the case forms the fire-place, and the flame and heated air circulates round the boiler at its upper part, finally issuing into the chimney; *c* the cylinder, the lower part of which is within the boiler; *d* the piston; *g* the piston-rod, passing through a stuffing-box in the cylinder-cover, and having a connecting-rod *h* attached to the crank *i*; by this arrangement the fly-wheel revolves. The piston-rod works between guides, as shown in the diagram. A worm or snail wheel *j* in its revolution acts on the small wheel *k*, which is fastened on the end of the lever *l*, furnished with a counterpoise *n*; steam is admitted to the cylinder by the passage *e* through the valve *f*; by moving this cock or valve a quarter-turn, the steam is admitted either to the upper or under side of the cylinder. By the falling of the wheel *k*, by the action of the cam or snail-wheel *j*, the lever is depressed and the weight *n* rises; this acts on a lever *m*, and by

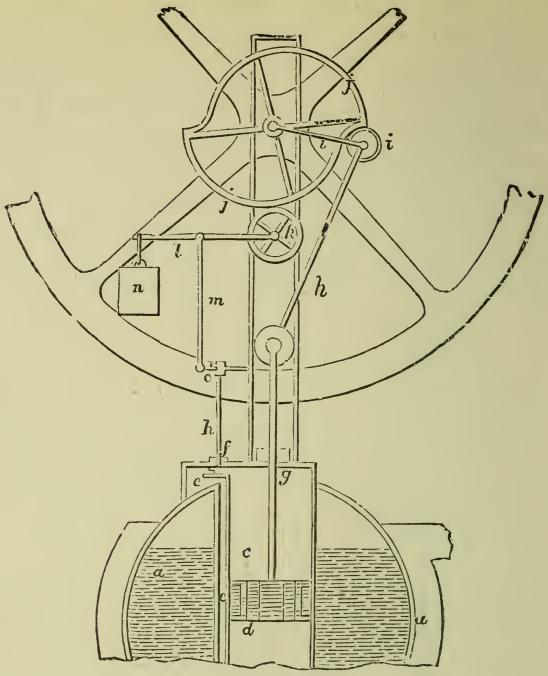

fig. 30.

making its lower end move outwards, pulls the horizontal lever *o* through a part of its radius; and through the medium of the lever or spindle *h* the valve is moved round one quarter. A click or ratchet is placed on the top of the spindle *h*, which, coiling up during the time that the lever *o* is moving outwards, does not move the cock *f*; but when the extremity of the worm-wheel *j* touches the wheel *k*, which will happen when the piston is near the top of its stroke, the wheel *k* goes into the cavity of the cam-wheel *j*; and the extremity of *m* returning, the lever *o* turns the cock *f* a quarter round; this admits the steam to the upper side of the piston, and allows that beneath it to pass into the atmosphere.

We now proceed, as a conclusion to the present division of our work, to present examples of steam-engines in use at the present time; reserving for another division descriptions of the various details of modern engine work; as boilers, safety-valves, feed-apparatus, cylinder valves, valve gear-pistons—packed and metallic, &c. &c.

In fig. 31 we give a drawing of a large pumping engine erected at Walbottle Colliery, Northumberland, by the celebrated engineering firm of Messrs. Hawthorn of Newcastle. The principal feature in the arrangement is the economy and simplicity of working the forcing or plunger pump with two lifting-pumps direct from the beam; the engine, being a double-acting condensing one on the expansive principle, there is therefore no counterpoise on the left of the beam, the engine being equally loaded

at the in-door and out-door stroke. The dimensions of the engine are as follows: the cylinder *a a* is 77 inches in diameter, stroke 10 feet; the stroke of the beam *m m* 17½ feet and 14 feet—31½ total: length of stroke of pumps *n n* 8 feet, diameter of the plunger or ram 28¾ inches; diameter of lifting-pumps 16⅞ inches. The pumps deliver from 1,100 to 1,500 gallons of water per minute, according as the strokes are 5 or 7 per minute; *b b* the

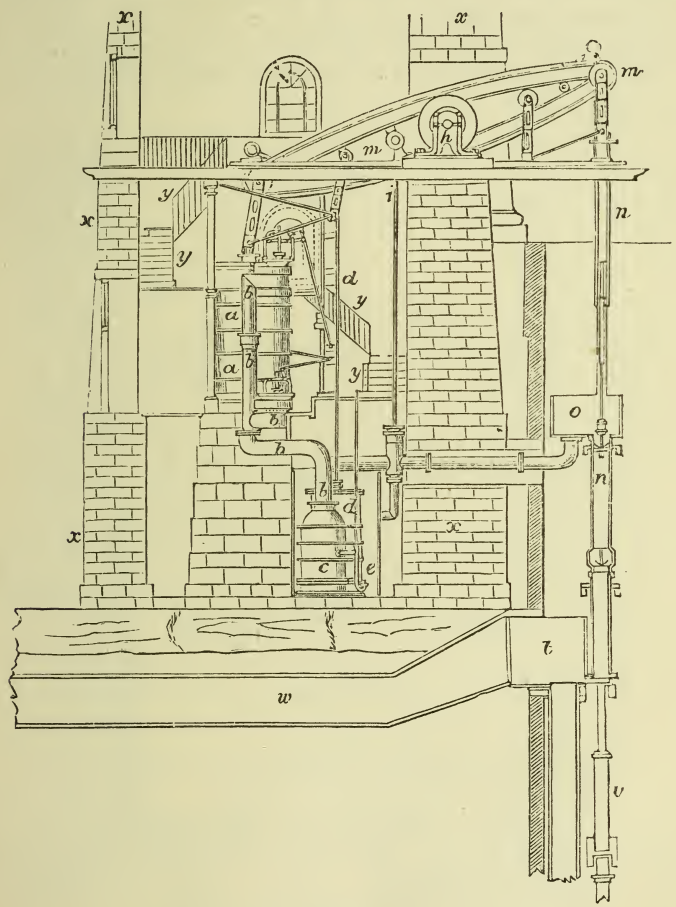

Fig. 31.

valves and steam-pipe leading to condenser *c*; *e* the injection-pipe and handle; *d d* the air-pump and lever; *n* the centre plummet-block, on which the great beam *m m* vibrates; *y y* the stairs for gaining access to the upper-story of the building *x x*. The water is led off to a neighbouring valley by the drift *t w*.

In fig 32 we give an elevation of a double-acting condensing engine, to which M'Naught's patent has been applied; without the small cylinder

a a the arrangement of a double-acting condensing engine, as applied to manufacturing purposes, will be easily understood from an inspection of the figure; *s s*, the spring beam, on which the plummet-block *t* is fixed; *u u*, the working beam (or *walking* beam, as it is termed by working engineers); *v*, the connecting-rod for turning the crank and fly-wheel 2 2; *y* the central pillar, *b b* the cylinder, *k* the piston-rod, *w* the parallel motion; 1 1 the air-pump rod, 2 2 the hot-water pump; the valves in valve-casing, *z*, are worked by the eccentric-rod and levers, *d d e*. Where the power of the engine originally fitted up becomes too small for the increased work to be done, it is increased by the very judicious arrange-

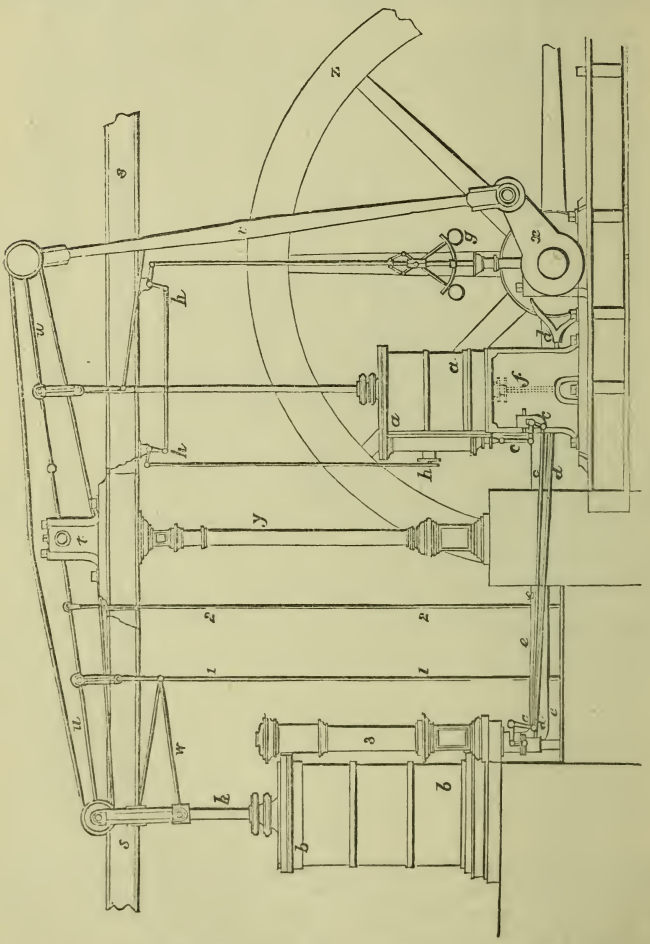

fig. 32.

ment as patented by Mr. M'Naught of Glasgow and Manchester, and the principle of which is also shown in the diagram in fig 32. The steam is admitted at high-pressure to a small cylinder *a a*, fitted on the side of the beam next to the connecting-rod, and the parallel motion of which is

attached to the spring beam, in the same way as in the large or original cylinder *b b*; after working the piston of the high-pressure cylinder *a a*, the steam passes by the pipe *e* to the low-pressure cylinder *b b*, from which it finally passes to the condenser. The valves of the high-pressure cylinder are worked by levers *c c*, which are attached to the lever which works the valves of the large cylinder; by this arrangement the valve-gear of both the cylinders is connected; and when that of the low-pressure cylinder is disconnected, by throwing the main eccentric out of gear, both sets of valves are disengaged, and can be worked with the same handle or lever simultaneously. The cold-water pump is proposed to be worked, either by a continuation of the piston-rod of the high-pressure cylinder below the cylinder, as at *f*, or by a cross-head to the piston-rod of *a a*, furnished with side-rods attached to the ends of a cross-bar beneath the cylinder. To this bar a pump or pumps may be attached. The steam acts upon the top of one piston and the bottom of another alternately; by this means much of the strain and shock is taken off the central journal of the beam *w w*; and by consequence, from the entablature-pillar and the walls. By this

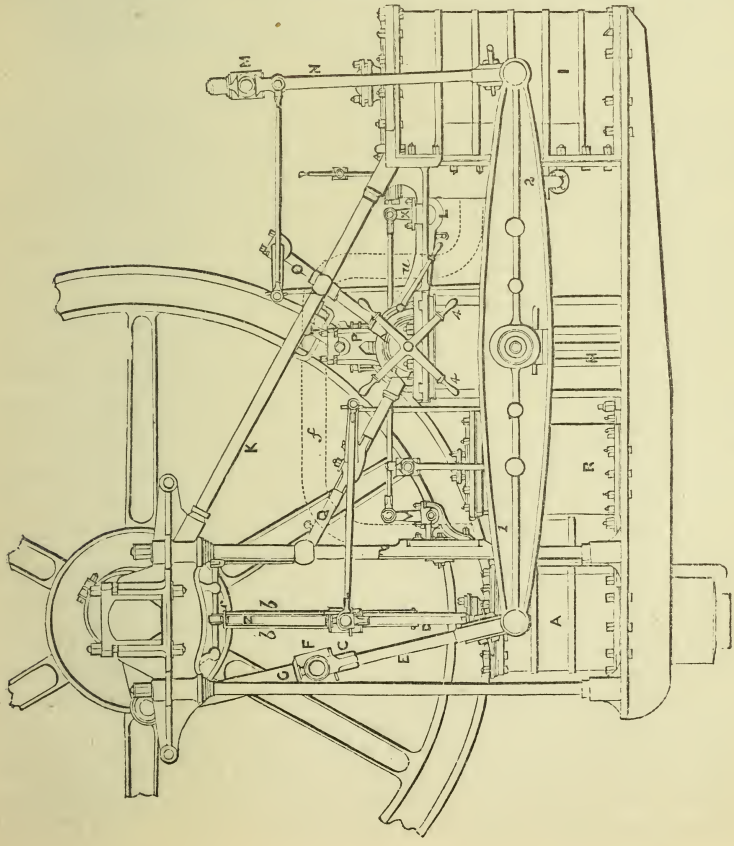

Fig. 33.

arrangement of double-cylinder engines much fuel is saved, extending in some instances to 40 per cent.; increased steadiness of movement is also insured. The arrangement is also adapted to marine-engines, a class of engine which possesses many advantages, making it highly eligible for manufacturing purposes. The diagram in fig. 33 illustrates a form of marine-engine adapted for a factory, to which M'Naught's principle is applied. As this example presents many mechanical movements of interest to the student, we shall append a rather full description of its details. Fig. 33 is the side elevation, and fig. 34 the plan. The high-pressure

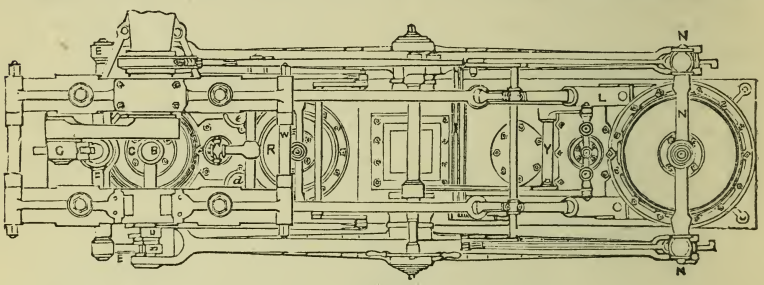

fig. 34.

cylinder A is 22 inches diameter, and 4 feet stroke; it is placed between the four wrought-iron columns supporting the crank-shaft. The system of connections for the crank is on the plan invented by Mr. David Napier.

The *low-pressure* cylinder I, which is worked by the exhaust steam from the cylinder A, is bolted to the sole-plate at the opposite end of the side-levers 1, 2. It is 33 inches diameter and 4 feet stroke. The crank-shaft bearing is stayed by two wrought-iron stays K, cottered into eyes cast on the inner ends of the crank-framing, and attached to the upper inner-edge of the cylinder by two eyes cast on the ends of frames L, attached at their extremities to the hot-well and the cylinder. The body of each of the pistons consists of a single hollow casting with four radiating strengthening feathers. The packing is composed of two cast-iron rings, each with two cuts, and actuated by a series of H springs placed between the body of the piston and the interior surface of the rings. The cross-head M is attached to the top of the piston-rod by a central eye in the usual manner, and is adjustable by a nut bearing on the upper surface of the eye; from the ends of this cross-head the wrought-iron side-rods N N, pass down to the joint studs in the double eyes of the side-levers, where they are attached in the usual manner (see *Mechanics and Mechanism*). The parallelism of the piston-rod is maintained by the arrangement of radius bars, detailed in the division of this work *Marine Engines*. The parallel motion-shaft of the low-pressure cylinder I is carried by a pair of short pillars O O, passing through round eyes forged in the diagonal stays K, and resting at their lower extremities upon the upper sides of the semi-circular portions of the valve rocking-shaft pedestals P. The parallel motion-shaft of the small cylinder is carried by bearings forged on the upper sides of the diagonal stays Q, which are fitted with round eyes at one end for passing upon the wrought-iron pillars of the crank-framing, where they are supported by collars; the contrary ends are bolted to the pedestals

P, upon which eyes are cast for the purpose. The air-pump R is worked by short side-rods attached to studs on the inner sides of the side-levers, the cross-head being guided by light wrought-iron guide-rods bolted to the cover of the pump, and passing through eyes purposely formed in the cross-head; their upper ends being fixed in the short diagonal stays Q. The condenser is of a rectangular section, and, together with the steam-passage leading from the low-pressure cylinder, is cast in one piece with the sole-plate. An air-vessel is fitted on its top, and on each side is bolted a pedestal P for the rocking-shaft of the valve-motion. The valves are of the usual single-cup species, similar to those used in locomotive engines; they are kept up to the valve-face by slight bent springs attached to the interior of the steam-chests. They are worked by an eccentric on the crank-shaft, the rod of which is fitted with a plain gab and guard at the extremity, for the pin of the rocking lever T; the detaching apparatus for throwing it out of gear being worked by a hand-lever on the end of a transverse shaft passing across the engine. The rocking lever T is double-ended, the eye at the lower end being jointed by a connecting link to a second lever V, placed on the rocking-shaft W, carrying a lever for working the valve of the high-pressure cylinder. The main rocking-shaft passes across the engine from front to back, and carries a short-toothed segment, placed just within the front pedestal. Near the end of this segment is placed a stud-pin, from which a lever-rod passes to the lever X, fast on the rocking-shaft Y; working on bearings in the frames L, and carrying a lever at each end for giving motion to the cross-head of the low-pressure valve-spindle, which is guided by vertical rods, in the same manner as the air-pump bucket. By this arrangement the weight of one valve balances the other. The governor is situated behind the high-pressure cylinder, its spindle Z being supported in a footstep on the engine-house floor, and steadied at its upper end by two wrought-iron stays attached to the crank-shaft framing. The sliding-ring worked by the governor levers is jointed to two light links *b b*, passing up to a lever on the shafts *c*; whence, by a series of levers and connecting links, the motion is communicated to the throttle-valve, which is placed in the steam-pipe in front of the valve-chest of the cylinder A. The steam-pipe from the boiler, which is not shown in the drawings, conducts the steam by the thoroughfare *d*, seen in the ground-plan; a corresponding passage *c* conveys the exhaust steam by the dotted copper pipe *f*, to the front of the valve-chest of the low-pressure cylinder.

The hand-gear for the valves consists of a quadruple lever, fast on a short spindle carried in bearings on the top of the condenser; on the inner end of this spindle is a small pinion, working into the toothed segment, previously mentioned as being fixed on the main valve rocking-shaft. By this means, when the eccentric-rod is thrown out of gear with the rocking-lever by handle W, the valves may be worked with great care by the quadruple-lever 4, 4. The engine is bolted down to a foundation of masonry by twelve bolts—four at the high-pressure cylinder, four at the main centre, and four at the low-pressure cylinder. Two cast-iron beams of the double *z* section, 8 inches wide and 6 deep, are laid along the bottom of the masonry in a longitudinal direction, and through these the holding-down bolts pass; thus binding the whole foundation together, and giving

the sole-plates a firm hold. Two transverse beams of similar section are laid in the masonry, above the longitudinal ones, their ends being laid in the bottom of the two side walls of the engine-house. By adopting this plan a considerable saving in the depth of masonry is effected, and a most substantial base is formed. The action of the engine is precisely similar to the ordinary Woolfe double-cylinder engine; but the relative position

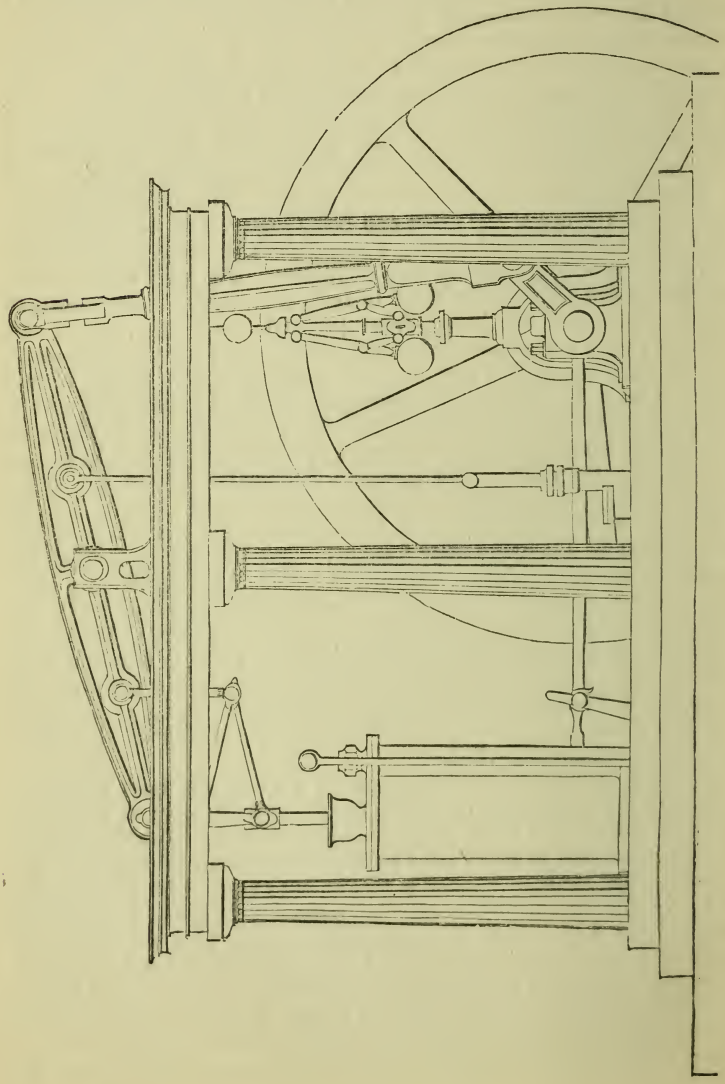

fig. 35.

of the two cylinders effects, to a very great extent, the economy and regularity of the expansive action of the steam, which may be here carried out to the utmost extent. The high-pressure steam, acting at one end of the side-levers, is always balanced by that of the low-pressure and the vacuum in the larger cylinder; so that the combined power of the two is conveyed to the crank-pin as if from a direct-acting cylinder. The example we have given is estimated at 60-horse power; but with the full pressure of 35 lbs. it can be worked up to 120. It was manufactured by Messrs. J. and G. Thompson, of the Clyde Bank Foundry, for the flax-mills at Prinlaws; for the drawings and description we are indebted to the courtesy of the editors of the *Practical Mechanics' Journal*, Messrs. Johnstone.

In fig. 35 we give a side elevation of a high-pressure steam-engine of neat design.

In fig. 36 we give an elevation of a high-pressure engine of the kind known as "crank-over-head:" *a* is the cylinder, *c* the supply-pipe from the boiler, *b* the exhaust; the piston-rod is furnished with a cross-head *d*,

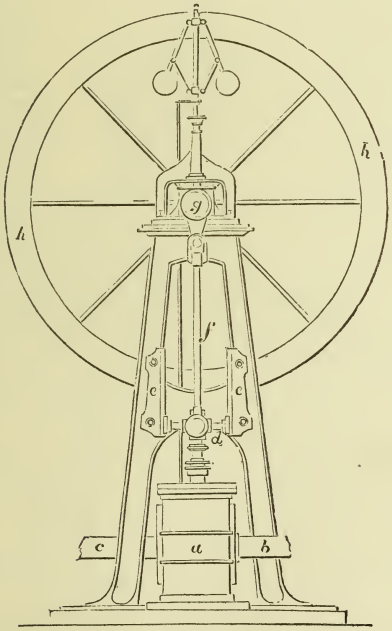

fig. 36.

which slides in the parallel slides *e e*; *f* the connecting-rod joined to the crank *g*, *h h* the fly-wheel; motion is communicated to the governor spindle from the fly-wheel shaft; the governor acts on a throttle-valve on the pipe *c*; the valves are worked by an eccentric placed in the fly-wheel shaft.

In fig. 37 we present an elevation of the form of high-pressure engine known as the "table engine;" in this form the fly-wheel shaft is beneath the table or platform on which the cylinder stands; the shaft is provided with two cranks, side-rods being connected with them, and attached at the

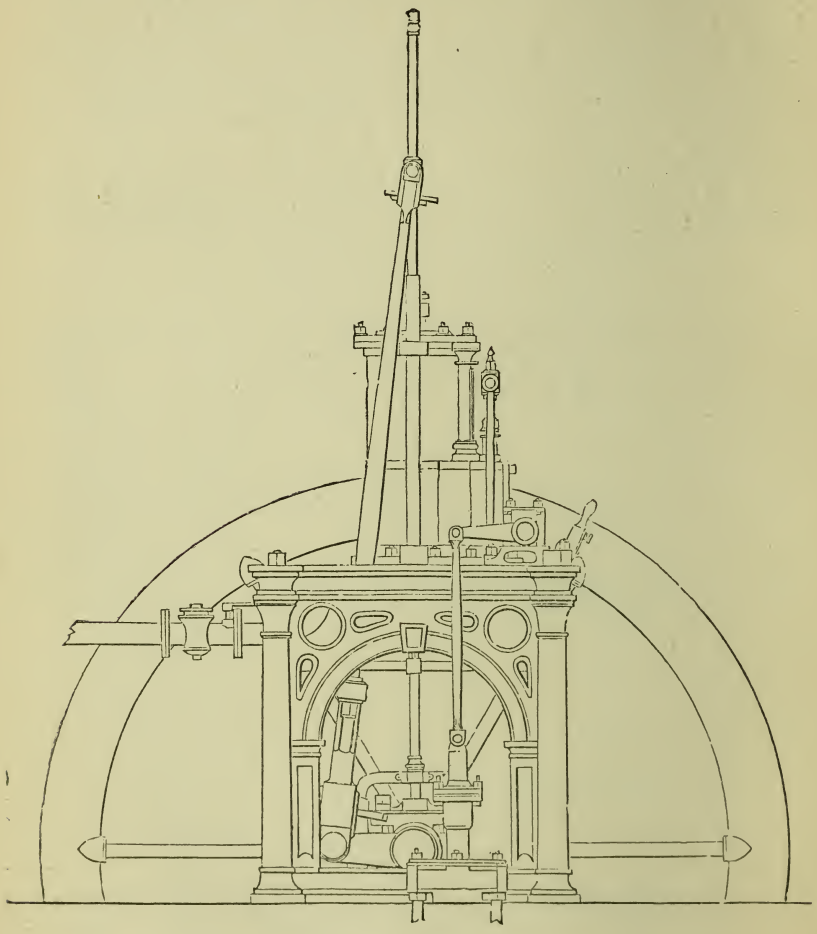

fig. 37.

upper ends to the ends of a cross-head fixed on the piston-rod end; the ends of the cross-head move in parallel guides. (See *Mechanics and Mechanism.*)

In fig. 38 we give a side elevation of a horizontal engine, in which the

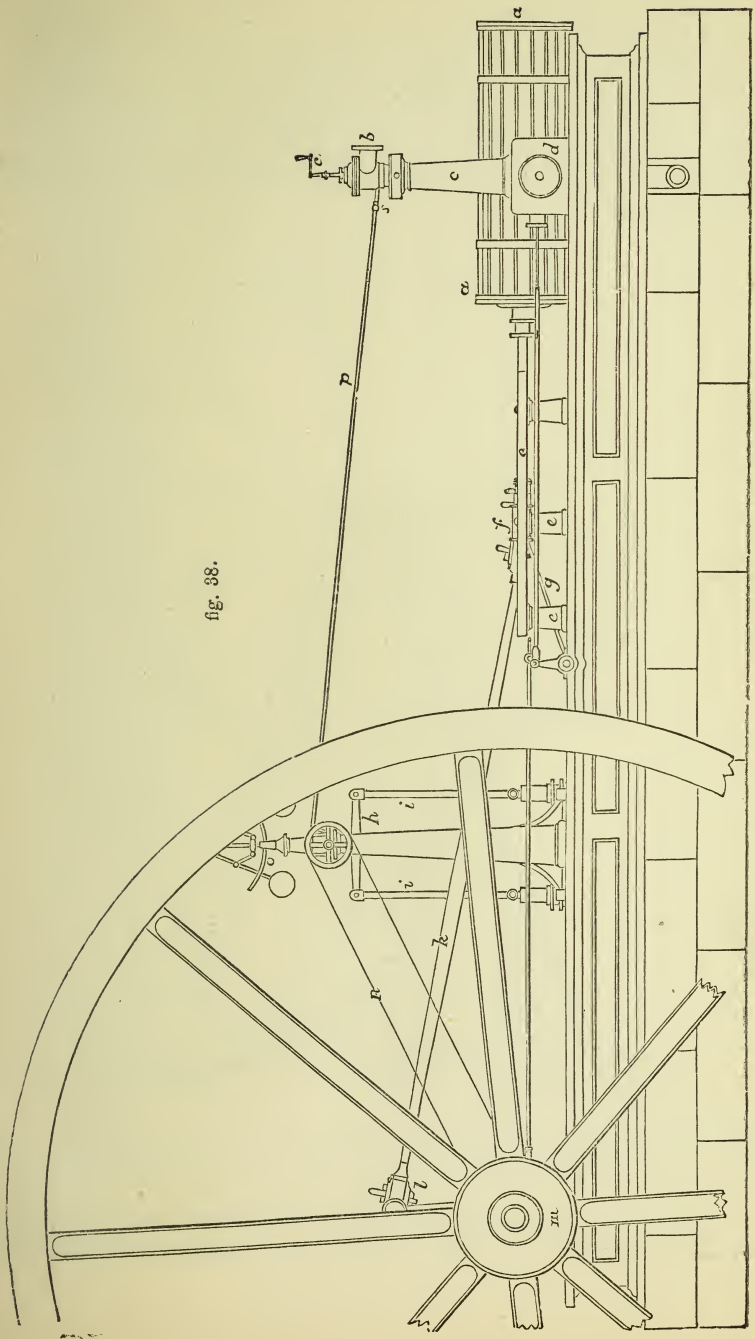

fig. 38.

cylinder *a* is placed horizontally; *b c c* the steam-pipe, *d* the valve casing, *e e* the piston-guide, *f* the piston-rod connected with the connecting-rod *k*; the crank is at *l*, fly-wheel at *m*; the governor *o* is moved by the cord *n*, with a small pair of bevil-wheels, *p* the rod for communicating with the throttle-valve at *s*; the pumps *i i* are worked by the oscillating lever *n*, the stud of the lever is lengthened, and a lever is connected with it, which extends downwards, and is moved backwards and forwards by the rod *g*, which is connected to it at its lower end, the rod *g* being connected with the piston-rod stud.

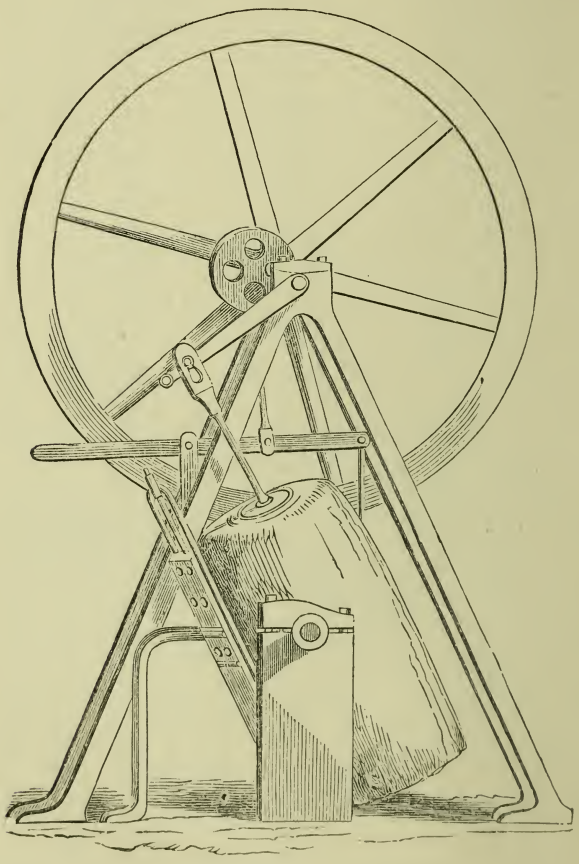

fig. 39.

We now present examples of a form of engine in which the parts are much simplified; this variety is termed the "oscillating engine." The

cylinder vibrates on an axis either at top or bottom; at top if vibrating in a vertical plane, but at bottom if horizontally; by this arrangement the rectilinear motion of the piston is made to accommodate itself to the circular motion of the crank, the piston-rod stuffing-box moving through the arc of a circle; this enables the piston-rod to be connected at once with the crank, without the intervention of a connecting-rod; thus securing the advantages of direct action. The valves are worked in the ordinary way by eccentrics and levers; but in some examples the action of the cylinder

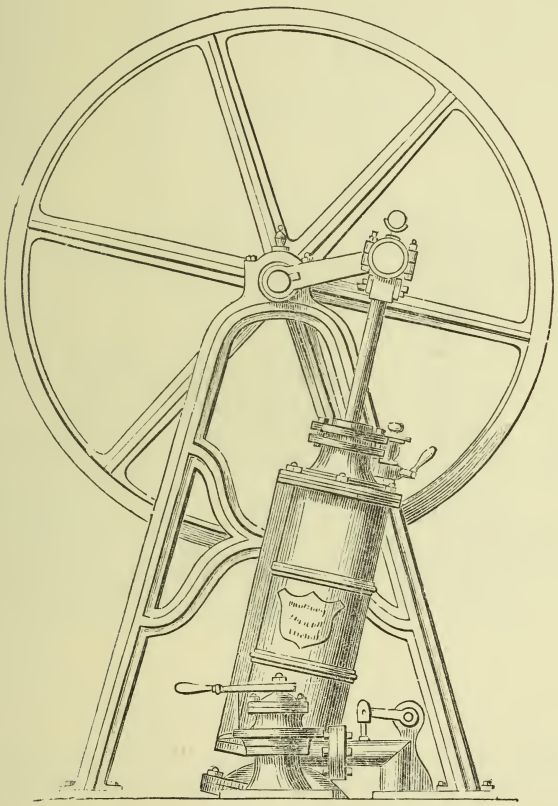

fig. 40.

itself is made to open and shut them; thus simplifying the arrangements to a great degree. It is interesting to note that Watt constructed a model of this form of engine. This is shown in fig. 39.

The cylinder in this model, which was exhibited in the Great Exhibition, is cased with wood.

In fig. 40 we give an elevation of an oscillating engine by Evans, exhibited in the Crystal Palace.

Portable steam-engines are now much used for a variety of purposes, and in agricultural operations. In fig. 41 we give a view of Clayton and

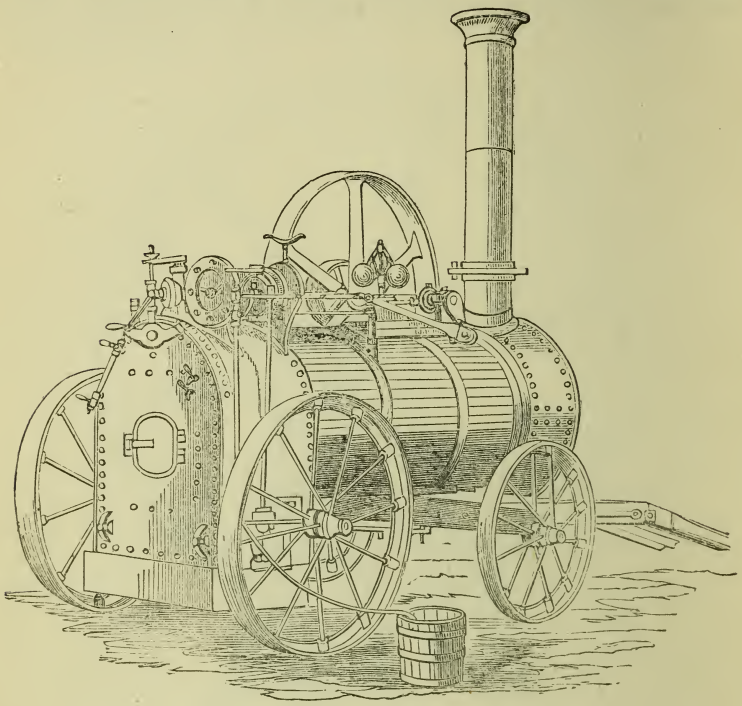

fig. 41.

Shuttleworth's agricultural portable engine. In fig. 42 we give an elevation of Gough's portable engine, for pumping water from quarries and excavations.

In fig. 157, p. 81, *Mechanics and Mechanism*, we give the side elevation of a steam-pumping engine, applicable as a portable steam-engine for agricultural purposes by disconnecting the pump.

In another chapter we propose to describe the rotatory engine, and other varieties, as the disc-engine, the arrangements of which present peculiarities different from those which we have already described. In the meantime we proceed to describe the various details of the cylinder engines.

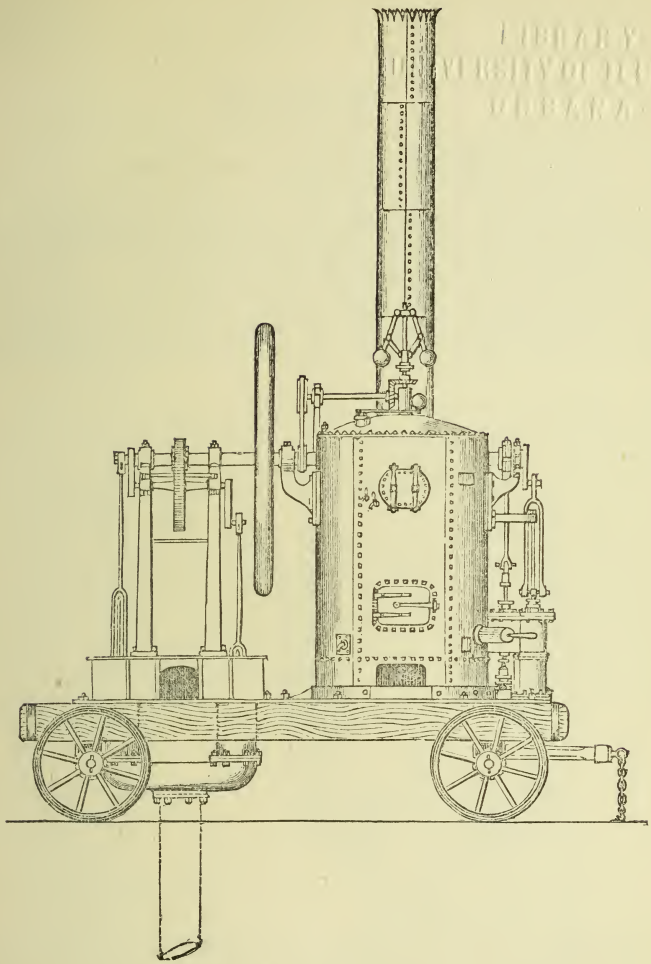

fig. 42.

CHAPTER III.

DETAILS OF BOILERS AND ENGINES.

BEFORE we describe the appliances of boilers as now adopted in modern practice, we propose to give a few sketches, illustrative of the varieties of boilers which have been introduced from time to time.

In the sketch given in fig. 17 of Smeaton's Chacewater engine, the form of boiler will be seen. Smeaton paid great attention to the construction of boilers; and a favourite form of his is known as the "hay-stack,"

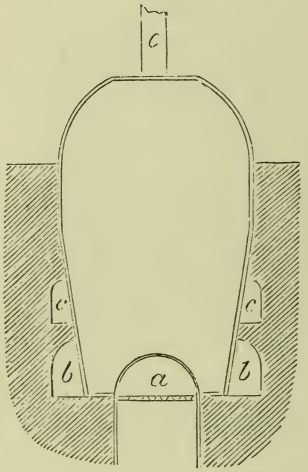

fig. 43.



fig. 44.

or "hay-cock" boiler. A diagram, showing its form, is given in fig. 43; *a* is the fire-place, *c c* the upper flues, *b b* the lower ditto; the steam was taken from the upper-part *d* through the pipe *e*. This boiler was formed of plates of cast-iron, joined together with flanges and bolts. The cylindrical boiler, as in fig. 44, is constructed with two circular or semi-spherical ends, as at *a a*: the ends of this form of boiler are in America generally made flat. In some instances an internal circular flue, as *a*, fig. 45, is provided in this form of boiler; the flue extends from end to end, and the heated air and smoke, after passing from the fire-place, goes through this flue in its passage to the chimney. This form of cylindrical boiler, called the "Trevethick," from its introduction being attributed to that engineer, is generally used for high-pressure engines. When properly constructed it is very strong, and capable of resisting a very high degree of pressure.

We have already figured the form of boiler known as the "wagon," adopted by Watt. A boiler very generally used for condensing engines, and known as the "Cornish," consists of a cylindrical boiler, having a



fig. 45.



fig. 46.

large internal circular flue, in which the fire-place is situated. The introduction of this form of boiler "has effected great improvements in the economy of fuel as well as the strength of the boiler." This form is shown in the sectional diagram in fig. 46, where *a a* is the boiler, *b* the internal flue, *c* the fire-bars.

A form of boiler, considered by competent authorities as a very effective and economical kind, is that known as the double-flued and double-furnaced boiler, a sectional diagram of which is given in fig. 47; *a a* the flues, *b b* the furnaces, *c c* the boiler. This is now in general use. "It consists," says Mr. Fairbairn, of Manchester, "of the cylindrical form, varying from five to seven feet in diameter, with two flues, which extend the whole length of the boiler; they are perfectly cylindrical, and of sufficient magnitude to admit a furnace in each. This boiler is the



fig. 47.



fig. 48.

simplest, and probably the most effective, that has yet been constructed. It presents a large flue-surface as the recipient of heat; and the double flues, when riveted to the flat ends, add greatly to the security and strength of these parts. It moreover admits of the new process of alternate firing, so highly conducive to perfect combustion, and the prevention of the nuisance of smoke."

The boiler known as the "French," as having first been introduced into practice in France, and which is much used in Lancashire, is figured in fig. 48: *a* is the cylindrical boiler; *c c*, two tubes, stretch longitudinally

below the boiler, and receive their supply of water by the vertical tubes *b b*, a brick arch *f* is thrown over, between the tubes *c c*; by this arrangement the flame and heated air from the furnace pass along the under side of arch *f* and tubes *c c*, returning to the chimney along the space between the bottom of tubular boiler *a a* and upper side of arch *f*. This form of boiler is highly efficient; and the principle of making the flame and heated air impinge upon the outside of tubes containing water, instead of



fig. 49.



fig. 50.



fig. 51.

passing through the inside of tubes surrounded with water, is considered by some to be possessed of such superior advantages, as to be likely soon to supersede all other arrangements. This principle is carried out in a very effective manner by Messrs. Galloway in their patent boilers. Fig. 50 is a sectional diagram across the boiler; fig. 49 part longitudinal section, and fig. 51 part plan. The peculiarity consists in arranging a series of vertical conical tubes *a a*, within the central flue, in a zig-zag form, connecting the upper and lower part of the boiler *c c*. The boiler is of the double-furnace kind, firing each furnace alternately.

The great efficiency of the locomotive boiler, in which the heated air passes through the inside of tubes which are surrounded externally with water, has directed the attention of engineers to the construction of boilers for stationary engines on this principle. Fig. 52 is a longitudinal section of Messrs. Gordon's multitubular boiler, and fig. 53 a transverse section. This form of boiler requires no brick-setting; but after being attached to the engine and to the chimney-flue, can be set at work. These boilers have double furnaces, which are fired alternately: *d* is the fire-door, *f f* the combustion-chamber, *e e* the fire-bars, *g* the fire-bridge, *a a* the tubes, *c* the pipe from which to withdraw the sediment, *b* the man-hole door, *m m* the stays to strengthen the boiler, *h h* the standard for supporting the boiler.

The forms of boilers we have here given are such as are generally adopted for land or stationary engines; those for marine being arranged somewhat differently. It is impossible, under this division, to notice even a tithe of the arrangements introduced; we must content ourselves, therefore, with a few general notes.

The form of boiler originally introduced into steam-boats was merely a land-boiler, with large internal flues, like the Cornish boiler; the difference being, that in the latter the boiler was encased in brick-work, while in the former the external casing was of iron, leaving a space between, in which water was placed. The plan of the locomotive tubular boiler was next introduced, and with marked success. The next improvement was turning the tubes over the furnaces, as in fig. 54: *h* the fire-door, *b* the fire-bars, *f f* the tubes passing through the boiler to the funnel-flue *g*. An exceedingly compact form of boiler is now rather extensively used. It is known

as the "vertical tubular." In form, it is somewhat like an ordinary cylindrical boiler set on end; the fire-place is near the lower end, and is completely surrounded with water. From the upper part of the fire-place a number of vertical tubes are led. These pass upwards through the

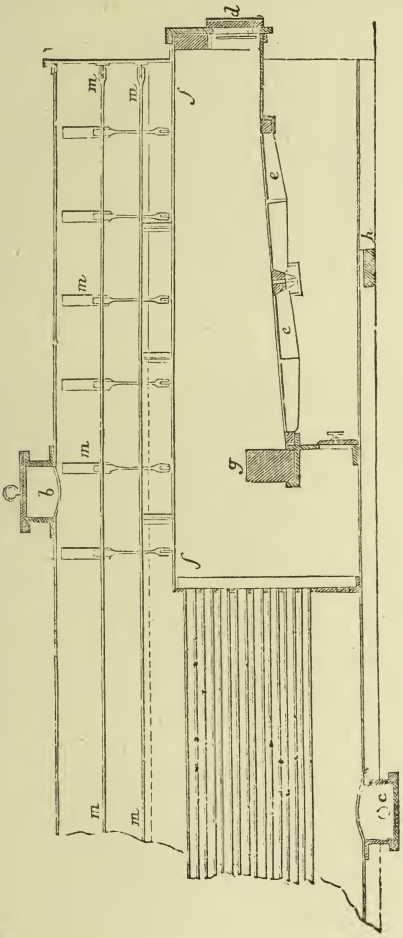

fig. 52.

water, and obtain space well through the upper part or dome of the boiler, where they unite in a chimney or flue. The heated air and smoke pass from the fire-place through these tubes, giving out these to the water with which they are surrounded. The water level is below the top of the tubes to some distance, so that space is allowed for steam. The heat of the tubes has a tendency to keep the steam dry, or "anhydrous," as it is termed, obviating the inconveniences to some extent of "priming." In fig. 55 we give a section of a good form of vertical boiler, patented and manufactured by Dunn and Co., of Manchester. The flame returns downward between the water spaces. The ash pits are placed under the floor, and

covered with iron plates, so that everything can be kept clean around the boiler.

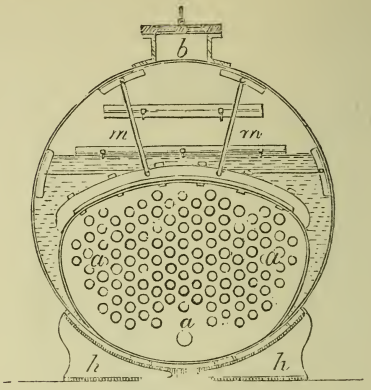

fig. 53.

In fig. 56 we give a diagram illustrative of the "Cup-surface Boiler," the invention of Mr. Barrans, manufactured by Messrs. R. and T. Hughes of New-Cross. By the adoption of a series of projecting hollow, or cup-like, surfaces, the heating surface of the boiler is very much increased, without any increase of size. An exceedingly effective boiler is said, by this means, to be got in small space, with quick evaporative powers. In a model boiler on this principle, containing seven and a half gallons of water, steam was raised in five minutes from the lighting of the coke, and blown off at a pressure of thirty pounds to the square inch. The temperature of the water at starting being sixty-three degrees Fahrenheit. "The evaporative power of this boiler has been tested by Mr. D. R. Clarke, and proved to be equal to the evaporation of between 11 and 12 lbs. of water for 1 lb. of ordinary coke, with a consumption of 18 to 21 lbs. of coke per foot of grate per hour. A boiler of twelve-horse power has been proved to have

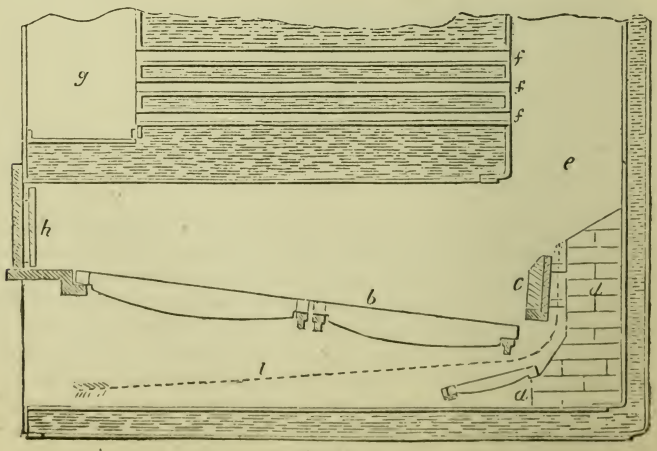

fig. 54.

consumed 28 lbs. of common gas coke per square foot of grate per hour, and at that rate of consumption to have evaporated 10 lbs. of water per 1 lb. of coke."

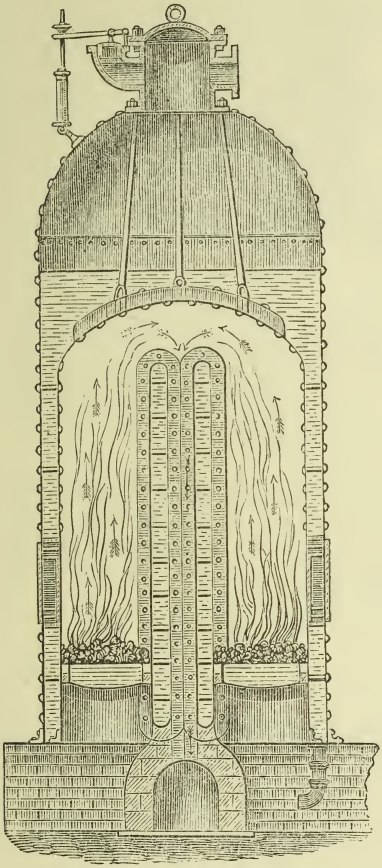

fig. 55.

In fig. 57 we give a drawing of a form of boiler unusually novel in its arrangement, and which is now attracting much attention. It is called the Duplicate Retort Boiler, and is manufactured by Dunn, Hattersley, and Co., Manchester. The main advantages sought by this arrangement, are to render an explosion less frequent, or, if it does happen, to confine its effects to a smaller portion of the steam-raising portions, and thus render it less dangerous. This is effected, as will be perceived, by glancing at the drawing, by making the boiler consist of a series of small boilers or cylinders. These are placed in a line parallel with each other; and the water-supply pipe is connected with one end of each, by a short pipe or neck.

The cylinders are about 10 feet long and 19 inches in diameter, made of quarter-inch best wrought-iron Staffordshire plates, and provided with

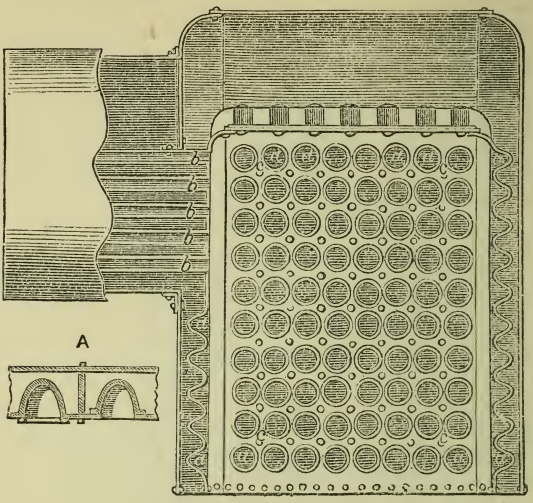

fig. 56.

strong cast-iron ends. The water level is maintained at about the semi-diameter line. The flame and heated air pass underneath and over the cylinders; and as the steam is generated, it passes by means of pipes attached to the walls of the cylinders, opposite to those with which the

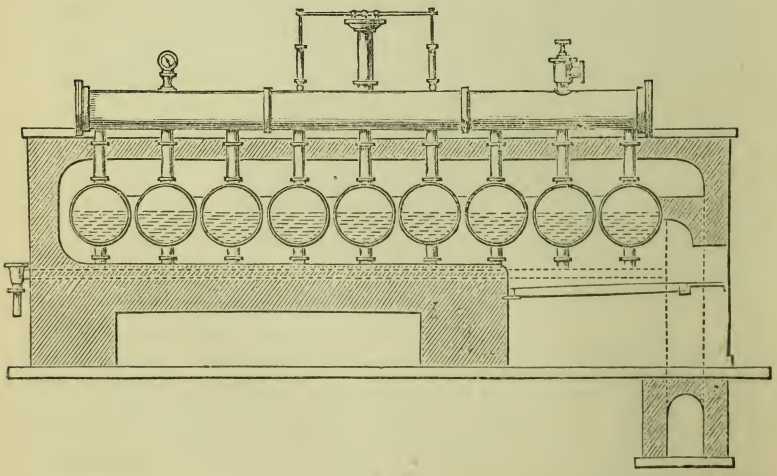

fig. 57.

water is supplied to the steam-chest placed above the range, as shown in the drawing.

Numerous advantages are said to arise from the use of this boiler, in

addition to those important ones already noticed. Thus the burning action of the fire may be equalised over the whole surface of the cylinder, by turning them gradually round; again, from the comparatively small size of the cylinders, easy transmission from place to place is secured. A boiler on this principle, tested at a recent experiment before several of the best known engineers of Manchester, burst at a pressure of 525 lbs. to the square-inch. A pressure, be it noted, very far exceeding that to which boilers under ordinary circumstances are subjected.

In fig. 58, we give a longitudinal section of Cowburn's "Patent Cellular Boiler," by which a large amount of heating surface is obtained, and, according to the patentee, equal expansion of the iron, less commotion of the water, facilities for repairs and inspection, and greater space for water and steam than the ordinary two-flued boiler of equal diameter. In the drawing, *h* shows the swing door in the upper fire bridge, "for the two-fold purpose of admitting a due supply of air, and

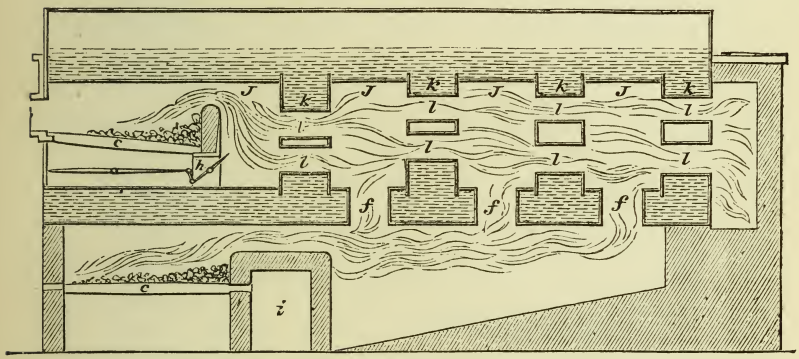

fig. 58.

of removing the ashes and flue dust. The bridge of the funnel under the boiler is hollow at *i*, to admit of the return flue-current passing from one side of the boiler to the other. The internal flue consists of a series of compartments or cells, *j j j j*, between which are the wells of water, *k k k k*, penetrated by a number of short wrought iron pipes, *l l l*, that connect and secure each portion of the internal flue longitudinally, and with the ends of the boiler. Each chamber or cell is also connected with the bottom of the boiler by a series of vertical flue passages, *f f f*, which admit the products of combustion from the lower fire, and allow the flue-dust to precipitate into the spaces beneath. The pipes placed between the fire-box and the first cell are three in number, one of which is placed over the two others for the purpose of enticing the flames to descend after passing over the bridge, and to intercept the flames from the lower fire at the bottom of the first cell. The flames being thus united, rise to the top of the second cell, as the second series of pipes are arranged in the inverse position (two placed over one), pass through them, again receive additions from beneath, and undulate and intermix in their passage from cell through pipe to cell. The united products of combustion are thus made to pass through the water, previous to their combined return by the side of the boiler, and a

considerable addition of heating surface is thus obtained *under* the boiler."



fig. 59.

The principle of boiler as patented by the Earl of Dundonald is considered good; it has been adopted with marked success in the line of Ocean American steamers of Collins. The diagram in fig. 59 shows the arrangement. The "boilers are provided with two rows of fire-places, and two tiers of tubes, one above the other, for the purpose of increasing the grate and boiler surface."

Having illustrated the forms of boiler introduced both for land and marine engines, to the extent we deem neeessary for the purposes of our work, we now proceed to illustrate the appliances of modern boilers.

In condensing, or low-pressure engines, the water is supplied to the boiler through a stand-pipe; this is of altitude sufficient to contain a column of water necessary to counterbalance the pressure of steam in the boiler. A small cistern is placed on the top of this stand-pipe, which is supplied with water from the hot-well by the power of the engine; a small valve is placed at the bottom of this cistern, which is opened by a lever; this lever is acted upon by the float in the inside of the boiler, the wire or rod connected with it passing through the top of the boiler, and fastened to the end of the lever; the arrangement has already been figured in Chapter II. In some instances, the wire or rod of the float passing through the boiler has stuck in its stuffing-box, and thus rendered the apparatus inoperative. A plan to obviate this has been recently introduced; this consists of a pipe, same height as the stand-pipe, containing a column of water; the rod of the float passing through this is moved without friction, and cannot stick. This apparatus of stand-pipe and float acts as a safety-valve in some measure, as before mentioned. The height of column of water in the stand-pipe is calculated so as to counterbalance the pressure of steam in the boiler; but should the pressure of steam increase beyond a certain point, the water will be forced out of the pipe through the valve in the cistern, and thus give timely warning. The stand-pipe has another apparatus connected with it, by which the degree of combustion in the furnace is regulated. At the throat of the chimney a valve, consisting of a flat plate sliding in a frame, is placed; when this is forced fully into its frame the aperture of the chimney is closed, thus preventing the smoke, &c., from the furnace gaining access to the chimney: by this means the intensity of combustion is lessened, and the fire finally goes out. In proportion, therefore, to the degree of opening of the mouth of the funnel, so will be the intensity of combustion in the grate. The sliding-valve has connected with it a chain, which, passing over two pulleys, is finally passed down the interior of the stand-pipe, and connected with a float which moves up and down in it. As the pressure of the steam increases in the boiler, the water is forced up the stand-pipe; this raises the float, and releasing the chain, the damper or valve at the mouth of the chimney is forced into its frame; the throat of the chimney is thus proportionally closed, the draught is diminished, the fuel in the furnace burns less fiercely, the pressure of steam is diminished, the water in the stand-pipe falls, and along with it the float; this tightens the chain, and the damper is pulled up.

In high-pressure engines, the chain of the damper passes over two pulleys, and is connected with a counter-balance weight, hung near the furnace door; the raising and depressing of the damper is done by hand.

In high-pressure boilers the water is supplied to the boiler by a force-pump, worked by the engine; the water being forced into the boiler against the pressure of the steam. A very ingenious apparatus for supplying high-pressure boilers with water, has been introduced by Messrs. Gray and Higginbotham, of Glasgow. A section of this is given in fig. 60. It is called the "Patent Bucket Boiler Feed," and the following is the description of the patentees. The drawing is a vertical section lengthwise of the apparatus as it is usually set on the boiler. It consists of a circular water-tank *a*, about twenty-four inches in diameter; in the centre of this tank is a close cylinder *b*. From the tank and cylinder, two pipes, *c* and *d*, are led into the boiler; at the upper ends of these pipes, the valves *e* and *f* are placed, both of which valves open downwards. One of the pipes, *r*, is carried into the boiler to the level at which it is desired to maintain the water. The other pipe, *d*, is carried further down, near to the bottom of the boiler, if thought advisable.

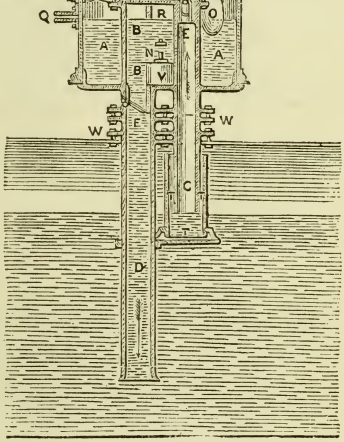

fig. 60.

Across the top of the tank, a lever *g* is placed, at the one end of which is the triangular *tumbling* bucket *h*; and at the other the back weight *i*. This lever oscillates on a bracket, *j*, near the centre. The valve *e*, at the top of the steam, or the shorter of the two pipes, is connected by the spindle *k* with the lever *g*. The water running through the pipe *l* into the bucket *h*, makes it heavier than the back-weight *i*, depresses that end of the lever, overcomes the upward pressure of the steam on the valve *e*, and thus, by means of the spindle *k*, opens the valve. The steam then passes through the valve *e*, by the passage *m*, into the close cylinder *b*, and presses the water contained in it down through the longer pipe *d*, by the valve *f*, into the boiler. By the time the close cylinder *b* is empty of water, the bucket *h* having filled, tumbles its contents into the tank *a*; the back-weight *i* resumes its preponderance, and raising the bucket end of the lever *g*, draws up the spindle *k*, and the valve *e* is closed. The steam in the close cylinder *b* is then condensed by the lower temperature of the water in the tank *a*, by which the close cylinder *b* is surrounded, and a partial vacuum being formed, the loose valve *n*, at the bottom of the cylinder *b*, opens, and the water again rises in the cylinder *b*. By this time, if the boiler requires more water, the bucket *h* has again overcome the back-weight *i*, and opened the valve *e*; the steam again presses the water down the pipe *d* into the boiler, and the same process is repeated as often as re-

quired. Whenever the water in the boiler rises above the mouth of the shorter pipe *r*, no steam passes up, and the feed ceases to act; for the water rising in the tank *a*, lifts the ball *o*, and shuts the cock *p* on the pipe *l*, through which the water runs into the bucket *h*. *Q* is an outlet for the superfluous water (of which there should be but little), and *r* is a small air-pipe, the cocks upon which should be opened just as much as will suffice to admit air into the cylinder sufficient to prevent the formation of a *perfect* vacuum. This pipe also allows air, generated by the steam, to escape from the cylinder. *T* is a shield surrounding the mouth of the pipe *e*, so as to secure a smooth surface of water. *Y* and *z* are catches to prevent the bucket tumbling or lowering the lever too far.

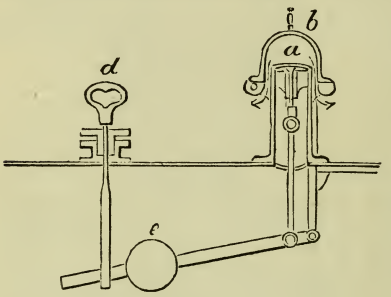

fig. 61.

Where the steam in boilers reaches a degree of pressure likely to be dangerous to its safety, what are termed "safety-valves" are used. Mr. Fairbairn calls them the only "legitimate outlets" in circumstances such as the above. Two should always be provided to every boiler, of sufficient capacity to carry off the quantity of steam generated by the boiler. To prevent additions being made to the weight, Mr. Fairbairn recommends a "lock-up valve," as represented in fig. 61; *a* is the valve; *b* is a shell of thin brass, opening on a hinge, and secured by a padlock; it is of such a diameter as to allow the waste steam to escape in the direction of the arrows; *c* is the weight which may be fixed at any part of the lever to give the desired amount of pressure, but which cannot be fixed or altered unless the boiler is opened to allow a man to get inside; *d* is a handle, having a long slot, by which the valve may be relieved or tried at any time, to obviate the liability of its corroding or being jammed; but the engineer cannot put any additional weight upon the valve by this handle. The sticking of the valve in its seat is always a fruitful source of danger.

As a valuable aid towards obviating such disasters, we here illustrate and describe, in fig. 62, the very neat valve registered by Mr. James Nasmyth, of the Bridgewater Works at Patricroft, which has met with very general and high approval, as uniting in a most simple combination all the qualities which can tend to the formation of a true and perfect safety-valve.

The total absence of all spindles or other guiding agencies, which have hitherto proved so fertile a source of mischief and uncertainty in the action and permanent perfect condition of this vital part of a boiler apparatus, will be seen at a glance to characterise the design of this absolute safety-valve.

The chief feature of novelty, however, which distinguishes this improved safety-valve from all others hitherto proposed, consists in the peculiar and simple manner in which the motion of the water in the boiler is employed, as the agent by which the valve is prevented from ever getting set fast in its seat. The swaying to-and-fro sort of motion which at all

times accompanies the ebullition of water in boilers, is made to act upon a sheet-iron appendage to the weight directly attached to the valve; and as the rod which connects this sheet-iron appendage and weight to the valve is inflexible, it will be easily seen how any slight pendulous motion given to the sheet-iron appendage is directly transferred to the valve; and as that portion of the valve which rests in the seat is spherical, the valve not only admits of, but receives, a continual slight motion in its seat in all directions, as the result of the universal pendulous motion of the appended weight, as acted upon by the incessant swaying motion of the water during ebullition. It will be seen that, as the spherical portions of the valve and seat are of equal width, the edges of their respective surfaces pass and repass each other continually, and so maintain and continually tend to

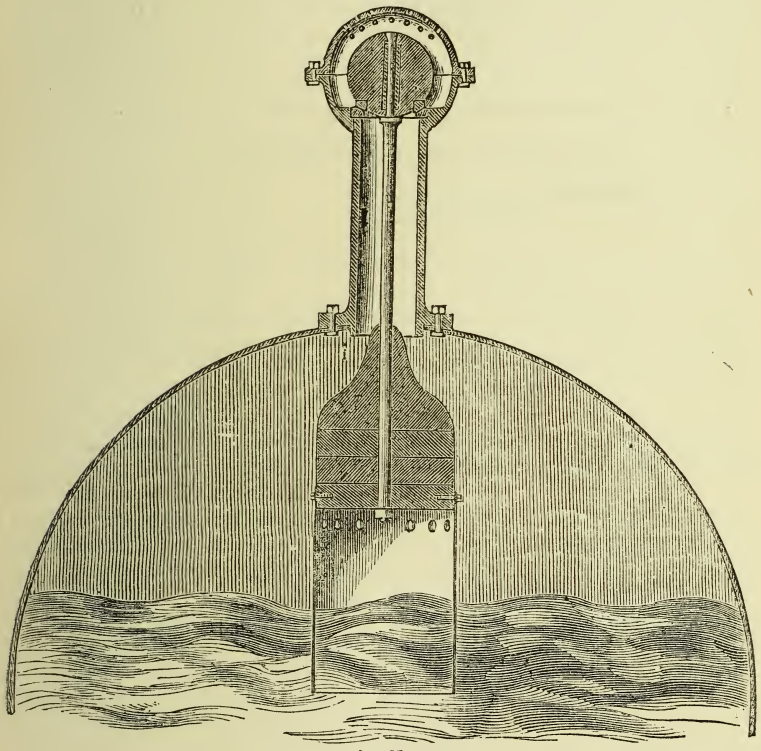

fig. 62.

improve the perfect spherical fit and agreement between the valve and its seat.

It may be proper to observe that, when the steam is nearly up to the desired pressure, the valve rests on its seat with a pressure next to no pressure at all, and is then, as it were, floating on steam. This action is common to all good valves, but the observation may tend to show a slight movement of the water affects the valve in its seat. A pipe may lead the

steam escaping from this valve to the manager's office, and there give audible notice of its escape by acting in a steam-whistle there placed.

In fig. 63 we give a section of Hopkinson's double safety-valve, which has been most extensively adopted. It serves a two-fold purpose, a safety-valve, to obviate explosion from *excess of pressure of steam*, and also from *a deficiency of water*.

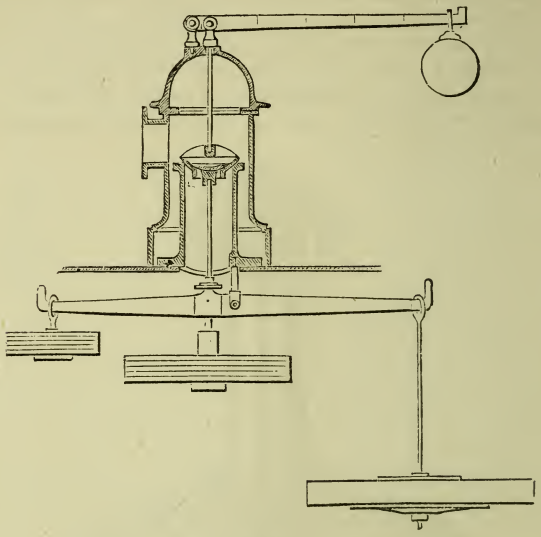

fig. 63.

Mr. Hawthorn, of the well-known Locomotive Engine-works, Newcastle-on-Tyne, has introduced a form of safety-valve, illustrated in fig. 64, designed to obviate the defects of the common safety-valve. The following description and illustration will explain the inventor's views on the subject. From the wide range of practical experience enjoyed by him, these are worthy of earnest consideration.* "In practice," he remarks, "the common mitre safety-valves, for steam-boilers, are found to lift to a very small extent for the escape of steam, when the pressure in the boiler exceeds the load upon the valve. If the latter be continued uniform, and the pressure of steam increased, the lift of the valve-lid is not in accordance with the increase of pressure, and is in no case proportionate to the full area of the valve. This defective lifting of the valve-lid is found to arise from a partial vacuum being formed underneath it by the radiating discharge of the steam forming an

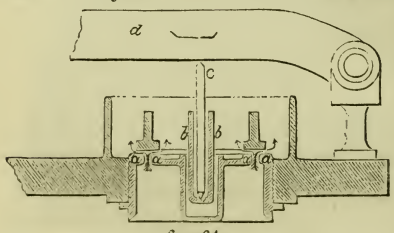

fig. 64.

* See *Catalogue of the Society of Arts Exhibition of Inventions*, 1855-6, p. 8.

inverted cone, the interior of which is kept in a state of exhaustion by the rapid diverging streamlets as they issue from the circumference of the lid as soon as it is lifted from the valve-fall. The annular valve has been designed with the view of counteracting this defect. The centre part of the lid is removed, and cast in one piece with the valve-seat, so that as soon as the valve-lid is lifted the steam can escape through the central part of it as well as past its external circumference, thus giving nearly double the amount of escape for the steam, with the same lift as a common mitre safety-valve of similar external diameter, and by using a greater number of rings with the same lift the escapement may be increased to any required amount. These valves also possess the further advantage of requiring much less weight to load them to resist a given pressure. The valve-faces are either made concave, and the lid of the form of the segment of a sphere, or they are made upon the same plane, so that the expansion of the metal by heat does not affect their bearings; and, by making the spindle or box of the valve-lid hollow, the valve is loaded by the weight-pin below the level of the faces, thus giving to the valve-lid a self-adjusting tendency, and, not depending on the boss or pin as a guide, they have a perfectly free action in their sockets, whereby friction is avoided. Fig. 64 is a sectional elevation of an annular safety-valve, with flat faces, *a a*. The spindle or boss, *b*, of the lid, is hollow, to allow the weight-pin *c* to pass down it. The valve is loaded by a lever *d*, and spring-balance *e*, in the ordinary manner."

Still further to obviate the risk of boilers exploding from a dangerous pressure, "fusible plates" are introduced sometimes on the top of the boiler. These are made of a composition calculated to melt at a comparatively low temperature. Fusible plugs are also introduced into apertures on the boiler below water-line; these melting, when the water gets too low, allow the steam to pass off. Little reliance, however, is to be placed on these contrivances.

All boilers are supplied with gauge-cocks, the nature of which has been already described; by these the level of the water in the boiler is ascertained.

Mercurial pressure gauges are frequently used to indicate the exact degree of pressure in the boiler. A glass tube is placed in a small cistern filled with mercury; one end is closed, the other opens to the interior of boiler in the steam space; the steam passing down the tube presses on the surface of the mercury; by this means the air in the upper part of the tube is compressed, and in proportion to the compression so is the pressure in the boiler. In improved gauges a scale is attached, which shows the temperature of the steam as well as its pressure in the boiler. In fig. 65 we give an illustration of Hopkinson's Mercurial Steam-pressure Gauge, in which many of the defects of ordinary gauges are said to be obviated. The drawing gives an external view of the gauge. It consists of a hollow iron casting, a glass tube, open at one end only, an iron tube, made expressly for the purpose, and an index, engraved in very legible characters. The glass and iron tubes have areas respectively proportioned, as 10 to 1, consequently a difference of one-fifth of an inch in the greater or glass tube will equal two inches in the smaller or iron tube, which, being open to the air, every two inches, when filled with mercury, equal one pound

of pressure. The tubes are placed in front of the iron casting. The glass tube being filled with mercury, the latter is pressed downwards by the force of the steam, and caused to rise in the iron tube.

When in use, the gauge may be tested at any time by closing the communication from the boiler at *a*, and unscrewing the plug *b*, the mercury should then stand in the glass tube at *o*. It may be cleaned at any time, by unscrewing the plug *c*, and withdrawing the glass tube containing the mercury.

Should any sediment collect in the bottom of the iron casting, it may at once be got rid of by removing the plug *d*.

In another class of steam-gauges the pressure is indicated by the movement of a finger-hand or dial. A well-known form, which enjoys a high reputation, is that of "Bourdon," of which we give a sketch in fig. 66. In this the steam has a spring of a peculiar construction.



fig. 65.



fig. 66.

The level of the water in the boiler is indicated, in addition to the "gauge-cocks," already explained, by the "water-gauge," the management and operation of which the reader will find described in the chapter on locomotives, fig. 111. In the form there illustrated, should the glass tube be broken, the steam and valve will have free escape, which may be attended with dangerous results. To obviate this defect, Mr. S. Smith, of Traffic St., City, London, has introduced an ingenious form of "water gauge," in which valves are supplied. In the event of the glass tube being broken, the pressure of the steam and water cause these valves to be instantly closed, thus preventing their egress. This form is illustrated in fig. 67.

The consumption of smoke arising from the fuel used to raise the steam in the furnaces of boilers, has long been a favourite pro-

ject among inventors, and the adoption of a good plan to effect this desideratum, always of importance, has more recently attracted earnest attention, from the fact of many corporations making it imperative on those who employ steam-engines to consume their own smoke. The limits of our work preclude us from fully going into this matter; we must therefore refer our readers to large works. We have space only to notice those inventions which have a high character. The first is the invention of Mr. John Lee Stevens, of London. "The invention," says Mr. Stevens, in his prospectus, from which our diagrams are taken, "consists in the combination of two sets of fixed fire-bars, the first of which is fed by the scoria and cinders voided from the second or upper set of fire-bars, with a calorific plate, as shown in the diagram; by which arrangement the current of air entering at the lower part of the furnace passes through two strata of fire, and thence between the calorific plate and the bridge, and is thus so intensely heated as continuously to produce the entire combustion of the gaseous products of the fuel, without the formation of smoke." An appendage to the furnace-door, which has a high reputation as an improver of combustion, and consequent preventer of smoke, and the economisation of fuel, is the contrivance known as Prideaux's Self-closing Furnace Valve, and which, through the kindness of the patentee, we are enabled now to illustrate and describe. This invention, illustrated in figs. 67 *a*, 67 *b*, 67 *c*, and 67 *d*, consists of an apparatus to be affixed to the fire-doors of furnaces, with the view of regulating the admission of air, in order to improve the combustion (and thereby economise fuel and

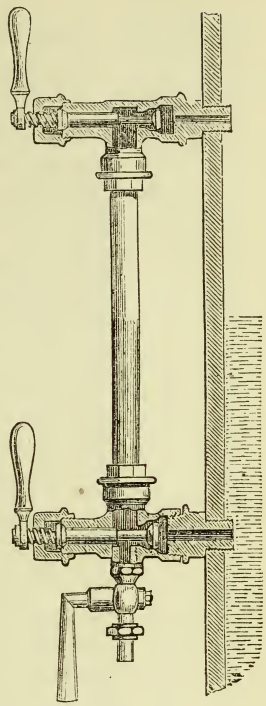

fig. 67.



fig. 67 *a*.



fig. 67 *b*

prevent smoke), and at the same time stopping the radiation of heat upwards.



fig. 67 *c*.

All that is necessary for its application is to remove the centre portion of the fire-door (or what is generally more feasible, cast a door consisting merely of a frame), insert the apparatus in the aperture thus formed, which it should exactly fit, and screw it fast.

The front of the apparatus (which thus constitutes the panel of the furnace-door) consists of a series of shutters *b*, traversing in axes *c*, so as to be capable of opening and shutting, like Venetian blinds. Behind these movable valves or shutters is a series of parallel plates *l*, fixed at a slight angle, a second series *m*, fixed at an opposite angle, and then a third and wider series of parallel plates *o*, which do not incline, with air-spaces *n p* between each series.



fig. 67 *d*.

By means of the slight inclination in opposite directions given to the first and second series of plates *l*, *m*, the direct radiation of heat from the fire outwards is prevented, although the air has free ingress, and the inclination being at an angle to the axis of the line of draught, has the further effect of causing the current of air slightly to impinge upon the surface of the plates in its passage, by which means the heat is more effectually extracted.

So perfectly does the above arrangement of plates and air spaces fulfil the object for which it was planned, viz., that of isolating the heat radiated against the inner surface of the fire-door, so as to confine it in the interior and prevent its passage outwards, and thus insure the whole being transferred to the entering current of air during the periods at which the valve is open; that after the shutters had been closed ten minutes, and the innermost row of plates had become red-hot, a thermometer, with its bulb in contact with the face of the shutters, marked only 64 degrees.

The gradual self-closing of the shutters, which constitutes so important a feature of this invention, is managed as follows. Each shutter has attached to it an arm *d*, which at its other end is attached by a pin-joint to the bar *e*, to which motion is imparted by a rod *f*, attached at its lower end by a pin-joint to the bar *c*, and at its upper end by a pin-joint to the lever *g*, the gradual descent of which, in any required time, is effected by its being connected with a piston *i*, traversing a water cylinder *h*, which piston, by means of a suitable valve, allows a free passage to the water from above to below, but resists its passage in the opposite direction; when the water is forced by the gravity of the lever, piston, and their appendages, from below to above, through the narrow channel *j*, the size of which, at the bottom, is adjusted by the screw *k*, so as to regulate the time of the passage of the water, and the consequent descent of the piston and closure of the shutters, with the greatest nicety.

The first valve made was tested from one minute to twenty minutes, and its performance found equally satisfactory at all stages, whilst, in practice, a range of from four to eight minutes is all that is required.

The same valve, having been fixed in a furnace-door and adjusted to six minutes, after an interval of eight weeks no perceptible variation could be discovered in its time of closing.

Still further to make the steam-engine automaton or self-acting in its arrangements, mechanism has been introduced by which the labour of the fireman or stoker is suspended, and the furnace supplied with fuel in proportion as required. Numerous contrivances have been introduced for this purpose.

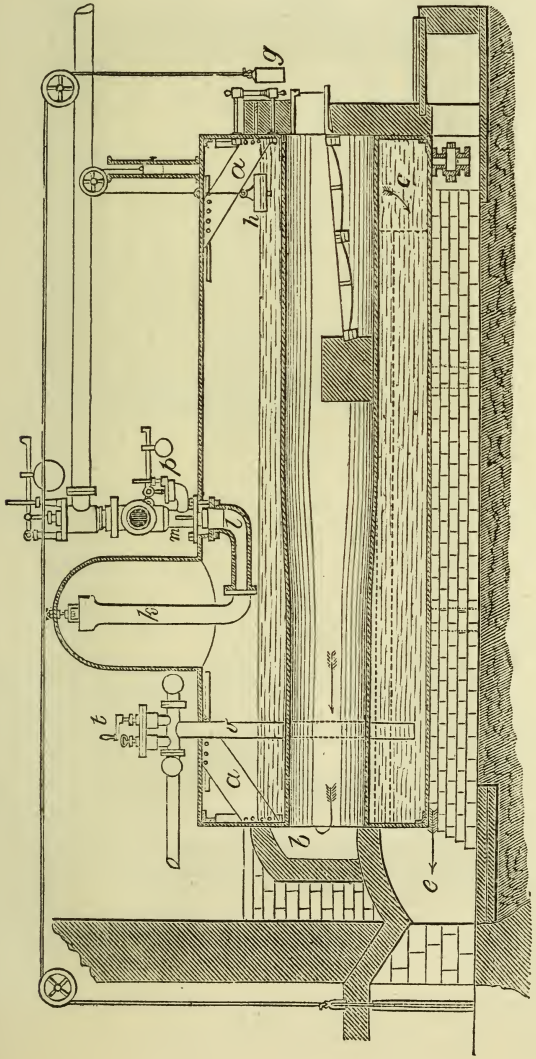

fig 63.

As a conclusion to the present division of our work, we give drawings of a high-pressure boiler with improved fittings, for which we are indebted to the courtesy of Mr. William Johnson. Fig. 68 is a "longitudinal

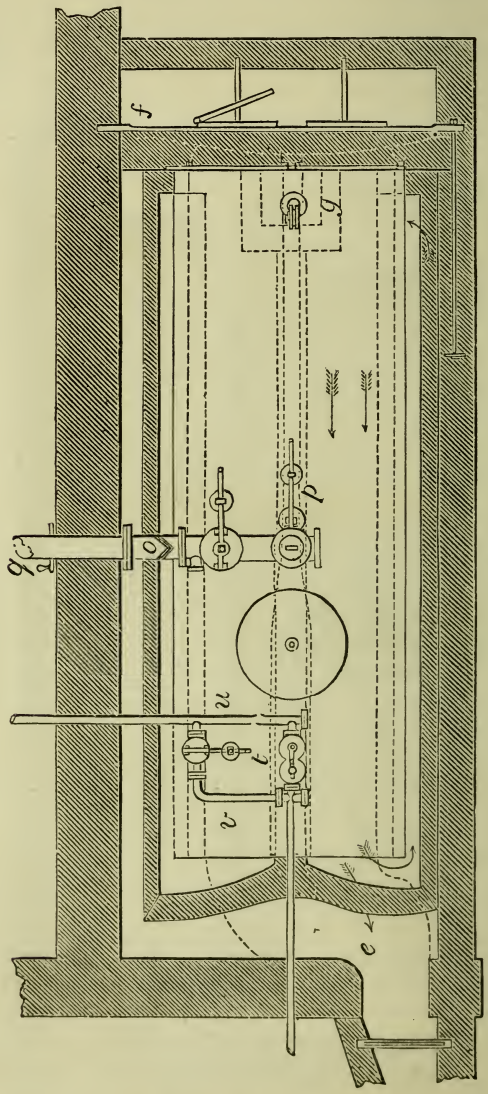

fig. 69.

section" of boiler, fig. 69 a "plan," and fig. 70 an "end elevation." The boiler of which these are drawings, is that adapted to the engine on the double cylinder principle, which we have illustrated in figs. 32, 33.

The class of boilers of which this is a good example, are considered by a competent authority to possess numerous features of economy and safety in working; and, as affording an example of what a good high-pressure boiler should be, we give it here. The length of boiler is 22 feet by 7

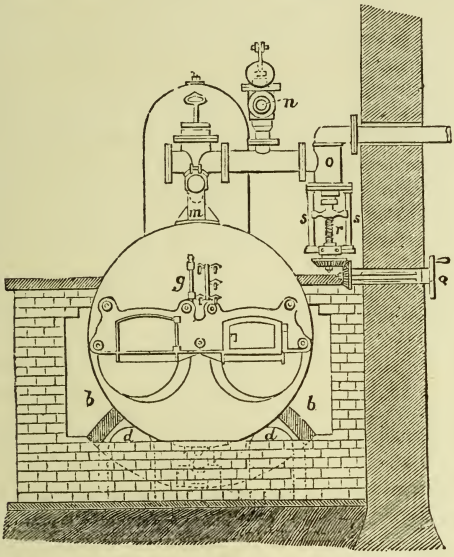

fig. 70.

feet 4 inches diameter; it has two internal cylindrical flues, in the entrances to which are placed the furnaces, $6\frac{1}{2}$ feet long by 3 feet wide. The flues



fig. 71.

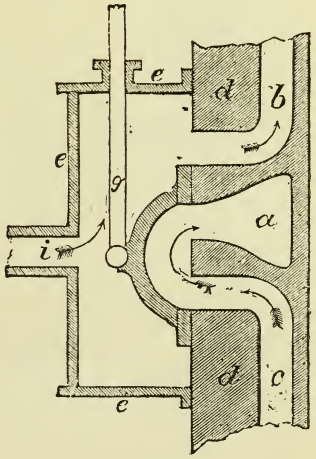

fig. 72.

are each 3 feet in diameter for a length of 12 feet from the front, after which they taper off to 2 feet 8 inches, as seen in the longitudinal section fig. 68, and by the dotted lines in the plan.

Cylinder-Valves and Pistons.—The steam is admitted to the upper and under sides of the piston by means of slide-valves generally, although in some cases lifting or puppet valves are used. Slide-valves are of three varieties—the "three-port valve," the "long D valve," and the "short D valve." Figs. 71, 72, show the arrangement of the "three-port valve." In the valve-facing of the cylinder, as *d d*, fig. 71, three apertures are cut, as *a b c;* that at *b* ends by a channel shown in fig. 72 to the upper side of the cylinder, that at *c* to the lower side, and that at *a* to the atmosphere. A valve-casing, as represented by *e e e*, is secured to the face of the cylinder; and into this the steam is admitted by the pipe *c c* proceeding from the boiler; a valve *h h* slides on the face of the cylinder, and is moved up and down by the rod *g* actuated by the engine; the valve *h h* is of sufficient size to cover two of the ports, one of which is always the exhaust port *a*. In the diagram the valve is so placed as to be admitting the steam from below the piston—this being at the top of cylinder—to pass up by the port *c* in the direction of the arrows, and out to the atmosphere by the exhaust port *a a*. As the steam which fills the casing cannot pass either by *a* or *c*, as the valve *h h* covers both of the apertures, it passes up the channel *b* by the port *b*, and presses on the top of the piston. The valve *h h* is therefore always so arranged, that when the piston is at the top of its stroke, the valve will cover the lower steam-port *c* and the exhaust *a;* while it is at the bottom of its stroke, the valve will then cover the upper steam-port *b b* and the exhaust. The valve-rod *g* is worked by an eccentric, as already explained in the work on *Mechanics and Mechanism*. The valve next to be described, and known as the "long D valve," is illustrated by the diagram in fig. 73. The ports for admitting steam to the upper and under sides of the piston are situated, one at top, as *a*, and the other at bottom, as *b:* the valve is semicircular, as at *m n*, and hollow at the back of the face *m*, which slides on the cylinder facing. The valve is of length sufficient to cover the bottom and top ports *a d;* steam is admitted through the pipe *c* to the hollow space *p p*, situated between top and bottom faces of slide-valve. Supposing top and bottom faces, as *m*, to cover both ports *a d*, the steam from the boiler entering through the pipe *c* will not gain admittance either through *a* or *d;* but will remain only in the hollow part *p p*. But suppose the valve to be moved by the rod *s s*, so that the lower port is opened, and a communication

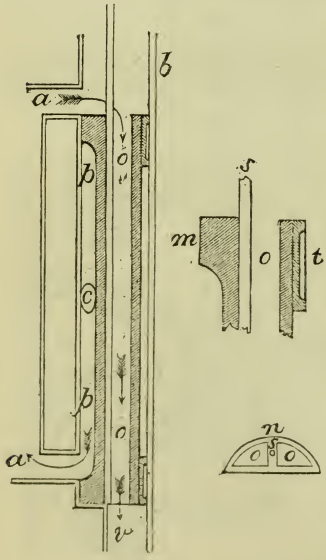

fig. 73.

made between it and the condenser through the pipe *v*, at the same time the upper port is opened and a communication made between it and the hollow space *p p*; the steam then enters above the piston, depressing it. By means of the eccentric the slide-valve is moved in the contrary direction; the upper port *a* is opened, and a communication made between the upper side of the piston and the condenser, the steam passing down the hollow at the back of the valve, as *o o*; the steam from the pipe *c* entering the cylinder by the port *d*, and the piston is turned up. By this arrangement it will be seen that an immediate communication is made between the condenser and under side of piston through the port *d*; but the steam from the upper side of piston passing through the port *a*, has to come down the channel along the whole length of valve before getting to the condenser by the pipe *v*. To prevent the steam from passing up or down as the ports are uncovered, the space between the back of valve, as *t*, and the inside of casing *b b*, is packed.

The "short D slide," which remains to be described, consists of two slide pieces *a b*, fig. 74, connected by two rods *c d*. In some cases only one rod is used, in others three; the section of this valve is similar to that of fig. 73, or the long D slide. In place of having one exhaust passage, the short D valve "has two separate exhaustor eduction-passages fitted to allow of the steam to pass to the condenser, one at the top of the slide-case, and the other at the bottom." Lifting or spindle valves are similar in construction to those used by Watt in his engines. In working large engines, from the pressure of the steam forcing the valve against the working surfaces, considerable difficulty arises in starting the engine; in some instances a small engine is employed to work the slide on first starting, in others the steam is admitted to both sides of the valve. The "balance-valve" is sometimes used in marine engines. These are much easier to work than the slide-valve. The "equilibrium-valves," used in pumping engines, consist "substantially of a cylinder open at both ends, and capable of being moved on a fixed piston with an upright stem. The cylinder stands over the hole in the steam-box, and the piston prevents the steam from passing through it; but when the edge of the cylinder is raised from the bottom of the box, the steam then gains an exit, and it is clear that the cylinder can be raised without any considerable exertion of force, as it is pressed equally in all directions. Instead of the rubbing surface of a piston, however, two ground valve-faces are employed in practice; and the moving part of the valve is not a perfect cylinder."



fig. 74.

In working expansively with the slide-valve, the steam is cut off by what is termed the "lap" of the valve. In engines not working expansively, the steam is allowed to enter the cylinder during its whole stroke; in this case, the length of the valve-face is just equal to the breadth of the steam-port. In working expansively the valve-face is lengthened, so that when the valve is at the middle of its stroke, there will be an excess of width of valve-face over the width of port. Thus in

fig. 74, let *d* be the upper and *f* the lower port of a long D slide valve; in the method of allowing the steam to enter the cylinder during the whole stroke of the piston, the valve-face would just be equal to the breadth of port; but where the expansive system is adopted, the valve-face, as above stated, is lengthened at the parts *e e*, the dotted lines giving the portion *a a* where no lap is used. Generally the lap is given in what is called the "steam side" of the port, that is towards *a a*; sometimes, however, the lap is made on the eduction side *t t* as well as towards *u u*, shown by the dotted lines. The effect of the "lap" on the valve is to cut off the steam at an earlier portion of the stroke than would otherwise be the case. An inspection of the diagram in fig. 75 will explain how this is effected: suppose the part *u* to be equal to the face of valve *a* without any "lap" to it—that is, equal to breadth of port *d*—when the lower edge of valve at *u* arrived at the upper edge of the port *d*, the port would be fully open; but if the valve happened to be lengthened to an amount equal to the part *c* below the dotted line, the port would in this case be closed a space equal to width of port *c*, instead of being fully open if the valve-face had been equal to *a*. In fig. 76 we give a diagram showing the lap



fig. 75.



fig. 76.

of a locomotive, or three ported slide: *a b* the steam ports, *c* the exhaust; the lap is towards the steam side of the valves, as *e e*. In working engines, it is considered to promote their efficiency by giving what is called "lead" to the valve; this is done by making the port open a little before the termination of the foregoing stroke; thus, suppose the piston just about to terminate the up-stroke, the upper port is opened a little, thus admitting steam before the other stroke is quite finished, and in consequence of the lap in the valve the exhaust port is opened sooner; so that by the time the piston begins its down-stroke, the steam from below the piston is escaping freely. If this arrangement was not adopted, we can easily conceive of the engine in its down-stroke having to press against the steam below the piston, which would get slowly out, inasmuch as the valve opens but slowly at the beginning of its stroke. To have the full perfection of working in the cylinder, the escape or release of the steam should be instantaneous if possible; the less steam the piston has to encounter in its motion either up or down the cylinder the better. By

the arrangement of the valves now described, the "lap" and the "lead," the speed of locomotives has been much increased.

To obtain the full efficiency of the expansive method of working, it is considered best to have the cut-off instantaneously effected—this the slide-valve cannot do: at the beginning of the throw of the eccentric the motion is slow, and is gradually accelerated; the valve is, therefore, both opened and closed slowly. In some cases, therefore, expansion-valves and gearing are adopted. One species of expansion-valve is identical in principle and construction with the "throttle-valve;" another form is shown in fig. 77, it is a species of double-beat valve; when this is raised, the steam from the boiler passing down *d* goes past the upper and lower valves *b c*, and through *e* to the cylinder. The supply of steam from the boiler to the pipe *d* is regulated by the ordinary throttle-valve; the upper valve *b* is made somewhat larger than the lower *c*; by this arrangement the pressure is greater on the upper valve, and tends to keep it in its seat; it will be observed that little opening of this valve will admit a large supply of steam, and that it is easily worked. The expansion-valve is worked by a series of levers and a *cam*. In p. 81, fig. 156, *Mechanics and Mechanism*, a diagram is given explaining how the revolution of a cam gives a reciprocating motion to the rod *g*; now suppose this rod to be connected with the expansion-valve, in such a way that it can lift it and depress it at intervals, and that these intervals are so timed as to close the expansion-valve at the exact period when the cut-off is to be effected, the system of expansive-working, with an instantaneous cut-off, will be carried out. It only remains for us to describe how the rod *g* is actuated on at the intervals required. Suppose the pulley *c* attached to the end of the lever *a*, fig. 156, *Mechanics and Mechanism*, p. 81, to be in contact with the circular part *a* of the cam; it is obvious that no motion of a reciprocating kind would result. But supposing the circular part to be only continued for a certain distance of its circumference, and that at one part the face of *a* swells abruptly out, when the pulley *c* came in contact with this portion it would be forced out, and the lever with which it is connected would have a reciprocating motion; this would act on the expansion-valve and raise it, admitting a certain portion of steam to work the piston. As soon, however, as the swelled portion of the cam, by its revolution, passed the line of the pulley *c*, the lever would be put into another position, and the valve would be instantly closed, thus effecting the cut-off. By having along the face or breadth of the cam a variety of swells or projections, and by mechanism by which the pulley can be brought in contact with one or other of these "steps" or "grades" as they are termed, any amount of expansion can be effected. The steps are so arranged as to cut off the steam at a certain period of the stroke; and thus the engineer can command any degree of expansion required, by making the desired step come in contact with the pulley: this is done by means of a screw. The pulley can also be disconnected from the cam.



fig. 77.

In a form of expansion-valve adopted in locomotives, a supplementary valve to effect the cut-off is placed above the ordinary three-ported slide In some cases the expansion-valve is worked by the governor acting on the cam, as in Maudsley's and Whitelaw's engines.



fig. 78.

The piston-rod, in moving up and down through the cylinder-cover, is kept steam-tight by what is called a "stuffing-box." This is shown in fig. 78: *a a* is part of the cylinder-cover; a cylindrical hollow cup or box is cast on this of a much larger diameter than the piston-rod *b b*; this is curved inwards, as shown in the diagram; the aperture in the cylinder-cover is a little larger than the piston-rod, to admit of its easy working; packing, composed of plaited hemp, is wound tightly round the piston-rod *b b*, at the part *e e*; the stuffing-box "cover" *n n* is placed above this packing, and screwed tightly down by the screws.

The piston, as originally made by Watt, was kept tight by hempen packing; metallic pistons are now almost universally used. That known as Goodfellow's is extensively used in Lancashire. In fig. 79 we give a transverse section of this: *a a* is the body of the piston, with shoulder turned on it at *e*; an annular ring *o* is placed loosely round the piston;



fig. 79.


fig. 80.

a plan of this ring is shown in fig. 80; this is turned eccentrically, and worked on its edge; this gives a uniformity of action to the whole circumference: its upper and lower edges are bevilled, as shown in fig. 82; these bevils bear or press against other rings *n n*, the interior of which are similarly bevilled, as shown in fig. 81. The outer springs *n n* are accurately


fig. 81.


fig. 82.

ground to the upper and lower plates *m* and *c*, and the whole secured by the screw-bolts as shown. The outer rings *n n* are kept pressed against the cylinder by the action of the internal ring *o o* lying loosely on the plate *c*. These diagrams will sufficiently explain the peculiarity of a metallic piston; for notices and illustrations of other varieties we must refer the reader to other and larger works.

Mr. Siemans, of Birmingham, an engineer well known for his ingenious inventions, has recently introduced a form of condenser highly spoken of.

and known as the "Regenerative Condenser." At a meeting of the Institution of Mechanical Engineers, Mr. Siemans stated that the origin of this condenser was a suggestion to the author, by Mr. Graham of Mayfield Works, "to recover the heat from the condensing in the form of a reduced amount of boiling hot water." It consists of an upright rectangular trunk *a*, of cast-iron, the lower end of which is cylindrical, and contains a working piston *b*, which performs two strokes for each one of the engine. In the trunk is a set of copper plates *c*, upright and parallel to each other; the intervening spaces being the same as the thickness of the plates, viz., between $\frac{1}{12}$th and $\frac{1}{16}$th of an inch.

The upper extremity of the condenser, fig. 83, communicates on the side *d*, to the exhaust-port of the engine; and on the other, through a valve *e*, to the hot well. The plates are fastened together by five or more thin bolts, with small distance washers between each plate. There is a lid at the top of the trunk, by removing which the set of plates can be lifted out. Immediately below the plates the injection-pipe enters.



fig. 83

The action of the condenser is as follows: Motion is given to the piston. At the moment that the exhaust-port of the engine opens, the plates are completely immersed in water; a little of which has entered the passage above the plates, and is, together with the air present, carried off by the rush of steam into the hot well, the excess of steam escaping into the atmosphere. The water then, in consequence of the downward motion of the piston, recedes between the plates, exposing them gradually to the steam, which condenses on them. Their upper edges, emerging first from the receding water, are surrounded by steam of atmospheric pressure, and become rapidly heated to about 210°. The immersion of the plates still continuing, the steam is constantly brought into contact with fresh cool surface, by which the greater portion of it is condensed; until, as the piston descends, the injection enters, and completes the vacuum. This is done by the time the working of the piston of the engine has accomplished one-seventh of its stroke. The upper extremities of the plates become heated to near 210°, and the lower to about 160°.

Taking the initial temperature of the condensing water at 60°, the final temperature at 210°, the latent heat of steam at 212° 960 units, the quantity of water required is 6·6 lbs. to condense 1 lb. of steam of atmospheric pressure. The common injection condenser (supposing the temperature of the condensed steam to be 110°) requires 21·2 lbs. in place of 6·6 lbs.

In fig. 84 we give a drawing of the ordinary vacuum gauge, used in connection with condensers in order to ascertain the degree of vacuum attained. The mercury is contained in a cast-iron cup open to the atmosphere; in this is placed a glass tube, open at the lower end and closed at its upper. A small iron tube is provided with a stop-cock, and connected with the condenser; this tube passes through the mercury in the cup, and up the interior of the tube near to its top. The air is exhausted from the glass tube through the iron tube connected with the condenser, as the

mercury rises in the glass tube in proportion to the difference between the pressure of the uncondensed vapour in the condenser and the pressure of the atmosphere. To show the higher vacuums of 29 and 30, the height of this gauge must be nearly three feet. To obviate the inconvenience attending this form of gauge, the short vacuum gauge is used, as in fig. 85. A small glass tube contains the mercury, and is filled carefully as an ordinary barometer: it is bent upwards at the bottom, and ends in a bulb, which is provided with a small orifice at the upper side. The tube is attached to a scale, and entirely inclosed in a glass case, which is carefully



fig. 84.



fig. 85.

cemented to a brass cup, terminating in a stop-cock and pipe connected with the condenser. The air in the interior of the glass-case is always of the same density as in the condenser. In the long vacuum gauge, in fig. 84, the mercury is driven frequently out of the cup, if the stop-cock is left open while blowing through previous to starting. The short vacuum guage, although possessed of many advantages, as shortness and compactness, has also disadvantages; these are, first, the vapour from the condenser deposits frequently a mist in the glass case so dense as to obscure the scale; and secondly, if the stop-cock is not shut while blowing through, the case becomes filled with steam or with hot water; and its safety is thereby endangered. To obviate these inconveniences, Mr. Bramwell, of London, has designed an improved vacuum gauge, which he described before the Institution of Mechanical Engineers.

In the companion volume to this treatise, *Mechanics and Mechanism*, we have described pretty fully the details of construction of the various

parts of steam-engines, as connecting-rods, cranks, &c., and the method of putting the various parts together; we proceed, therefore, to the consideration of other matters worthy of notice.

In cotton-mills, and in cases where the engine is loaded to a certain extent, accidents frequently occur by parts of the machinery breaking down. The engine, thus relieved of a certain part of its load, "runs away," as it is termed, at a greatly increased speed, endangering the stability of the whole apparatus. The ordinary mechanism of the throttle-valve and governor is not found capable of making the engine recover its usual speed. An ingenious contrivance, highly esteemed, is given in the following diagram, fig. 86. The main object of this invention is to prevent damage by the accidental alteration of load, and to regulate the speed of steam-engines. It is intended to supersede the common throttle-valve, and prevent variation of speed and the many breakages arising from accidental alterations of weight. The valves can readily be connected with ordinary governors; and when attached, are so sensitive, that should a shaft break, or any weight be suddenly thrown on or off, the engine will recover its usual speed in less than two revolutions, without any interference by the engineer. This will be obvious, when it is considered that there are two valves fitted to the same spindle; and consequently, that each of them need be opened to only one half the extent, as if there were one valve. The result is, a throttle-valve of extreme sensibility, half an inch being the utmost amount of play allowed to the spindle between wide open and quite shut; therefore, a very slight change in the position of the governor-balls produces considerable change in the amount of opening afforded by the valves.

The governor is connected with the valve-spindle by a fork, in the usual manner, which, by means of a crank-lever, gives a slight motion on its axis to a bar, provided at the other end with another crank-lever connected with the valve-spindle. It may be attached to all ordinary governors. In the case of two fifty-horse engines coupled together in Sir C. Armitage's mill, at Pendleton, near Manchester, the result of a trial by throwing off the whole weight was the recovery of the usual speed in

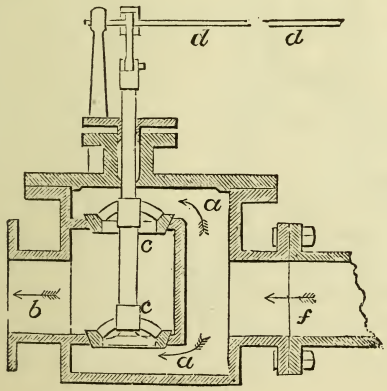

fig. 86.

$1\frac{3}{4}$ revolutions. The load on these two engines consisted of 20,000 throstle-spindles, 13,000 mule-spindles, and 250 power-looms, with all the necessary apparatus for working the mill.

In fig. 86 we give a diagram illustrative of this apparatus, so capable of instantaneously regulating the performance of engines. *a* is the steam pipe from boiler, *c c* the double-beat valve; when this is raised by the lever actuated on by the lever *d* of the connecting-rod, the steam passes from *a* in the direction of the arrows to the steam delivery-pipe *b*.

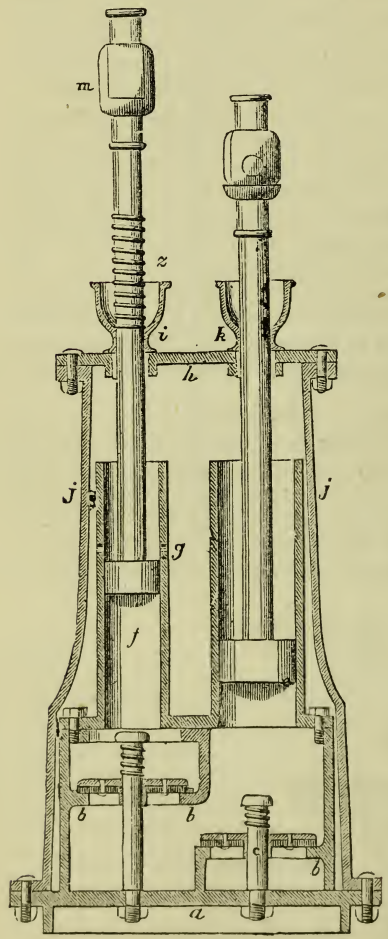

fig. 87.

The "hydraulic motion regulator" is an American invention, recently introduced into this country, and which has already taken a high place as an effective governor for steam-engines; we give a diagram and description of this apparatus, taken from the inventor's circular (Mr. Pitcher). The principle of the invention consists in working a small pump, the water delivered by which acts in the plunger of a second cylinder or barrel: the water from the pump escapes through an aperture of a certain area; this is calculated so as to maintain the plunger at a certain height in the cylinder. Should, however, the speed of the engine increase beyond its regular working speed, the pump is in consequence worked faster, and a greater quantity of water delivered to the plunger cylinder: but the aperture for its escape remaining unchanged, it cannot get away, it therefore fills the cylinder to a higher level; this raises the plunger, which, connected with the regulating-valve or throttle-valve, lessens the supply of steam to the cylinder and reduces the speed. The pump is worked by the engine by any of the ordinary methods of connection. In fig. 87, *e* is the pump worked by the engine; *c* the suction-valve, through which the supply of water is obtained; *b* the delivery-valve, supplying the cylinder *f*. To prevent the plunger from rising higher than necessary, a small hole *g* is made in the cylinder; when the plunger rises above this the water escapes by it, and

the plunger rises no higher. The piston-rods pass through the bonnet or cover of the external casing *j j;* cups *i k* are used to return any water that may be drawn up through the stuffing-boxes; the piston-rods are thus lubricated, or made to work smoothly, with water surrounding them. The whole apparatus is inclosed in the casing *j j;* so that the same water is used over and over again. A spring is coiled round the piston-rod of plunger *f* at *z;* this prevents its falling further than necessary. The opening by which the water ordinarily escapes is made just above the delivery-valve *b;* and the amount of opening is regulated by a handle or lever which passes through the cover *h*, according to the speed at which the engine is desired to run. In place of the ordinary throttle-valve, the inventor prefers to use a regulating-valve similar in principle to the disc-valve employed as the "regulator" in locomotive engines.

In calculating the power of steam-engines, there are two terms used—the "nominal power," and the "actual or effective power." By the term "nominal power," reference is made to an engine having a cylinder of given length of stroke, and a uniform pressure upon the piston of 7 lbs. per inch. Watt calculated the effective pressure on the piston in small engines at 6·8 lbs. per inch, and in large—as 100 horse-power—at 6·94; 7 lbs., however, is the effective pressure calculated. By the term "actual" power, is meant the number of times 33,000 lbs. the engine is capable of lifting 1 foot high per minute. By the term "duty" of an engine, is meant the amount of work done in relation to the amount of fuel consumed.

In calculating the nominal horse-power of an engine, the following rule is adopted: "Square the diameter of the cylinder, and multiply the number of square inches thus found by the cube-root of the length of the stroke in feet, and divide the product by 47; the quotient is the number of nominal horse-power of the engine."

By the term "horse-power," as introduced by Watt, was meant the mechanical force necessary to lift 33,000 lbs. 1 foot high per minute. Prior to the introduction of steam-engines, the work at mines, &c., was done with horse-power; it became, then, of importance to be able to state the amount of work done by a steam-engine, as compared with a given number of horses. Engines now, however, calculated at the above rate, really exert a greater power than the nominal power; it is, therefore, of importance to be able to calculate the "effective" or "actual" of an engine, without reference to its "nominal" power. This is done by means of the "indicator," which gives the effective pressure on the cylinder of the engine; from this is deducted a pound and a half of pressure absorbed in friction, &c.; the velocity of the motion of the piston in feet per minute is ascertained by multiplying the number of revolutions of the engine per minute by the length of stroke. These data having been obtained, the following rule gives the effective power of the engine: "Multiply the area of the piston in square inches by the effective pressure (below), and by the motion of the piston in feet per minute, and divide this by 33,000; the quotient is the actual number of horse-power." For each horse-power of an engine it is calculated that 33 cubic feet of steam is expended per minute, or an evaporation of 1 cubic foot of water per hour. The combustion of 1 lb. of coal is calculated to raise 6 or 8 lbs. of water into steam; Watt reckoned $7\frac{1}{2}$ lbs. of water to be evaporated by the combustion of 1 lb.

of coal. In the modern Cornish engines, the same quantity of fuel evaporates 10 lbs. of water. Land engines are generally calculated to consume 10 lbs. of fuel per hour for every nominal horse-power, or 5 or 6 lbs. for each actual horse-power. In the Cornish engines the duty of an engine is "expressed by the number of millions of pounds raised one foot high by a bushel, or 94 lbs. of Welsh coal;" a bushel of Newcastle coal will only weigh 84 lbs.; and, in comparing the duty of a Cornish engine with the performance of an engine in some locality where a different quality of coal is used, it is necessary to pay regard to such variations." In the engine at Long Benton Colliery, erected by Smeaton, the duty performed was equal to 9·45 millions of pounds, raised 1 foot high by the consumption of 1 bushel of Newcastle coal. In the present time, what with improved engines and boilers, and the extensive adoption of the principle of expansive working, the duty of Cornish engines is estimated at 60,000,000 lbs.; and in some instances a duty has been obtained equal to the large amount of 100,000,000 lbs. raised 1 foot by the consumption of 94 lbs. of fuel. For much valuable practical information on the power of engines, the heating surface for each horse-power, &c. &c. we refer the reader to Bourne's *Catechism of the Steam-Engine.*



fig. 88.

To conclude the present division, we give a description and diagrams of the important instrument, the "indicator," so necessary in computing the effective power of steam-engines. A small cylinder, as *a*, fig. 88, is placed in connection with the interior of the cylinder, either above or below the piston,—generally it is screwed into the aperture made in the cylinder-cover; a stop-cock is placed in the pipe *b*, by which the connection between the interior of steam-engine cylinder and that of the indicator can be closed or opened as required. Into the cylinder *a* a piston works; within the interior of the rod *c* of this, which is made hollow on purpose, a spiral spring is placed; the lower end of this is fixed to the piston, and the upper to a small cross-head *e*, supported by side-rods, connected with the cylinder *a a*. To the top of the piston-rod a pencil *f g* is attached; the point of the pencil works in contact with a slip of paper wrapped round the small cylinder *h*, and kept in contact with it by the vertical strip of brass *i i*, on which is marked a scale. The axis of this cylinder *h* is continued downwards, and provided with a pulley *k*. This pulley is connected with the parallel motion, or other reciprocating part of the engine, by which motion is given to it, causing it to revolve only in one direction: the cylinder *h* makes its return motion to its original position by a spring coiled up in the bottom near *s s*; the direction of the cord, after leaving the pulley, is changed by a guide-pulley not shown in our diagram. The effect of the two motions, namely, the up and down motion of the piston, and the revolution of the cylinder *h*, is to cause the pencil *g* to describe a curve, varying in its outline. Before the connection is made between the interior of cylinder *a a* and the steam-engine cylinder, what is called the atmospheric line is

drawn on the paper; this is effected by pulling the cord, or allowing the engine to act on the pulley. The cock at the pipe *b* is then opened, when the piston is at the top of its stroke: the steam acting on the cylinder (steam-engine) piston acts also on that of the indicator; this will therefore rise, and with it the pencil, which is made to press slightly on the surface of the paper by a small spring; at the same time the roller or cylinder revolves. A line is thus traced on the paper, which rises higher up on the cylinder as the pressure of the steam increases, and comes lower upon it as the steam-pressure subsides."

The method of ascertaining the pressure on the piston of the engine, from the diagram thus obtained, is very simple, and will be easily understood by reference to fig. 89. Suppose *a b c d* to be the slip of paper on which the indicator diagram has been taken, and *e f* the atmospheric line, the divisions at the ends, as at *b c*, correspond to the divisions of the scale *i* on the indicator, fig. 88. Divide the length of the diagram into any number of equal divisions, and through these draw lines at right angles to the atmospheric line *e f;* measure the lengths of the spaces thus formed by the intersection of the diagram with the lines, as the length from *m* to *n*, and from *r* to *s*, and so on (the measurements must be taken from a scale corresponding to that in the indicator-scale), and all the lengths together; divide this by the number of spaces, and the quotient is the mean effective pressure on the piston in pounds per square inch. We have already described the rule for calculating the effective pressure of the engine. The indicator is not only useful to ascertain the amount of power exerted by the strokes of a steam-engine, but it serves also to point out particular defects in the working. Thus the nearer the diagram attains to the form of a parallelogram, the more perfect is the working of the engine. Where certain deviations from the square at the corners are indicated on the diagram, certain defects are made known.



fig. 89.

For full information on the practical working of the indicator, and the method of ascertaining the defects, as indicated by the diagram obtained by it, we must refer the reader to other and more practical works—as the *Indicator and Dynamometer*, by Professor Main and D. Brown; published by Hebert, Cheapside.

CHAPTER IV.

ROTATORY ENGINES AND OTHER VARIETIES.

To obtain a rotatory motion by the direct action of the steam, without involving the use of motion, as in the piston-rod of a cylinder engine, has long been a favourite problem with many mechanics, from the supposition that the various parts of an ordinary engine, as the piston, beam, connecting-rod, and crank, were not merely inconvenient, but acted as counteracting agencies to the full development of the power of the engine. Numerous attempts have therefore been made to substitute an engine in which the main shaft received motion directly from the action of the steam. The advocates of the rotatory class of engines, assume a loss of power by the use of the crank. This opinion arises from a misconception of the principles of its action. There is no doubt that an efficient rotatory engine would be highly useful for certain applications, as to drive a screw-propeller, where direct action is required; and a great saving of space and material would also be effected; but so far as the assumed gain of power which would result from its introduction is concerned, it may be taken as a general truth, supported by the best mechanical authority, that no advanvantage of this kind would be possessed by it over the ordinary kind. The great desideratum indeed now hoped for, by the introduction of a rotatory engine among well-informed mechanics who devote their time to its attainment, is not a gain of power, but only a simpler and more convenient mode of applying it. "Such a gain," says the reporter to the jury, section A. class v. Great Exhibition, "might indeed result from a freer access of the steam to the piston, from a diminution of the friction or the jar of the working parts, or from a more complete expansion; but, thanks to the more general diffusion of information in mechanics, practical men now know that there is no more possibility of increasing the work of an engine by merely altering the direction of any of its working parts, than there is of increasing the quantity of water which a reservoir will supply, by varying the pipes which serve to distribute it."

Although eminent authorities on engineering matters have expressed opinions inimical to the idea that a good rotatory engine will be introduced to supersede the reciprocating engine; still it is right to state that others, perhaps of equal standing, hold the contrary. The result, however, of the various discussions entered into on the point, seems to be that, if the engines can be kept tight, and the uniformity of wear in the packing effected, the great difficulty attendant on bringing them into practical operation will have been obviated. That this difficulty is one of no ordinary kind, may be gathered from the statement of one of our practical engineers, that "he would as soon think of inventing perpetual motion, as of overcoming it."

We now proceed to illustrate the principle of a few of the most celebrated engines of this class yet introduced.

Rotatory engines are of several kinds; the Æloipile of Hero, already described, is an engine of the reaction species. A modern modification of

this is exemplified in Avery's engine, introduced by Ruthven of Edinburgh, and to which, at one time, considerable attention was attracted.

This engine consists of two hollow arms *a b*, fig. 90, attached to a central pipe *c*, which revolves on its axis, and gives motion to the pulley *e*, from which the power is distributed as required by a belt; at opposite sides of the extremities of the pipes or arms *a b*, apertures are made, and the steam issuing from these in contrary directions, as in Hero's, cause the arms to revolve with great rapidity: steam is admitted to the arms through the pipe *d*. The arms are inclosed in a case *f f*; and the steam, after working, is let off to the atmosphere by a pipe communicating with the bottom of the case *f f*. The cold-water pump is worked by an eccentric on the horizontal shaft. Although several engines of this class have been introduced, and, according to the patentee, with marked success, as simple and economical, yet their number is by no means increasing. One great objection to it is the high pressure of the steam employed, and the limit to the power of the engine set by the difficulty of increasing the length of the arms *a b*, so as to obtain increase of power; the amazing velocity at which the arms revolve, 3,000 and 4,000 times per minute, makes it also liable to speedy disarrangement of parts.



fig. 90.



fig. 91.

Rotatory engines are sometimes made on the impulse principle, as exemplified in Branca's steam-wheel, already noticed.

The next class of rotatory engine to which we will direct the reader's attention, is that in which the piston is made to revolve round its axis. In the patent granted to Watt in 1769, he included a claim for a rotatory engine; and, from his own statement, it appears that "a steam-wheel moved by force of steam, acting in a circular channel against a valve on one side, and against a column of mercury or other fluid metal on the other side, was executed at Soho upon a scale of six feet, and tried repeatedly; but was given up as several objections were urged against it." This failure did not, however, influence Watt to give up his trials; but in 1782 he took out a patent for two engines on a similar principle: one of these we here append an illustration of. In fig. 91, *a a* is a circular casing, *b* an axle

passing through the stuffing-boxes at the ends of the casing, *c* a piston revolving in the case, *d* a valve which, turning on a hinge like a door, passes into the recess *e*; *f* the pipe admitting the steam to the casing, *g* that leading to the condenser. The valve *e* extends the whole depth of the cylinder. On steam being admitted to the casing, it presses on the piston *c*, and causes it to revolve; on reaching that part of the casing near the eduction-pipe *g*, the piston strikes the valve *d*, and forces it into its seat *e*; the steam-entrance is thus closed, and the steam in the casing rushes to the condenser through *g*. On the piston passing *e*, the valve *d* falls open as before, admitting steam to the casing to act on the piston. From the force with which the piston strikes the valve *d*, the machine rapidly falls into disrepair.

From the great variety of rotatory engines of this class which have been introduced from the time of Watt till now, it is quite an impossibility for us to notice even a small proportion of their number; we must refer the reader to larger treatises, where several of the most ingenious are illustrated.

The "elliptic rotatory engine" is one of the most successful examples of the modern attempts to apply steam-power directly to a revolving crank-lever, so as to economise steam, lessen the weight, simplify the constructive details, and convey the power directly to its work. Such an engine is, indeed, practically equivalent to the causing the steam to lay hold of and actuate the crank or revolving-shaft, just as the hand turns round a winch, without the intervention of joints, levers, and connecting-rods. It is the invention of Mr. William Hyatt, the engineer to Champion's extensive Vinegar Works, of Old Street-road, St. Luke's, London, and is being carried out by him, in conjunction with Mr. Wright, the managing proprietor of the works. The essential peculiarity of the engine is to be found in the fact, that the steam-cylinder is bored elliptically, in order that the revolving piston within it, when set upon a shaft disposed eccentrically in relation to the minor axis of the ellipse, may fit accurately to the elliptic surface throughout the entire revolution. This is a peculiar and unlooked-for characteristic of the elliptical figure. The true action is only to be secured when the amount of ellipticity is exceedingly slight, the centre of motion of the revolving piston-shaft being in a line intersecting the minor axis, at about one-third the length of such axis. That such an engine does work in the most satisfactory manner, is now practically exemplified at the Old-street Vinegar Works, where the engine, from which our drawings in figs. 92, 93, and 94, were made, is in daily operation. (1853.)

Fig. 92 is an external longitudinal elevation of the engine in working order. Fig. 93 is a corresponding end-elevation at right angles to fig. 92, the front end cover of the cylinder being removed to show the piston within. Fig. 94 is a plan of the engine.

A steam-engine, to which much attention has been directed of late, is that known as Simpson and Shipton's Reciprocating Steam Engine. To an arrangement of parts of simplicity in detail, it adds the novelty of a movement remarkable for its originality. Although in many respects resembling at first sight an engine of the rotatory plan, it is nevertheless a reciprocating engine, only differing, in the words of the inventors, from the ordinary engine in the means adopted for obtaining the revolving motion direct out of the rectilinear, the principle through which power is

obtained being the same as in the ordinary reciprocating engine; a piston acted upon by steam being propelled in a rectilinear direction in a cylinder

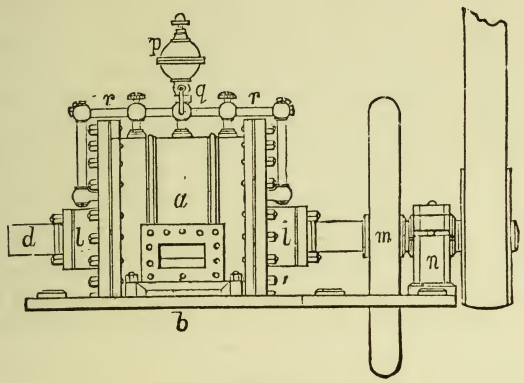

fig. 92.

or steam-chamber, which, in the present case, is square or rectangular instead of circular, the germ of the engine being "an eccentric revolving



fig. 93.

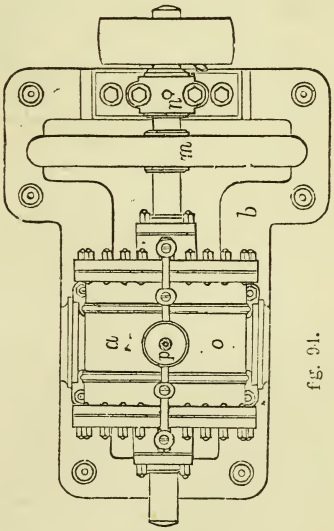

fig. 94.

in its own diameter;" and which is, in fact, the piston and crank combined in one body; this having in itself two distinct motions, rectilinear and



fig. 95.

revolving. The following is derived from the inventors, descriptive of the principle and arrangement of the engine. In fig. 95 suppose *a* to be a crank filled up completely between the sides of the steam-chamber *e f*; when steam is admitted above the crank *a*, as shown by the arrows, it moves into the position shown by *b*; in that position, however, it will be observed that the crank will be too short to fill up the chamber, and the steam would consequently rush past it to the lower part of the chamber; it therefore becomes necessary to change the form of the crank, making it such that, at every position, the space between *e f* may be filled up; this form resolves itself into the circle *g g*, with the shaft or axle *c* passing through it out of the common centre; this is therefore an ordinary eccentric. When steam is brought to act on its surface, it is propelled into the dotted position *i i*; and from its being eccentric, a revolving motion is obtained during its propulsion.

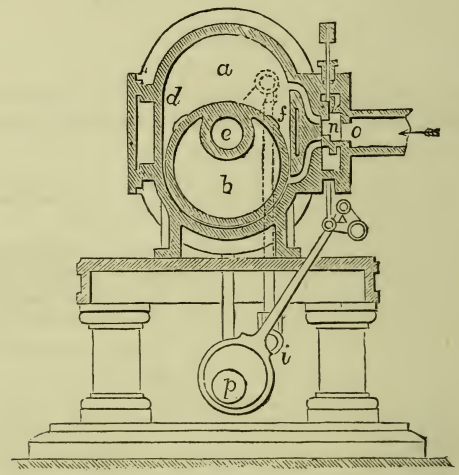

fig. 96.

In fig 96 is a transverse section, and in fig. 97 a longitudinal section, showing the arrangements by which this principle is carried out; *a* is the steam-chamber or cylinder; *b* the piston, keyed on eccentric to the shaft *c*, and carried on the rods *f f*, vibrating from the crank-shaft pedestals. This piston is turned true on the periphery; and in each end are turned conical seatings, in which are fitted rings of metal *k k*, cut open on one side, leaving a lap-joint to prevent escape of steam. These rings are capable of being adjusted by bolts passing through the side-plates *l l*, and are thus easily adjusted. The cranks *g g* are keyed on the shaft at right angles to each other, equi-distant from a line drawn through centre of shaft and centre of piston; these cranks convey the power to the lower cranks *i i* by rods or drag-links *h h*. The vibrating rods *f f* are carried

on the pedestal *j j*. The ends of the cylinder *a* do not require to be bored, as the whole wear takes place on the plates *d* and *e*. The plate *e*

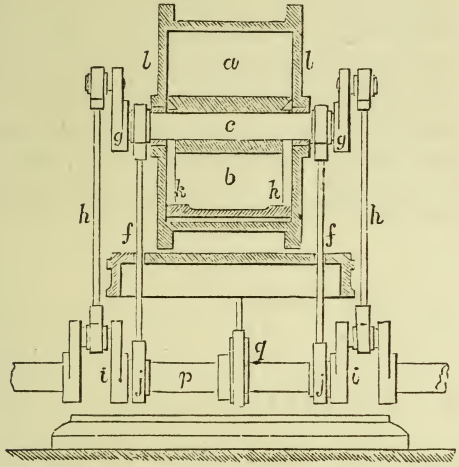

fig. 97.

is dovetailed in and fitted fast; *d* being loose on its parallel recess, which allows it to follow up the piston as it wears; the plate *d* is kept up to the face of the piston by springs behind it, or by admitting steam into the recess at the back of it. This plate serves another useful purpose; this is the prevention of priming in the cylinder: as the water increases in the cylinder, it forces back the plate, and rushes from one side of the piston until it escapes. Steam is admitted to act on the piston by means of a valve *n* through the steam-ports *m m*, open to the top and bottom of the piston alternately; the valve is worked by an eccentric *o* keyed on the crank-shaft *p*. This valve is on the equilibrium principle, and exhausts through the back, and works between two parallel planed surfaces; the wear that takes place being accommodated by a ring of metal *o*, similar to that employed for packing the piston. This form of engine is being employed in numerous instances, and with marked economical effect.

As the concluding portion of the present division of our treatise, we propose briefly describing the principles of action of the "disc-engine," which has been successfully introduced into practice.

The movement of the "disc-engine" is very peculiar; the most lucid exposition of its principle we have met with is that given by a "practical engineer," himself a well-known and able inventor, in the pages of the *Expositor*. We here append it: "The vessel in which the piston moves, the fixed recipient for the action of the steam, is the section of a hollow sphere, such as would remain after two equal opposite segments were cut off. In this is fitted the piston, called from its form and peculiar movement a disc. The centre of the disc coincides with that of the sphere; and as its diameter is equal to that of the inside of the sphere, it can have no direct movement like the common engine piston; but it may perform

an oscillatory motion, such as a top or a teetotum describes when their spinning force is nearly exhausted; that is to say, each point in the periphery successively dips; and the lowest point seems to proceed round the periphery, though there need not necessarily be (nor is there in this engine) any absolute rotation. Like a wave each point in the disc in its turn rises and falls; and like the wave also there is no onward motion. To understand the action more perfectly, we refer to the following diagram (fig. 98): *a a* is the spherical case we have described; *b* is the disc; and *c* a ball concentric with the axis *d*; *e f* are two conical covers; *g* is a crank into which the end of the axis *d* is inserted. If the crank be now turned round, it will be seen that every part of the disc *b* will successively be brought into contact with the cones at two opposite radial lines; but the



fig. 98.



fig. 99.

rotation of the axis of the crank need not necessarily cause the disc to perform any other than the oscillatory one we have described, and, as we have said, it cannot do so. There is a slot in the disc thus (fig. 99), and there is a partition in the engine extending from the outside to the ball and fitting the two cones. When we turn the two cranks, therefore, the oscillatory motion will be performed by the disc and axis, the side of the slot rubbing up and down on the surface of the partition." It is difficult to describe the way in which the disc receives the effort of the steam; but it may be sufficient to state, that the struggle or force of the steam to enter and escape, passing through an entrance made in one of the conical covers on one side of the partition to the exit-pipe placed on the other side of the partition, forces the disc partially round, and acting on the ball *c*, makes the lever *d* rise and fall in the direction of the arrows, and thus communicates motion to the crank *g*.

The first patent for the disc-engine was taken out by a Mr. Dakeyne in 1830. His engine was not, however, put in practice. Henry Davies was the next inventor who turned his attention to this engine. He took out three patents, each combining successive improvements in its action, his last patent being taken out in 1844, in which his improvements had reference to working the engine expansively. He introduced a variety of improvements in the details of this engine; indeed he may with all truth be termed its inventor. The disc-engine, as improved by Davies, was carried into practice pretty extensively, and a company was formed at

Birmingham to introduce it on a large scale. From some cause this company ceased soon to exist, and the disc-engine fell into comparative obscurity, until Mr. Bishopp, in 1844, introduced a variety of improvements, and, aided by the admirable mechanical resources of eminent engineering firms, he has succeeded in placing it in a comparatively high position among economical and compactly working engines.

CHAPTER V.

RAILWAY LOCOMOTION AND LOCOMOTIVE ENGINES.

PREVIOUS to describing the modern mechanism of the locomotive engine, so called *par excellence*, in contradistinction to the "steam-carriage for common roads," which properly is also entitled to the distinctive appellation of locomotive, we propose to give a rapid sketch of the history of its introduction, and a notice here and there of the most striking of the machines from time to time introduced, ending in the comparatively perfect machine now in daily use on our railways. We must premise, however, that the nature of our treatise does not permit us to go into the history of the introduction of railways, or an explanation of their construction; it is with the engine, its history and construction, that we have alone to deal. The subject of railways belongs more exclusively to the treatise on "civil and mechanical engineering," and which may hereafter be added to the series of works of which the present forms a part.

It is difficult to decide to whom the honour is due of having suggested the use of the steam-engine for the purpose of propelling carriages. Savery hints at its use in this way, at least he considered that it was possible to apply it. Dr. Robison, the gentleman who was the means of directing the attention of Watt to the steam-engine, "threw out the idea of applying the power of the steam-engine to the moving of wheel-carriages;" but other occupations withdrew his attention from the subject, and nothing further was effected by him. In the patent taken out by Watt in 1784, he described the application of the steam-engine to the propulsion of carriages. "The boiler of this apparatus he proposed should be made of *wooden staves* joined together, and fastened with iron hoops like a cask. The furnace to be of iron, and placed in the midst of the boiler, so as to be surrounded on every side with water. The boiler was to be placed on a carriage, the wheels of which were to receive their motion from a piston working in a cylinder; the reciprocating motion being converted into a rotatory one by toothed wheels revolving with a sun and planet motion, and producing the required velocity by a common series of wheels and pinions. By means of two systems of wheel-work differing in their proportion, he proposed to adapt the power of the machine to the varied resistance it might have to overcome from the state of the road. A carriage for *two* persons *might*, he thought, be moved with a cylinder of

seven inches in diameter, when the piston had a stroke of one foot, and made sixty strokes per minute. Watt, however, never built a steam-carriage." Such is the account given by one authority. Another, however, affirms that Watt did at least construct a model, of which we give a diagram in fig. 100, illustrative of its construction; and further states, that Messrs.

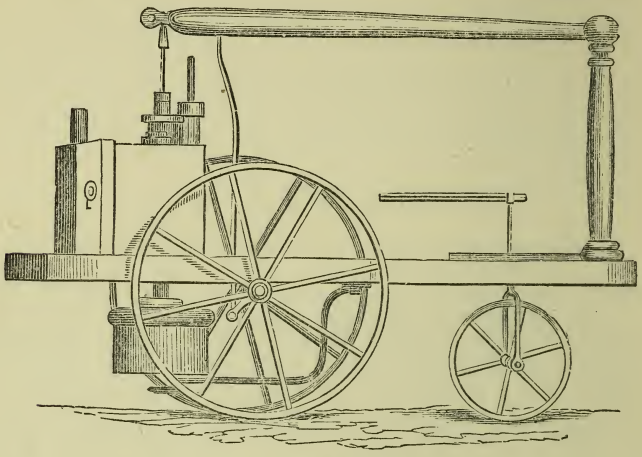

fig. 100.

Bolton and Watt constructed a steam-carriage, which was made to run on the roads of Cornwall in the years 1785-1786. We are, however, inclined to think that the model of the locomotive carriage, as here attributed to Watt, and which the writer states was made by Mr. Murdoch, Watt's assistant, was not only made by him, but owed its creation to the inventive genius of Murdoch himself. In a life or biographical sketch of Murdoch, read some two years ago at the Institution of Mechanical Engineers, it is there stated that Murdoch constructed the model of a steam-carriage, while residing at Redruth in Cornwall, and the details and general arrangement of which resembles very closely those in the diagram now given. Leaving this matter to be decided by more competent authorities, we hasten to the other points of the present division.

Another claimant for the honour of having introduced the first steam-carriage is the celebrated William Symington, the engineer now acknowledged by the majority of writers to be the first introducer of a practically-working steam-boat. As early as 1784 it occurred to him that steam might be applied to the propulsion of carriages. He commenced experiments with a view to perfect the idea; and in 1786 submitted to the inspection of the professors and other scientific gentlemen of Edinburgh a working model of a steam-carriage. This gave such proofs of practicability, that he was urged to carry the machine into practice. Such, however, were the difficulties to be overcome in this, that he conscientiously stated his scruples to those anxious to aid him in the matter, advising them not to proceed with it. In fig. 101 we give a lateral of the steam-carriage model as constructed by Symington; *d* the cylinder; *e*, boiler,

supplied from the condenser; *ff*, direction pulleys; *g*, condenser; *h*, steam-pipe; *i*, water-tank; *a*, drum fixed on the hind axle; *b*, tooth and ratchet wheels; *c*, rack-rods, one on each side of the drum, the alternate action of which upon the teeth and ratchet-wheels produces the rotatory motion.

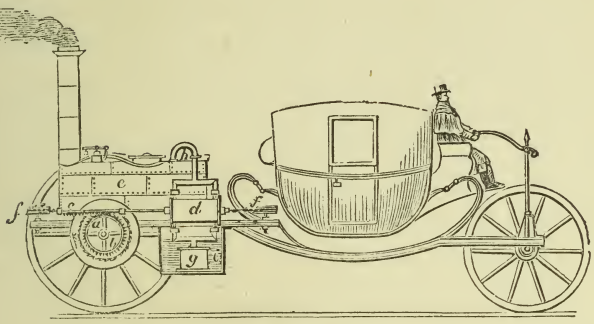

fig. 101.

In a previous chapter we described the high-pressure engine patented by Messrs. Trevethick and Vivian: in the patent they claimed its employment in "propelling wheel-carriages of every description." In 1804, Mr. Trevethick set an engine to work on a very indifferent railroad at Merthyr Tydvil Colliery, in Wales; this worked very satisfactorily, and up to 1830 or 1831 it was the form which, more or less modified, was working on the railroads on which steam was employed. The following is a description of this engine; the boiler is cylindrical, as *a a*, fig. 102;



fig. 102.

b is the fire-place; *e* the fire-door; *c* the entrance of the flue, which is turned before entering the chimney. By this arrangement the economy of fuel effected was very considerable, the greater portion of the heat being given out by the furnace and flue to the water surrounding them. The lower part of the cylinder was placed within the boiler, as at *d*, and the upper portion was surrounded by a jacket, in the space between which and the cylinder the steam from the boiler was allowed to circulate freely; the loss of steam from condensation was by this means obviated. The steam was admitted above and below the piston by the four-way cock already

described; and after working the piston, instead of passing it to the atmosphere, it was led by a pipe to the chimney. By this arrangement the draught of the furnace was greatly increased, and a convenient means established of getting rid of the waste steam. Had this plan been patented, the inventor would have probably reaped a golden harvest from it. This engine, on its first trial, in which the propulsion was effected by the adhesion of the wheels on the rails, drew ten tons of bar-iron, besides the carriages, for nine miles, at the rate of five miles an hour, without stopping, and carrying its heavy load of fuel and water.

We have now to notice the ingenious mechanism introduced to obviate an inconvenience in engine propulsion which only existed in imagination, namely—that the engine wheels would not "bite," but would slip round upon the rails. Space will not allow us to illustrate all the mechanisms introduced to obviate this imaginary difficulty; indeed, this, for the purposes of our treatise, is not at all necessary: we shall merely glance at the nature of a few of the most ingenious of these. Trevethick and Vivian, in their patent, claimed the plan of making, in *certain cases*, the external periphery of the driving-wheels "uneven, by projecting heads of nails, or bolts, or cross-grooves, or *fittings to railroads* when required; and that *in cases of hard pull* we cause a lever bolt, or claw, to project through the rim of one or both of the said wheels, so as to take a hold of the ground." But, so far from adopting these contrivances at all times and under all circumstances, as a means of overcoming the imaginary difficulty before alluded to, they on the contrary expressly stated, that "in general the ordinary structure or figure of the external surface of these (the driving) wheels will be found to answer the intended purpose."

In 1811 Mr. Blenkinsop patented "certain mechanical means, by which the conveyance of coals, minerals, and other articles is facilitated, and the expense attending the same rendered less than heretofore." In this arrangement, a rack or toothed rail was laid down along one side of the railway; into the teeth of this rack a large toothed-wheel worked, which received a circular motion from a steam-engine; the boiler and engine working this being supported by a frame on four wheels. By this means the engine was pulled along the rails, and was enabled to ascend gradients of considerable incline. The boiler was placed on a wooden or cast-iron frame; through the interior of the boiler a large tube was passed containing the furnace; this tube was continued through the other end, and bent upwards to form the chimney. Two cylinders were placed at the top of the boiler, and the pistons were connected by cross-heads and connecting-rods, *f*, *e*, fig. 103, to the cranks, *c*, *d*, fastened in the centre of two toothed wheels represented by dotted circles. These worked into a large toothed wheel placed in the inside of the cogged wheel *a*; the cogs in this working into the teeth or cogs placed along one side of the railway *b b*. The engine was long used on the Middleton Colliery Railway, near Leeds.



fig. 103.

We now approach the period at which two men appeared in the arena

of invention; men who, up to the period of their death, were intimately connected with railway mechanism, and who were destined, during long and active lives, to be the means of introducing improvements in this branch of engineering, so effective as to cause quite a revolution in the art of travelling; these men were the well-known George Stephenson and Timothy Hackworth. To the former we are indebted for the system of railways as now established; to the latter nearly all the improvements in the locomotive which formed it the powerful and effective machine we now see it, owed their origin. And in thus paying to Hackworth part of the tribute of praise which has hitherto been nearly always allotted to Stephenson, we by no means detract from the high praise due to the latter. Whatever may have been the improvements effected in the locomotive as a distinct mechanism, it never could have arrived at the height of its present efficiency as "a space and time annihilator," had not the improvements in the "iron way" been simultaneously effected. Without the improved system of rails introduced by Stephenson, the locomotive engine would have been comparatively useless; and without the speed attained by the improved locomotive, the improved system of rails would have been so commercially unremunerative as to have been altogether set aside. These were the elements of high velocity, "each of which formed the absolute condition of the existence of the other." "I am, I think, safe in saying," remarks Mr. Scott Russell, in his eulogium on George Stephenson, "that the wrought-iron railroad (Stephenson's) was essentially dependent on the locomotive engine. But that the modern locomotive engine could not subsist without the wrought-iron rail, and its multifarious appendages of chains, keys, locks, sleepers, switches, crossings, sidings, and turn-tables, is too evident to need proof. Without the smoothness of the rail, the engine would be jolted to pieces; and without the easy motion which it gives, the engine could not be made to draw a sufficiently-profitable load to pay; and further, unless made of wrought-iron, it would be impossible to attain the high speed of the locomotive without imminent danger. It therefore appears, that the continuous wrought-iron railway and the locomotive engine were inventions intimately related to each other, and each a condition of each other's success." Historical evidence, recently made public, proves, we think, very clearly, that to the inventive genius of Timothy Hackworth the locomotive engine owed nearly all the improvements which made it an efficient machine—improvements, too, effected at a time "when everything had to be learned—when, indeed, engineers were utterly thrown upon their own resources." Those who are desirous to enter into an investigation of the point, and to be made aware of the extent to which Stephenson was indebted to the ability and experience of Hackworth in locomotive mechanism, should read the article in the *Practical Mechanic's Journal*, p. 49, vol. iii. 1850-1, entitled "A Chapter in the History of Railway Locomotion;" and the "Memoir," p. 225, same volume. We think that an unprejudiced perusal of these interesting papers will induce the reader to coincide with the opinions of the writer as therein expressed. "If George Stephenson deserved the title of the 'Father of Railways,' we think we may at least claim for Timothy Hackworth that of the 'Father of Locomotives.'"

In 1814 George Stephenson constructed a locomotive, Lord Ravensworth, of the Killingworth Colliery, having assisted Stephenson with money to

conduct his experiments. This was tried on a tram-way at Killingworth. In 1815, in conjunction with another party, he took out a patent for "various improvements in locomotives." In this engine two cylinders were used, one at each end; the connecting-rods were attached to pins on a spoke of the wheels; they were placed at right angles to each other; by this means the motion was rendered continuous, one crank or pin receiving the full leverage of the connecting-rod, while the other was at its dead point. A toothed wheel was placed on each axle inside the wheels, and round the two wheels a peculiar kind of endless chain was stretched (see p. 50, *Mechanics and Mechanism*); this chain was so constructed as to furnish a series of rectangular apertures, into which the cogs in the toothed wheels entered; by this arrangement, as the wheels revolved the chain was passed along, and one wheel could not revolve without the other; the relative positions of the cranks or pins (namely at right angles) was thus preserved. In the year 1816 he took a patent, in conjunction with Mr. Losh, which embodied many of his notable improvements in the construction of railways. In this patent one claim having reference to the construction of locomotives was included.

Engines on this plan were introduced by Stephenson on the Killingworth and on the Hetton Colliery Railway; and although every exertion was made by him to render them efficient and economical, and to get them into use on the different railways which began at that time to be formed, it is the opinion of competent authorities that they did not possess "those advantages which the inventor had anticipated."

On the 27th of September, 1825, the Stockton and Darlington line of Railway, twenty-five miles long, was opened for public traffic. Twenty miles of this was worked by locomotives and horses, the powers of each being put thus in close competition. At this early period in the history of a line of railway, the first ever laid down on the improved principles as introduced by Stephenson, and which formed the nucleus of the railway system, the locomotives employed on it were five in number, four having been manufactured by Messrs. Stephenson at their factory at Newcastle, and one by Mr. Wilson of the same town. Such, however, was their inefficient working condition, that the power of steam was about to be abandoned, and horses alone employed. Timothy Hackworth, to whom we have before alluded, and who, through the intervention of George Stephenson, had been appointed manager of the working department of the railway, stepped forward at this critical juncture, and proposed to construct an engine capable of working the line to the extent already mentioned. His offer was accepted, and he forthwith began his operations, which were eminently successful, and contributed greatly to the rapid progression of steam locomotion.

We now approach that period in the history of steam locomotion at which the great impetus was given to the perfection of the locomotive engine. We allude to the opening of the Liverpool and Manchester Railway in 1830. In considering the means to be used for working the line, the choice of the directors lay between the employment of stationary steam-engines, and locomotives. It is unnecessary here to enter into detail as to the investigations which the company deemed requisite to be instituted in order to ascertain the most efficient and economical method of working the line; suffice it to state that, in opposition to the Report of the engi-

neers appointed to investigate the matter, Messrs. Rastrick and Walker, who recommended stationary engines, the directors ultimately resolved to adopt locomotive power; and offered, for the best engine, a prize of 550*l*., to be decided by a public competition. It is generally understood that the opinion of Robert Stephenson in favour of locomotives induced the directors to adopt this power; and it is nothing derogatory to the great fame of Robert Stephenson to state that it appears he was much indebted to Timothy Hackworth for a variety of sound practical information; indeed Hackworth was the only person at this period who had anything like a practical knowledge of the whole bearings of the case.

In offering the above reward for the best locomotive, the directors made the following stipulations; "the engine was to consume its own smoke; to be capable of drawing after it three times its own weight *at ten miles an hour*, and have not exceeding 50 lbs. pressure upon the square inch on the boiler; two safety-valves, one locked up; engine and boiler to be supported on springs, and rest on six wheels if it should exceed four and a half tons; height to top of chimney not more than fifteen feet; weight, including water in boiler, not to exceed six tons, but preferred if of less weight; boiler, &c.. proved to bear three times its working pressure, and pressure-gauge provided; cost of machine to be not more than 550*l*." The following is a description of the public trial of the competing engines: The "Rocket," constructed by George Stephenson, and of which we give a representation in fig. 104, weighed 4 tons 5 cwt.,

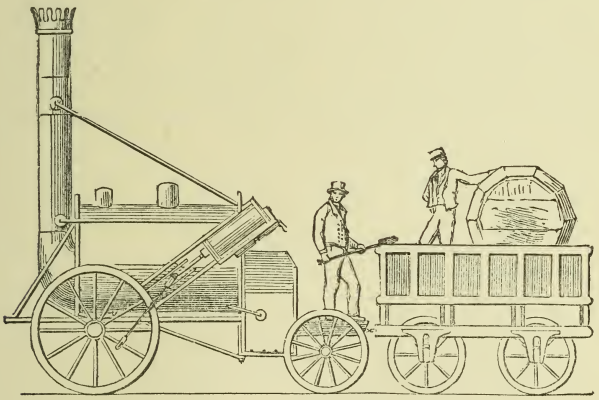

fig. 104.

and the tender, with water and coke, 3 tons 4 cwt. 2 lbs.; it had two loaded carriages attached, weighing 9 tons 10 cwt. 3 qrs. 20 lbs., thus making the whole weight to be moved equal to 17 tons. The velocity attained by this engine was 14 miles an hour, with an evaporation of 114 gallons per hour, and consumption of coke equal to 217 lbs. per hour. The greatest velocity attained was at the rate of $24\frac{1}{6}$ miles per hour. The "Sanspareil," by Timothy Hackworth, and of which we give a representation in fig. 105, was the next engine tried, although, from its not having been made in strict accordance with the specified rules, it was scarcely

competent to enter the lists of competition. The weight of the engine was 4 tons 15 cwt. 2 qrs; the tender and water and fuel being 3 tons 6 cwt. 3 qrs.; the loaded carriages, three in number, attached to it being equal to 10 tons 19 cwt. 3 qrs.; the whole weight to be moved being equal to 19 tons 2 cwt. The engine in her eighth trip became disabled



fig. 105.

through the feed-pump becoming disordered in its action, the level of the water in the boiler got low therefore, and the leaden plug, which was used as a safety-valve, getting melted, an end was thus put to the experiment. Her rate of speed was, however, satisfactory, being equal to conveying $19\frac{1}{2}$ tons at fifteen miles per hour. The greatest velocity attained was $22\frac{2}{3}$ miles per hour. The consumption of fuel was very great in this engine, being equal to 692 lbs. per hour; this was in consequence of the great draught induced by the steam-blast in the chimney.

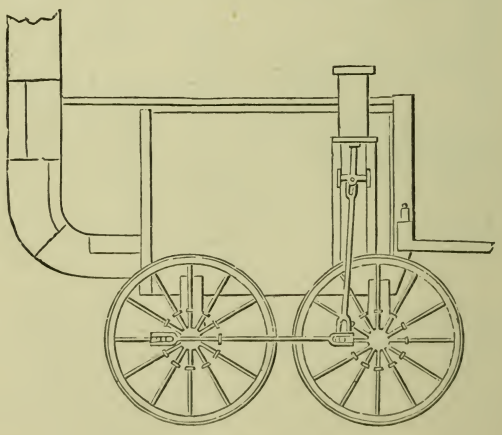

fig. 106.

The third engine, the "Novelty," by Messrs. Braithewaite and Erricson, and of which we give a representation in fig. 106, carried its

own water and fuel, and weighed 3 tons 1 cwt. The weight of the tank, water, and fuel being 16 cwt. 14 lbs.; the two loaded carriages being 6 tons 17 cwt.; the total weight being 10 tons 14 cwt. 14 lbs. In consequence of successive accidents in the working arrangements of this engine, it was withdrawn from competition; its performances, however, were very satisfactory so far as they went.

Another engine, named the "Perseverance," constructed by Mr. Burstall, was also entered for competition; but being unsuited to the railway, was at once withdrawn. The judges on this interesting occasion were Mr. Nicholas Wood, Mr. Rastrick, and Mr. Kennedy. The prize was awarded to Mr. Stephenson for his engine the "Rocket."

The "Rocket" undoubtedly owed its efficiency, at least in an economical point of view, from the construction of the boiler, and the large amount of surface which was presented to the action of the heated air. This was obtained by introducing twenty-five copper tubes, three inches diameter, into the interior of the boiler, at its lowest diameter; these tubes opened at one end into the space below the chimney, and at the other into what is now termed the fire-box; by this arrangement, the flame and heated air passed through the tubes, which were surrounded by the water in the boiler. The furnace or fire-place was an external box, about three feet deep and two wide; the furnace was provided with an external casing; into the space thus formed the water from the boiler passed: a large additional amount of heating-surface was also thus obtained. The boiler or flue-tubes—"which has since proved to be the main-stay of the modern locomotive"—was the invention of Mr. Henry Booth, the secretary of the railway; a gentleman "to whom railways are indebted for much of their practical efficiency." From the invention not having been patented, Mr. Booth did not receive the great pecuniary advantages which might otherwise have resulted from this highly valuable improvement. We understand, however, that he received a pecuniary reward from the directors of the railway on account of it. As will be seen on inspection of the diagram, the cylinders were placed outside the boiler, near the fire-box, and inclined at an angle; and the piston-rod of which is connected with the driving-wheel by means of a connecting-rod.

In the "Sanspareil" of Hackworth, the cylinders were inverted and placed vertically; the piston-rod cross-head worked between parallel guides; and to the cross-head was attached the connecting-rod which communicated motion to the hind wheels; the fore and hind wheels were coupled by a connecting-rod. The boiler was cylindrical, with the flue returned to the front, where it entered the chimney; the flue was of course entirely surrounded with water.

The "Novelty" possessed some arrangements of considerable merit, the most distinguished feature being the construction of the boiler and fire-place. This will be seen by an inspection of the diagram in fig. 107: *d* is the furnace placed inside the boiler, and surrounded with water; fuel is supplied to the fire-place *c* by the tube or funnel *e*, passing through the dome of the boiler, and covered with a lid or cap. Air is forced into the fire, to maintain combustion, by a small pair of fanners worked by the engine, through the pipe *b* communicating with the ash-pit *c*. The heated air is forced along the series of pipes *f g* to the chimney *h*, the steam space being at *i i*. By this arrangement a large amount of heated

surface is obtained; the fire-place not only being surrounded with water, but the long range of pipes *f g*. The peculiar arrangements of the engine will be seen by the diagram in fig. 106. Mr. Stephenson not only obtained the prize, but the appointment of engine-manufacturer to the company. The attention of the firm was now devoted to perfect the

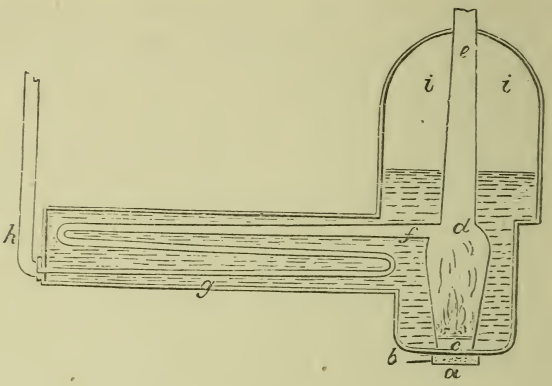

fig. 107.

mechanism of the locomotive. "Each engine that issued month by month from the factory was an improvement on its predecessors, and the fourteen and twenty miles of the 'Rocket' were raised to sixty and seventy miles; and the Newcastle factory became the largest and most famous in the world." Other manufacturers entered the field of competition, and the vast amount of ingenuity and practical experience brought to bear on the mechanism of the locomotive by such eminent firms as those of Hawthorn and Company; Sharp, Roberts, and Company; Bury, Curtis, and Kennedy; and last, though not by any means least, of Timothy Hackworth, soon resulted in bringing the locomotive engine to its present high state of perfection.

We now proceed to give illustrations of locomotive engines, showing the majority of the improved arrangements as now introduced. It is impossible to notice the whole details so fully as we should wish in a short treatise like the present; we hope, however, that the illustrations we give will enable the reader pretty clearly to understand the arrangements and operation of this beautiful machine.

For the purposes of description, we shall divide the locomotive into two parts:—the fire-box, smoke-box, and boiler; and the moving parts of the engine which give motion to the whole.

The fire-box, as may be seen by inspection of the longitudinal sections of engines hereafter given at *c c c c*, fig. 116, is inclosed on all sides except the bottom; at this part the fire-bars are placed on which the fuel rests; and at the side next the funnel or chimney, this side is pierced with holes, into which are passed the smoke-tubes *d d*. To prevent the dispersion of the red-hot ashes from the fire, a plate-iron tray or receptacle is placed beneath the fire-bars. Fire-boxes are of two kinds, square and round, as

in figs. 116, 118. The round top is recommended by some, as being best calculated to withstand the pressure of the steam. In both methods of construction, however, it is imperatively essential to strengthen the parts by numerous stays or bolts. The fire-box door (see longitudinal sections) is double, to prevent loss of heat; and the outer and inner boxes, between which the water of the boiler is allowed to flow, are here joined. The fire-bars are placed loosely in a frame, so as easily to be lifted out when required to be renewed. In some instances the fire-bar frame is suspended by catches; when these are withdrawn the fire-bars and fuel above them are precipitated into the ash-tray.

The smoke-tubes are generally made of brass, but malleable iron ones are now becoming largely used. The number of tubes in each engine varies from 96 or thereabouts to 134. Great care is necessary to fit the tubes into the fire-box end, and also that of the smoke-box. They must be fitted water-tight. The diameter of the tubes is generally about one inch and a half. The communication between the fire-box at one end and the smoke-box *s s*, figs. 116, 118, is kept up entirely by means of the smoke-tubes *d d*. This is formed of plates of iron of the same shape externally as the fire-box. Access is had to the interior of the smoke-box by a door at the front of the engine. This is made in various ways. In some instances it is hinged at bottom and opens downwards; in others it is in two leaves, like ordinary folding-doors. The smoke-tubes pass through the side of the smoke-box nearest the fire-box. The cylinders are in many instances placed inside the smoke-box. By this arrangement the loss by radiation and condensation of steam is avoided. The steam, after working the cylinder, is ejected up the chimney through the blast-pipe *h*, fig. 116, and *e e*, fig. 118. The diameter of chimney is about 13 inches, and the height is limited to about 7 feet above the boiler, to allow it to pass under the railway bridges.

The fire is moderated by a damper placed in the chimney. This is generally made of the "throttle-valve" species, being a plain disc, *a a*, fig. 108, turning on an axis *d* somewhat out of the centre. It is pro-



fig. 108.



fig. 109.

vided with an aperture through which the end of the blast-pipe passes when the damper is wholly shut, the end of the blast-pipe projecting above it. The damper is moved by the lever *e*, actuated on by a long lever under the control of the engine-man. This lever is furnished with three slots, which take into a rest. According as the lever rests on either of the slots, so is the opening of the damper regulated. The

upper orifice of the chimney is sometimes covered with a wire-netting. This is in order to arrest the sparks. This contrivance is, however, fast falling into disuse, and a perforated iron plate is placed below the blast in the smoke-box. In American locomotives, where wood is extensively used for firing, a "spark arrester" is adopted; this gives a degree of size to the chimney unusual in locomotives in this country. This will be described hereafter.

The water is supplied to the boiler by means of a small force-pump, placed under the boiler and near the fire-box. This pump is worked by a lever from one of the engine eccentrics. In some instances the pump is worked from the piston cross-head. The water is drawn from the tank in the tender, through a pipe properly coupled, by a ball-and-socket joint, at the part where the engine is attached to the tender; and the water is delivered to the boiler in some instances at the smoke-box end, a little below the water-level; at others near the fire-box, and in others again near the centre part of the boiler.

There are various appliances connected with the boiler. The safety-valve is generally placed above the fire-box, as in figs. 116, 118, and is pressed down by a lever, the pressure being regulated by a spring balance. The nature of the arrangements of this kind of valve is explained at p. 45, fig. 66, *Mechanics and Mechanism*.

Lock-up safety-valves are falling into disuse, as, from not being easily got at, they are apt to stick in the seat and become inoperative. In some engines a valve, as shown in fig. 109, is used. This is loaded a little above the usual pressure; this being obtained by the bent springs forcing down the valve into its seat.

The contrivance known as the steam-whistle is placed on the dome or top of the fire-box. This is shown at *b*, fig. 110. The peculiar noise



fig. 110.



fig. 111.

elicited is caused by the steam rushing up the tube *b b* connected with the boiler, and the admission to which is regulated by a cock actuated upon by a handle or lever within reach of the engine-man. The steam passes through the apertures *c c*, and out at *d d*, and strikes the thin edge *e e* of

the circular cup *f*, producing the sound so well known now-a-days in almost every district of the kingdom.

The level of the water in the boiler is ascertained by gauge-cocks, which are placed at different heights to indicate different levels at which the water stands. In addition, a glass water-gauge is attached to the front casing. The arrangement of this apparatus is shown in fig. 111. The tubes *c c* are in communication with the interior of the boiler. A strong glass tube *b b* connects the two tubes *c c*. The upper tube *c* communicates with the part of the boiler which should contain steam, the lower with that containing water. On opening the upper and lower handles *a a*, the water rises in the glass-tube to the same height as in the inside of the boiler. The oscillations of the water which would take place in the tube *b b*, from the rapid movement of the engine, is in some measure prevented by making the communication between the boiler and tube of a small size. A small cock, as *f*, is placed at the bottom tube, to clear the tube of its accumulated water. Entrance is obtained to the interior of the boiler by means of a man-hole door of similar construction to that described in another and preceding chapter.

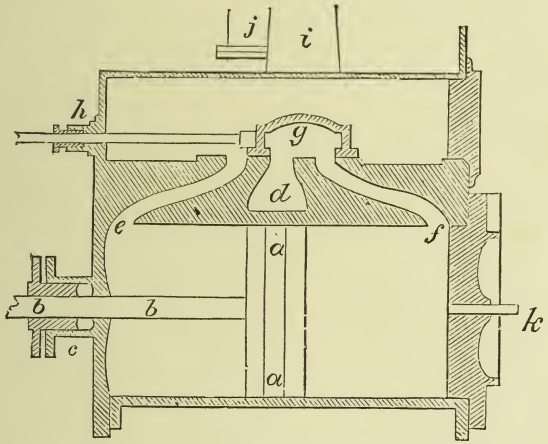

fig. 112.

The cylinders of locomotive engines are always of the three-ported species, as in fig. 112. *a a* the piston; *b* the piston-rod; *c* the stuffing-box; *d* the exhaust-port, leading to the exhaust-pipe *i*; *g* the valve; *h* valve-rod; *e* port to upper side of piston; *f* port to under side; *k* cleansing and greasing-cock. Cocks are supplied to cylinders in some instances at top and bottom of cylinder. These are opened when required by levers within reach of the engine-man, to allow the water collected in the cylinders from priming and condensation. The steam is passed from the boiler to the cylinders by a pipe, the entrance to which is at the upper part of a cylindrical vessel



fig. 113.

o N, fig. 116, or within the dome. Above the fire-box, as in fig. 118, the entrance to the pipe is placed thus far above the water to prevent priming as much as possible. The supply of steam to the cylinder is regulated by what is termed a "regulator." Various contrivances for this purpose are adopted. Fig. 113 explains a form much introduced. Two circular discs work in contact, one of which is fixed, and the other is made to revolve by a lever connected with it, and actuated on by another lever or handle outside the casing. Apertures are made in both discs to correspond with each other in shape and position. When the apertures in both plates coincide, a free passage is given to the steam; but when the movable disc is turned round, so as to present the solid parts of its face opposite the apertures in the fixed disc, the entrance for the steam is lessened in proportion as the apertures in the fixed disc are closed. The discs are fixed on the entrance to the pipe which passes the steam to the cylinders.

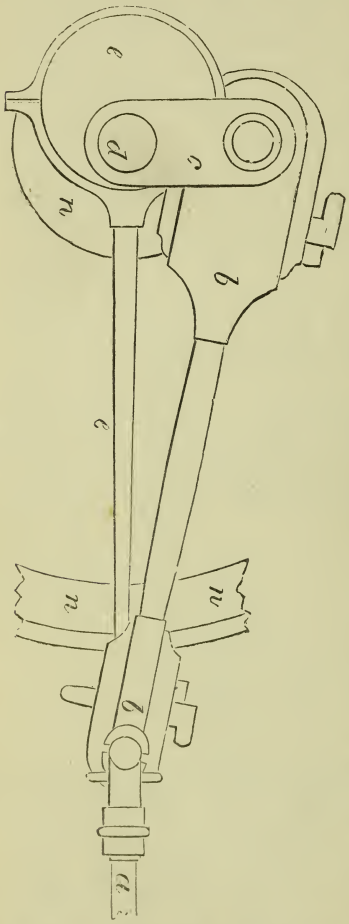

fig 114.

The reciprocating motion of the piston-rod is changed into the circular one of the driving-wheel by means of a connecting-rod, as in fig. 114: *a* is the piston-road; *b* the connecting-rod, the brasses of which embrace the cranked axle of the driving-wheels *n n*, as explained in p. 87, fig. 169, *Mechanics and Mechanism*. The cranks are placed at right angles to each other, so that the motion is continuous. The slide-valves for the cylinder for admitting the steam to both sides of the piston are worked by eccentrics, as explained in p. 82, *Mechanics and Mechanism*, the position of which is shown in fig. 114.

In order to work the engine backwards or forwards as desired, various ingenious arrangements have been introduced: it will suffice for our purpose to describe one of these, and that the most generally adopted. It is known as the "link-motion," and owes its invention to Mr. Stephenson. The movements are effected by four eccentrics, two to give the backward, two the forward motion of the engine; two eccentrics to each cylinder. Let *b c*, fig. 115, be the two eccentric-rods, *b* the backing eccentric, and *c* the forward eccentric. These are connected to the curved link *a a*, the radius of which is equal to that of a circle described by each

eccentric-rod revolving round the centre of its eccentric. The backward and forward eccentric-rods are attached to the extremities of the links. The valve-rod which works the side-valve of the cylinder is provided with a piece of metal which slides between the grooves made in the interior faces of the links. The links are kept at a proper distance apart by bolts. The links are capable of being lifted up by means of the lever *g*, and connecting piece *f*. When the slide-valve is out of gear, the eccentric-rods

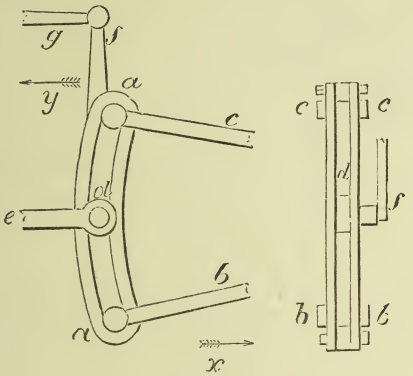

fig. 115.

are in the position shown in the diagram, the line of valve-rod bisecting the angle formed by the eccentric-rods. In this case, if the engine is in motion, as just in pulling up at a station, the eccentric-rods merely make the link oscillate or vibrate in the centre of the valve-spindle, in and out alternately, as shown by the arrows *x y*. But if the valve is required to make the engine go ahead, or forward, the link is raised up by means of the handle *g*, until the forward eccentric-rod *b* is in a line with the valve-rod; and by this means the throw of the eccentric will be communicated to the valve-rod, and the engine will go forward. To reverse the engine, all that is necessary is to lower the links until the upper eccentric-rod *c* is placed in a line with the valve-rod, when the engine moves backward.

Having sufficiently, for the elementary purposes of our treatise, given the details of the locomotive, we now proceed to give illustrations of engines, showing the connection of the various parts. The first we give is the longitudinal section of a "fast passenger-engine," constructed by Mr. Hackworth; and for the drawing of which, and description, we are indebted to Mr. W. Johnson, fig. 116. She has been expressly designed for fast passenger-trains, having driving-wheels 6 feet 6 inches diameter, with leading and hind wheels of 4 feet diameter. Her weight, in working order, is 23 tons, 15 cwt., and this is distributed in the following manner: on leading wheels, 8 tons 6 cwt.; drivers, 11 tons 4 cwt.; and hind wheels, 4 tons 5 cwt.

The fire-box is at *c c*, the smoke-tubes at *d d*, the balanced spring safety-valve at *a a a'*; *b* the steam-whistle; *s s* the smoke-box; *h* the blast-pipe; *m* the chimney; *e e* the regulator; *c* the regulator-handle; *n* the pipe

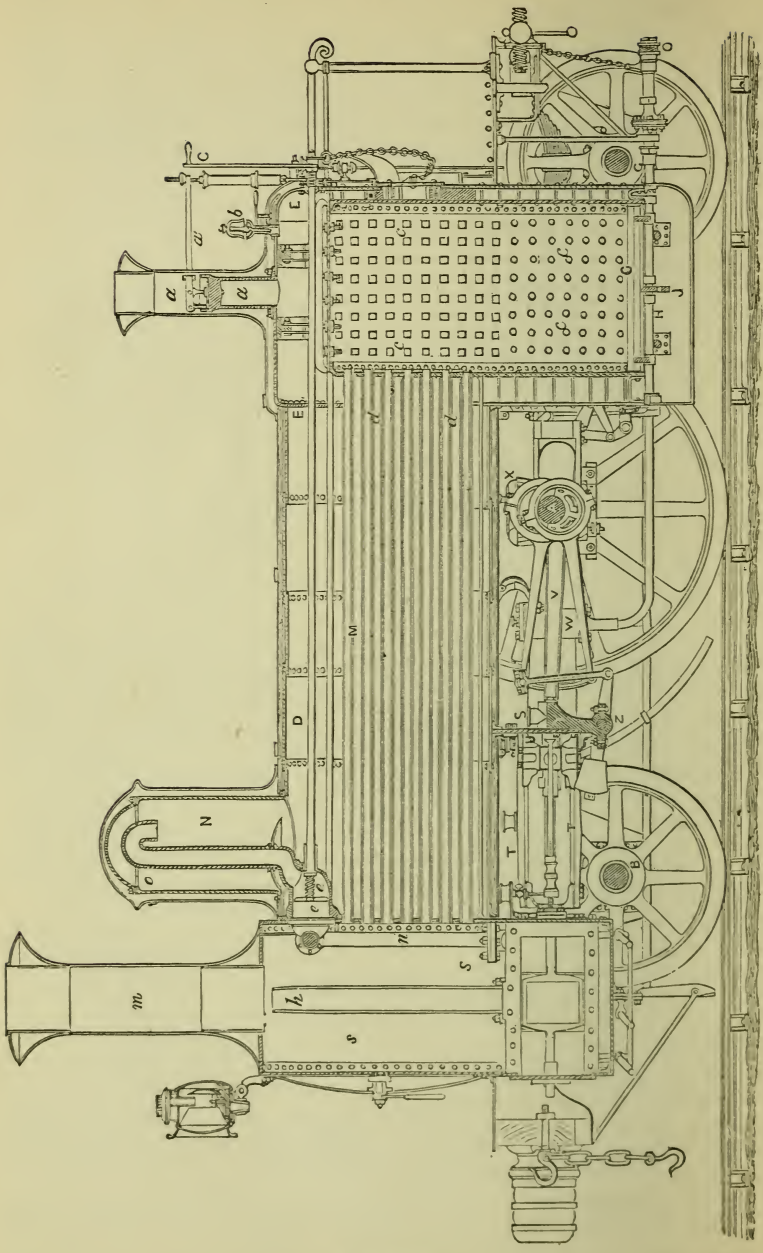

fig. 116.

supplying steam to one cylinder; *o* the feed-pipe to supply boiler with water from tank in tender.

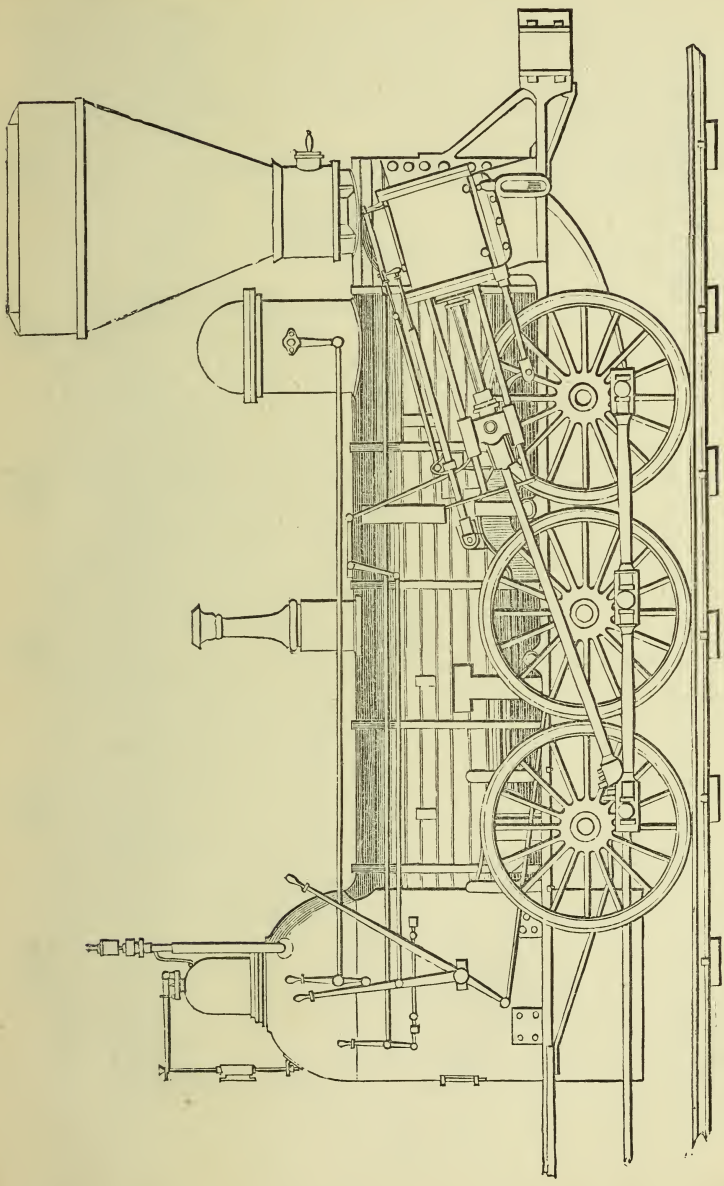

fig. 117.

In fig. 117 we give the elevation of an American locomotive, with out-

side cylinders; and in fig. 118 a longitudinal section of the same: *c c* the fire-box; *d d* the flue-tubes; *s s* the smoke-box; *e e* the conical blast-

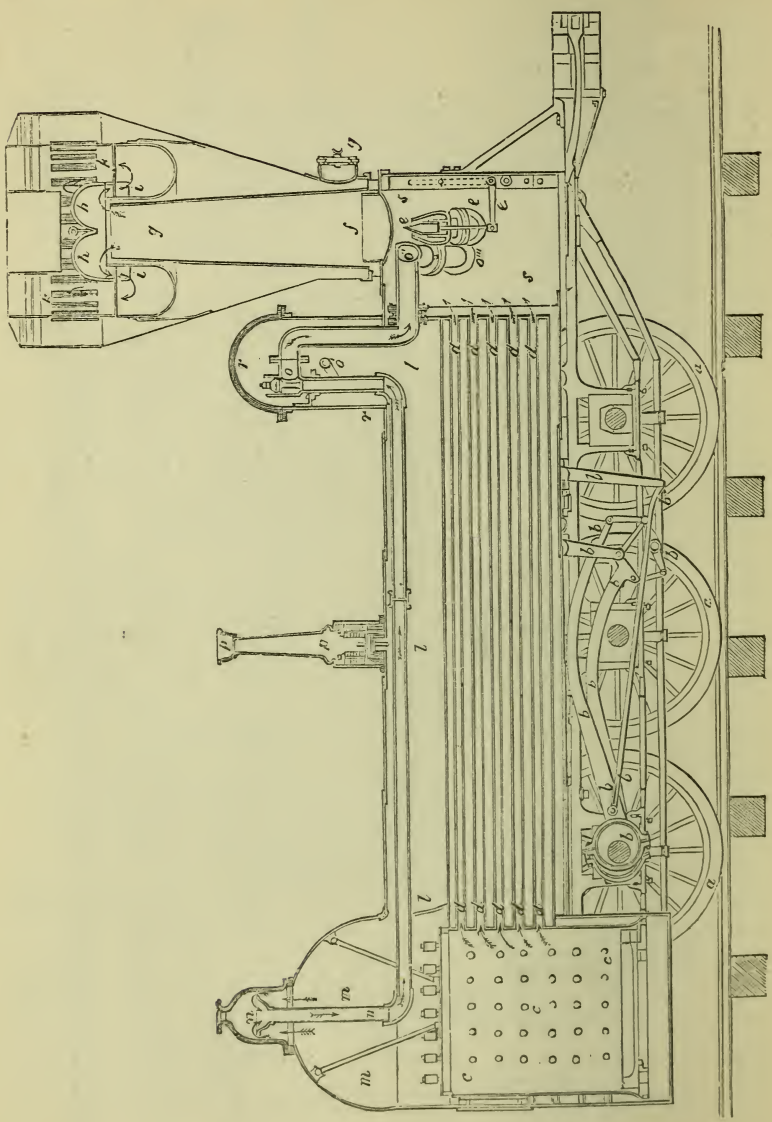

fig. 118.

pipe, the opening of which is regulated by the levers as in the drawing; *m m* the steam-dome, *n n* the steam-pipe; *r r* the regulator dome; *o* the

regulator, consisting of a spindle-valve, actuated on by the lever *o'*, admitting steam to the cylinder through the pipe *o" o"*; *l l* the steam space above the tubes; *p p* the lock-up spring safety-valve; *f g* the funnel; *i i*, *h h*, *k k*, the "spark-arrester." The curved arrows show the direction of the heated air; the sparks being deposited in the curved vessels *i i*, the heated air and steam passing out at the vertical apertures *k k*. The eccentric-rods and gear for working the valves, &c. are shown at *b b*.

CHAPTER VI.

STEAM-NAVIGATION AND THE MARINE ENGINE.

UNDER the present division of our treatise we propose to give a few historical notes as to the introduction of the steam-engine for the purposes of navigation, preliminary to the illustrations and descriptions of the modern "marine engine." From the limited space now at our disposal, we shall be prevented from going so deeply into the historical details as might, by some, be considered necessary; but we shall nevertheless endeavour to notice their most important features.

For many years previous to the application of the steam-engine to the propelling of boats, the substitution of sundry mechanical contrivances for sails had been a favourite object with mechanics. The most noticeable of these was the revolving wheel with float-boards on its periphery: this, modified somewhat in its arrangements and construction, is identical in principle with the "paddle-wheel" of the modern steam-boat. The various contrivances introduced for boat-propulsion were actuated either by manual labour or that of horses, through the intervention of simple mechanical arrangements. The earliest notice we have of an attempt to substitute the power of steam for these methods of working is that of Blasco de Garay, to whose invention we have already alluded in the first chapter. Captain Savery, in the *Miner's Friend*, alluded to the capability of steam as a power for moving steam-boats: but it does not appear that he entered further into the matter than making a mere suggestion. Denis Papin, during his residence in England, is said to have constructed a model by which a steam-piston moving in a cylinder gave motion to the axle of the paddle-wheels; a rack was placed on the piston-rod, working into a pinion fastened on the axle of the revolving paddles. He employed two or three steam-cylinders; and when the piston of the one was ascending, that of the other was descending; and as they would give contrary motions, one was detached while the other was in action; and by this means the motion could be made continuous and tolerably regular.

In 1737 Jonathan Hall published "a description and draught of a new-invented machine for carrying vessels or ships out of or into any harbour,

port, or river, against wind or tide, or in a calm." In this steam-boat the engine used was an atmospheric one, rotatory motion being obtained by a continuous arrangement of pulleys and cords or bands. We give in fig. 123 a diagram illustrative of the general appearance of this boat. From the imperfect mechanical arrangements, and the defects of the atmospheric as a rotative engine, this attempt at steam-boat propulsion was soon abandoned, if indeed it ever went beyond a mere speculation on paper.

Passing over various unsuccessful attempts made in America by Fitch and Ramsay, in 1785-1793; the Earl of Stanhope in England, 1795; and of the Chancellor Livingstone and the celebrated Brunel on the Hudson in America, in 1797,—we proceed to notice the first successful steam-engine. We must, however, go back for a few years prior to the last-mentioned date. In 1787, Mr. Patrick Miller, of Dalswinton, a gentleman who devoted much of his time to experiments in the improvement of artil-

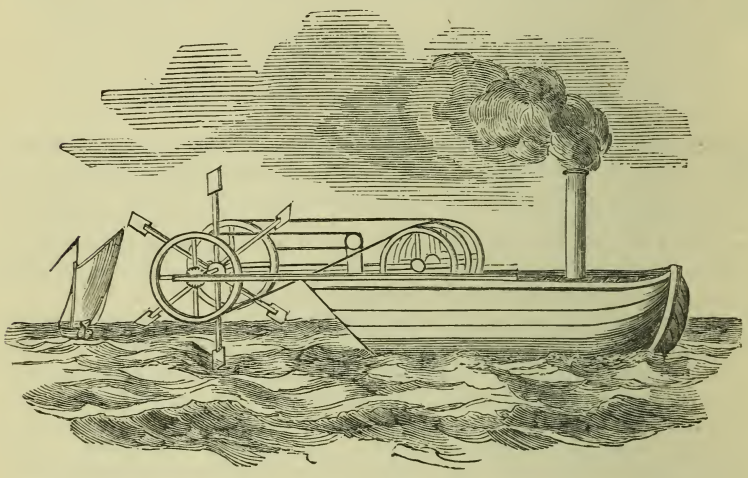

fig. 119.

lery and naval architecture, published a description, with drawings, of a "triple vessel moved with wheels." Convinced that, to give his invention every fair chance, it was necessary to employ some force greater than that of manual labour, he threw out a suggestion to employ the steam-engine for the purpose of moving the wheels; the force of steam, amidst other means proposed, presented itself, however, to his mind "as at once the most potent, the most certain, and the most manageable." "In Miller's family," says his son, in the narrative published in the *Edinburgh Philosophical Journal* in 1824, "there was at this time, as tutor to his youngest children, Mr. James Taylor, who had bestowed much attention on the steam-engine, and who was in the custom of assisting Miller in his experiments on naval architecture and the sailing of boats. One day, in the very heat of a keen and breathless contest in which they were engaged with a boat on the Leith establishment, this individual called out to his patron, 'that they only wanted the assistance of a steam-engine to beat

their opponents; for the power of the wheels did not move the boat more than five miles an hour. This was not lost on Miller, and it led to many discussions on the subject; and it was under a very confident belief in its success that the allusion was made to it in the book already mentioned. In making his first experiments, Miller deemed it advisable in every point of view to begin upon a small scale, yet a scale quite sufficient to determine the problem which it was his object to solve. He had constructed a very handsome double vessel with wheels, to be used as a pleasure-boat on his lake at Dalswinton; and in this little vessel he resolved to try the application of steam." To aid him in the fitting up of the steam-engine, he secured the services of an engineer to whom he was introduced by Taylor, one whose name will be handed down to posterity as the engineer to whom practical steam-navigation is mainly indebted for its introduction,—William Symington. It was to this latter individual, an engineer of great practical attainments, that the task of fitting up the steam-engine was intrusted. In the autumn of the same year in which he was employed, the steam-engine, having brass cylinders of four inches diameter, was placed on board the little pleasure-boat. "Nothing," says Mr. Miller in his narrative, "could be more gratifying or complete than the success of this first trial;" and while for several weeks it continued to delight Miller and his numerous visitors, it afforded him the fullest assurance of the justness of his own anticipation of the possibility of applying to the propulsion of his vessels the unlimitable power of steam. On the approach of winter, the apparatus was removed from the boat, and placed as a sort of trophy in his library at Dalswinton, and is still preserved by his family, as a monument of the earliest instance of actual navigation by steam in Great Britain. In the succeeding year, a larger boat, sixty feet long, was tried on the Forth and Clyde Canal; the engines and machinery were constructed at the Carron Iron Works, near Falkirk; and in December, 1789,

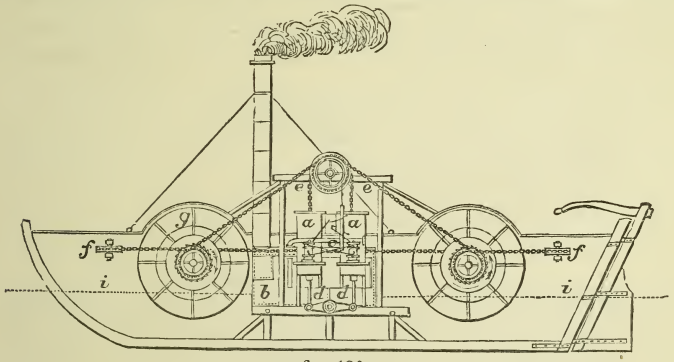

fig. 120.

"in the presence of a vast number of spectators, the machinery was put in motion." This second trial promised to be every way as prosperous as the first. It happened unluckily, however, that the revolving paddles had not been made of sufficient strength; and when they were brought into full action, several of the float-boards were carried away, and a very vexatious stop was for that day put to the voyage. The damage was repaired, and

on the 25th December the steam-boat was again put in motion, and carried along the canal at the rate of seven miles an hour, without any untoward accident; although it appeared evident that the weight of the engine was an over-burden for the vessel (her planking being only three-quarters of an inch thick), and that under such a strain it would have been imprudent to venture to sea. The experiment, however, was again repeated on the two following days; and having thus satisfied himself (Miller) of the practicability of his scheme, he gave orders for unshipping the apparatus, and laying it up in the storehouses of the Carron Works." In consequence, as it appears from the statements in the narrative by his son, Miller was led to abandon further experiments, partly from the large expenses which the first trial had cost him, and partly from his attention becoming much directed to agricultural pursuits. In 1801, Symington, patronised by Lord Dundas of Kerse, started a steam-boat on the Forth and Clyde Canal, for the purpose of towing boats.

In fig. 120 we give a drawing of Symington's first engine, and in fig. 121 a drawing of the second and improved design; for these we are indebted to the courtesy of Mr. William Symington, of London, the son of the inventor. The following is the description of the various parts :—

In fig. 120, *a a* are the cylinders, *b* the boiler, *c* steam-pipe, *d d* air-pump rods, *e e* connecting-chains, *f f* direction-pulleys, *g g* paddle-wheels, situated and wrought in a trough extending from stem to stern of the boat, and allowing free ingress and egress to the water; *h h* ratchet-wheels, for communicating motion to the paddles; *i i* the water-line.

In fig. 121, *a* the cylinder, *b* the boiler, *c* steam-pipe, *d* eduction-pipe, *e* condenser and air-pump, *g* hand-gear and pump-rod, *h* piston and connecting-rod, supported by the friction-wheels; *i* the rod which communicates motion to the air-pump lever; *j* crank; *k* paddle-wheel, situated in a cavity in the centre of the stern of the vessel; *l l* paddle-wheel cavity, open behind and below to the water; *m* steer-wheel; *n n* flotation-line. This boat was steered by two rudders connected by iron rods, and wrought in the prow by the steer-wheel.

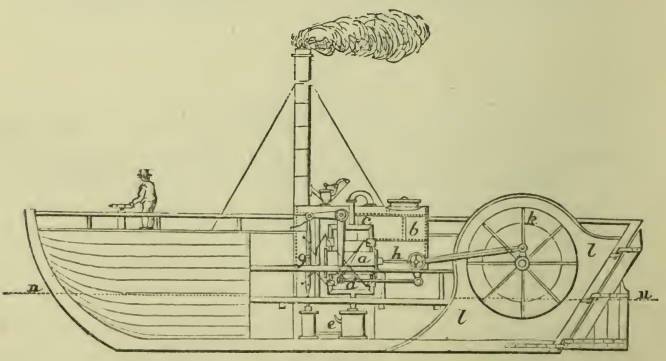

fig 121.

We come now to notice the exertions of another individual who occupies an important place in the history of steam-navigation — Robert Fulton, an American. Passing over various matters connected with this

individual, with reference to other inventions of his, we proceed at once to state that, on the occasion of his visit to Paris, he became acquainted with Chancellor Livingstone, then minister from the United States to the court of France; who, it may be recollected, has been mentioned as having been engaged in conducting steam-boat experiments at one period in America, but who had not succeeded. He explained to Fulton what had been done, informed him that on his return to America he intended to resume his experiments, and invited Fulton to turn his attention to the subject. This Fulton did, and instituted a variety of experiments with a view to ascertain the best expedients to be adopted. After many trials, he determined to use the paddle-wheel. In 1803, the first boat constructed by Livingstone and Fulton was completed; "the wheels and other mechanism acted according to his (Fulton's) expectations, although her speed was not so great as he calculated upon her machinery producing." So satisfied, however, were they with this preliminary trial, that they wrote to Boulton and Watt, ordering them to make an engine, with modifications adapted for the peculiar purpose for which it was designed; this engine to be sent to New York, to which place Fulton intended immediately to return. Livingstone, through the influence of his friends in America, obtained the privilege of navigating the waters of the State of New York by steam for twenty years, in which privilege Fulton was also included. Before leaving for New York, Fulton visited Scotland, and waited on Symington, who, as it appears from Symington's own narrative, explained to him very fully the whole details of his plan. Provided with practical information from Symington, Fulton proceeded to America in 1806; and in 1807 Fulton had completed his steam-boat, and in the spring of that year it was launched on the Hudson. The steam-engine manufactured by Boulton and Watt had arrived; and, with the assistance of the engineers who had been sent out with it, it was fitted up in the boat; and in August of the same year the first trial was made. On this occasion, Livingstone and Fulton had invited many of their friends to witness the progress of the first steam-boat.

The speed attained was about five miles an hour. She was ultimately placed as a passenger-boat between the above places, and succeeded so admirably as to place Fulton very speedily in a position of independence. The dimensions of the "Clermont" were, length 133 feet, depth 7 feet, breadth of beam 18 feet. The diameter of cylinder was 3 feet, stroke 4 feet; the diameter of paddle-wheels 15 feet; the float or bucket 4 feet long, and dropped 2 feet into the water. The burden was 160 tons; the boiler was 20 feet long, 7 deep, and 8 broad.

In the year 1808, a steam-boat called the "Comet" was tried on the river Clyde, in Scotland, by Mr. Henry Bell, a name deserving of honourable mention in the history of steam-navigation, as one who, by his persevering exertions, was a great instrument in bringing steam-vessels into use in this country. The attention of Bell, it appears, was directed to steam-boat propulsion by receiving a letter from Fulton. Whether this letter was written anterior to the starting of the "Clermont" is not known.

"Fulton," says Bell, "had occasion to write me about some plans of machinery in this country, and begged the favour of me to call on Mr. Miller, of Dalswinton, and see how he had succeeded in his steam-boat scheme; and if it answered the end, I was to send him a drawing and

full description of it, along with my machinery. This led me to have a conversation with Mr. Miller, and he gave me every information I could wish for at the time. I told him where, in my opinion, he had erred, or was misled by his engineer; and at the same time I told him that I intended to give Fulton my opinion on steam-boats. Two years after I had a letter from Fulton, letting me know that he had constructed a steam-boat from the different drawings of machinery that I had sent out, which was likely to answer the end, but required some improvement upon it."

Bell, as stated by Symington, frequently investigated the steam-boat constructed by the latter, while laid up in the creek of the canal formerly alluded to; and was led, after receipt of Fulton's letter, "to think of the absurdity of sending his opinion on these matters to other countries, and not putting them in practice himself in his own." From these considerations, he says, "I was roused to set on foot a steam-boat, for which I had made a number of different models before I was satisfied. When I was convinced they would answer the end, I contracted with a ship-builder in Greenock to build me a steam-vessel according to my plans, with a 40-feet keel and a 10½-feet beam, which I fitted up with a small portable engine having the power of three horses, and paddles, and called her the 'Comet,' because she was built and finished the same year that a comet appeared in the north-west of Scotland." The "Comet" plied between Glasgow and Greenock, but was by no means a successful speculation for Bell. For the first six months very few, he says, "would venture their precious lives in her; but in the course of the winter of 1812, as she had plied all the year, she began to gain credit, as passengers were carried twenty-four miles as quick as by the coaches, and at a third of the expense, besides being warm and comfortable. But even after all, I was a great loser that year. In the second year I made her a jaunting-boat all over the coasts of England, Ireland, and Scotland, to show the public the advantage of steam-boat navigation over the other mode of sailing; having done what no king, prince, admiral, or general could do —make vessels go against both wind and tide, which had not before been accomplished in this country so as to make them of any use to the country."

A monument is erected on the banks of the Clyde in honour of Bell, as the father of public steam-navigation in this country. Bell having thus led the way, station after station throughout the kingdom was supplied with a steam-boat. At the end of 1823 ninety steam-boats were built in Scotland.

The opinion of nautical men during the first few years of the introduction of steam-boats was inimical to the idea that steamers were calculated to make progress against a heavy sea. This question was, however, set at rest, and decided triumphantly in their favour, by the deep-sea voyage undertaken by Dodd, who went to Glasgow for the express purpose of taking a steam-boat from that port up to London. The vessel he navigated was "90 feet long and 14½ feet broad, with a burden of about 75 tons; the engine was calculated to have a power of 14 horses, and the wheels were 9 feet in diameter. She was rigged with a square sail on the chimney mast, a bowsprit sail, and another on the mainmast. The crew consisted of a mate, four seamen of the first order, an engineer, a furnace-man, and a ship's boy. This was the first vessel of the kind

that any one had ever dared to venture in on the tempestuous sea that terminates St. George's Channel on doubling Cape Lizard. . . . . This interesting voyage, 758 nautical miles, was run in 122 hours."

The bold experiments of Napier, too, tended to hasten the application of steam-boats to deep-sea navigation.

On fully considering the various claims put forward by different individuals as being the introducer of steam-navigation, we clearly think that the honour should be paid to William Symington, as being the first contriver of a *steam-boat* which was carried out into successful practice. The claims both of Henry Bell and Fulton are now, by the generality of authorities, set aside, and the high honour is left to be divided among Miller, Taylor, and Symington. What share Miller had in introducing the invention we have already shown; he played the part—and an important one, doubtless—of the capitalist who found the means to conduct the experiment; but he did nothing more. It is between Taylor and Symington that the matter rests, and we think a full inquiry into the matter will show that the invention owed little to the former.

Documents have recently been discovered which substantiate very fully the claims of Symington. These documents are in the handwriting of John Taylor, the brother of James, the claimant whose rights to the honour we have already noticed, and whose name is not so much as once mentioned relative to the matter. A pension of £50 has, we believe, been granted to the widow of Taylor for his supposed services as introducer of steam-navigation; nothing was given to Symington during his life, and nothing yet to the relatives he has left behind him. We trust that little time will elapse ere the nation has, through the voice of its legislature, showed a nation's gratitude to the memory of the real introducer of steam-navigation—William Symington.

To afford a ready means to judge of the respective claims of the parties interested, the following summary is appended:—

In 1786, Mr. Symington exhibited a working model of a steam-carriage in Edinburgh, and suggested steam-navigation.

In 1788, he superintended the construction of a steam-engine of his own invention, and the fitting of it into one of Mr. Miller's pleasure-boats; which boat was successfully propelled that year on Dalswinton Lake by the power of steam.

In 1789, a larger boat, with a more powerful engine of the same kind, was successfully propelled by steam on the Forth and Clyde Canal.

In 1800, he was engaged by Lord Dundas to construct steam-tugs for the Forth and Clyde Canal.

In 1801, the "Charlotte Dundas," steam-tug, was repeatedly tried on the canal, towed vessels there and up the rivers Forth and Carron, into Grangemouth, and carried Mr. Fulton, the American engineer, eight miles on the canal in an hour and twenty minutes. In the same year he patented his direct-acting steam-engine for propelling vessels.

In 1802 and 1803, the second "Charlotte Dundas," a larger and more powerful boat, towed vessels on the canal; and on one particular occasion dragged two laden sloops of seventy tons burden each, the "Active" and "Euphemia," a distance of 19½ miles in six hours, against a strong adverse gale.

His experiments were here ended, through the fear of the managers of

the canal that its banks might be injured by the undulation caused by the wheels.

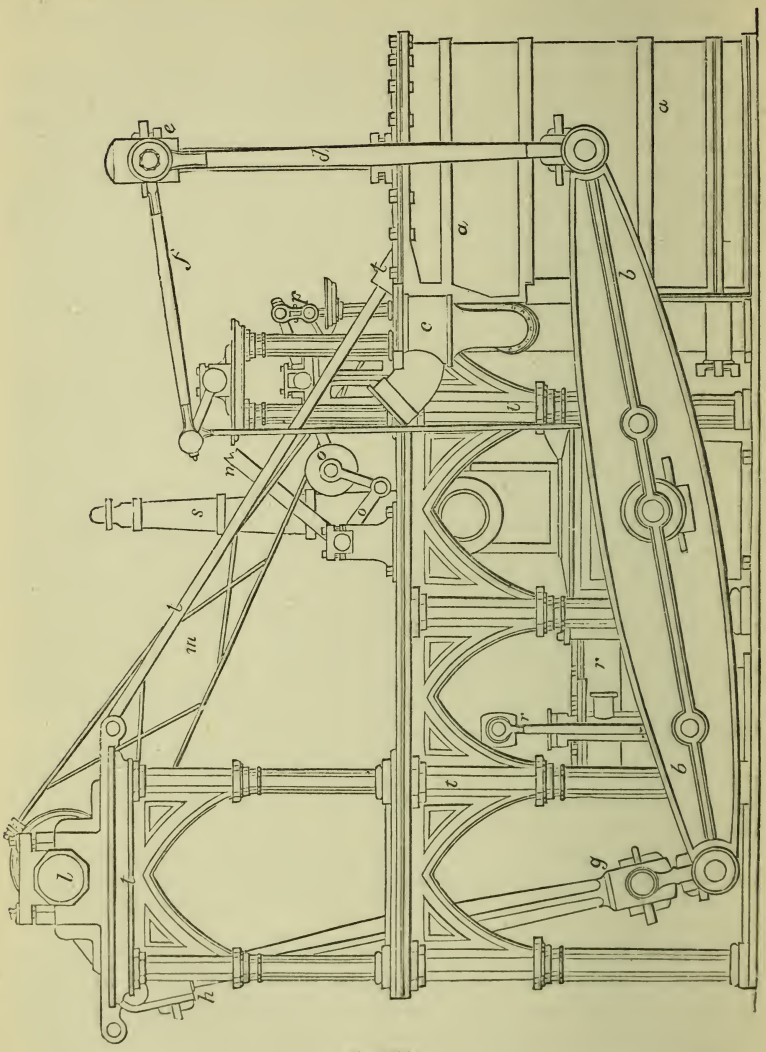

fig. 122.

In 1807, Mr. Fulton first succeeded in propelling a vessel by steam on the Hudson.

In 1811, Mr. Bell's first boat, the "Comet," was tried, and set to work on the Clyde. Mr. Bell, as well as Mr. Fulton, had been on board of Mr. Symington's boats, and satisfied himself of their efficiency.

Having thus taken a rapid glance at the main points of interest in con-

nection with the history of steam-boat navigation, we proceed to illustrate the various kinds of modern marine engines. These are of two kinds—engines as applicable to the driving of paddle-wheel steamers, and those applicable to "screw" steamers.

The engines adapted for paddle-wheel steamers are of two kinds, "side-lever" and "direct-action." The arrangements of the ordinary side-lever engine will be understood from an inspection of the drawing in fig. 122. As will be observed, this is a modification of the land beam-engine; but as the space overhead in all steam-boats is necessarily limited, the beams are arranged at the lower part of the engine. The cylinder is at *a a*, *b b* the working beam, *c* the steam-pipe, *d d* the side-rod connecting the end of the beam with the cross-head of the piston-rod *e*, *f* the parallel motion; *g* the connecting-rod connecting end of beam with crank *h*, *l* paddle-shaft, *m* eccentric rod, *n o p* starting handle and valve gearing; *r r* condenser air-pump, worked by the side-lever connected with beam and cross-head of air-pump piston-rod, *s s* air-vessel, *t t* framing.

In fig. 123 we give a diagram illustrative of the connection of cylinder, condenser, and air-pump: *a* is the cylinder, *b* the piston-rod, *c* the lower, *d* the upper steam port, *e* the passage leading to the condenser *f*: a division is placed between the condenser and the eduction passage *e*, to prevent the injection-water passing to the lower part *c* of the cylinder: *g* the air-pump, *h i* the air-vessel. We now give descriptions of a few of the details of the engine worth notice. In the air-pump a valve is provided at the bottom plate opening upwards; this is to allow the water to pass from the condenser to the air-pump, but to prevent its return. Another valve is placed at the entrance to the hot-well *h* (fig. 123); this retaining the

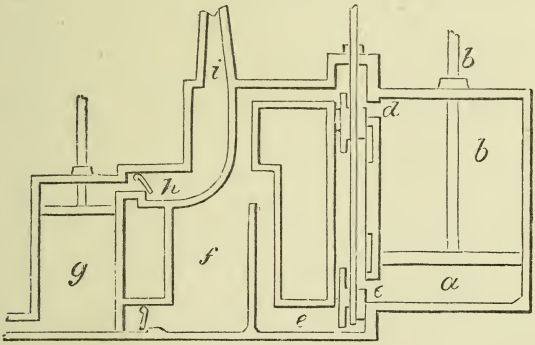

fig. 123.

water in the cone, frees the air-pump bucket from an unnecessary weight of water. The air-cone is now frequently dispensed with. Two orifices are made in the hot-well *h*, fig. 123, one larger than the other; the small one communicates with the force-pump for supplying the boiler, the other with the sea, and is termed the waste-pipe.

Escape-valves are provided to the steam cylinder; the office of these is to allow a passage to the water which collects above and below the piston.

The escape-valve at the bottom of cylinder is weighted with a pressure above that of the steam in the boiler; if this precaution were not taken, the steam *a* would blow through them on being admitted to the cylinder. The upper escape-valve is generally placed in the cylinder cover, and is retained by a spring in some instances. In some engines the escape-valves are applied to the ports of the cylinder and kept closed with springs.

The diagram in fig. 124 illustrates the method adopted in side-lever engines in working the side-valves; *f* is the end of the cross head of the



fig. 124.



fig. 125.

valve-rod, *e e* side-lever, connected with the end *d* of the rocking-shaft *a* oscillating on the centre *b*, and which is moved alternately up and down by the eccentric lever *c*, to which the eccentric rod is attached: *g* is the back balance-weight; the office of this weight is to balance the side-valve in such a position that both of the steam-ports are closed when the engine is at rest. In starting the engine the rocking-shaft is moved by hand through the agency of a lever attached to it. In place of a lever, many engines have wheels placed vertically, like the steering wheels of ships. The best starting gear is that known as Stephenson's link-motion, used in locomotives, and which, in Chapter V., we have illustrated and described. This also forms the best reversing gear, as by it the full speed a-head can be instantly changed for full speed a-stern without stopping the engines. In engines where this contrivance is not used, the eccentric has to be thrown out of gear before the engine can be reversed. On the crank-shaft, on which the eccentric is placed, a snug or projection is made, as at *b*, fig. 125; two snugs are also fitted, as at *c d*. Suppose the shaft revolves so as to bring the face *f* of the snug *b* against the snug *c*, the eccentric moves in the direction of the arrow; but if it is desired to change the motion, the shaft *a* revolves in the contrary direction, and the face *e* of the snug *b* comes in contact with the snug *d*.

The comparatively large space occupied by side-lever engines, has directed the attention of many of our engineers to devise arrangements by which space would be economised. This has been attempted, and in some instances with considerable success, by the introduction of the direct-action engine. The varieties of this class are very numerous. To the reader anxious to have a knowledge of these, we must refer to larger works; the *Artisan* treatise gives many illustrations under this head. Our space permits us only to give some simple diagrams illustrative of the most noted of

these. The distinguishing feature in this form of engine is the absence of the side beams, rotatory motion being given at once to the paddle-shaft from the piston-rod. In fig. 126 we give a diagram illustrative of the



fig. 126



fig. 127.

"steeple-engine," much used in the Clyde: *a* is the piston-rod, carrying a triangular cross-head *b b*; *c* the paddle-shaft, *d* the connecting-rod, attached at one end to the upper extremity of the cross-head *b b*; and the parallelism of the piston-rod is maintained by the guide *e*, in which the cross-head *m* works.

In fig. 127 we illustrate the arrangement of the Siamese or double-



fig. 128.



fig. 129.

cylinder engine introduced by Maudsley and Son. *a b* the two cylinders, *e e* the piston-rods connected with the cross-head *e e*, which is continued downwards to *d*, and which slides between the two parallel guides *e*; one end of the connecting-rod is attached to *e*, and the other to the crank *g*, on pedestal *f*. In fig. 128 we give a diagram illustrative of another form of direct-acting engine, which is considered as exceedingly compact; "indeed," says an authority, "no engine can occupy less room than this: for its length is little more than the diameter of the cylinder." Let *a* represent the piston-rod, *b* the connecting-rod, *c c* the paddle-shaft, *d* the air-pump rod worked by an eccentric on the shaft *c c*. The cylinder-valve is worked by the eccentric-rod *f*, fig. 129, from an eccentric on shaft *c c*, fig. 128; the

rod *f* works the levers *a* and valve-rod *g*; *h* the pedestal fixed to the pillar *e*; *m* is the eccentric-rod working the air-pump *n* corresponding to *d*, fig. 128. In direct-action engines, where the connecting-rod is between the piston and the crank, the engine is designated as belonging to the class known as the "Gorgon engine," introduced by Messrs. Seaward, where the connecting-rod is above the crank *a*; they come under the designation of steeple-engines.

A well known form of direct-action engine is that known as the "oscillating." We have already described the action of this; we now give a diagram showing its application to a paddle-wheel steamer (fig. 130).

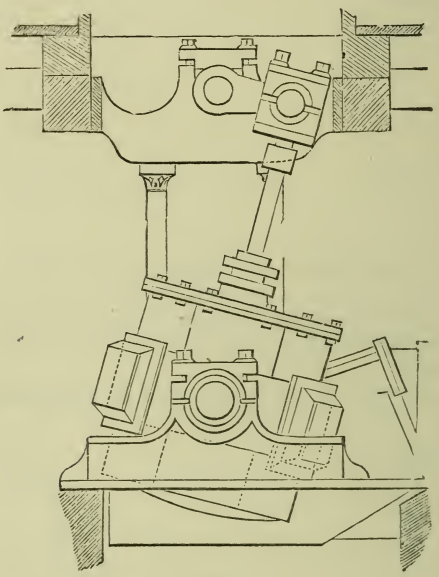

fig. 130.

Where vessels are propelled by the "screw," engines differing in arrangement from those we have already described are adopted. The screw having to make so many more revolutions than paddles in the same space of time, the speed of the screw-shaft is sometimes brought up by cog-wheels. In the engines of the "Great Britain" this arrangement is adopted; a pair of oscillating engines giving motion to a horizontal shaft; in this is fixed the driving wheel, taking into the toothed wheel on the screw-shaft. The inconveniences attendant on this form have, however, prompted in other instances the use of engines connected directly to the screw-shaft; the difficulty in this case, however, is, that the valves of the air-pump are liable to be knocked speedily to pieces from the high speed at which the engine works. Mr. Bourne proposes to obviate this by replacing the air-pump valves by a species of ordinary slide valve.

In fig. 131 we give a drawing of a double-geared engine, adapted for

screw propulsion by Messrs. Scott and Co. of Greenock. The drawing shows a transverse section of the ship, showing the engines in complete external front elevation. The cylinders are fifty-two inches diameter,

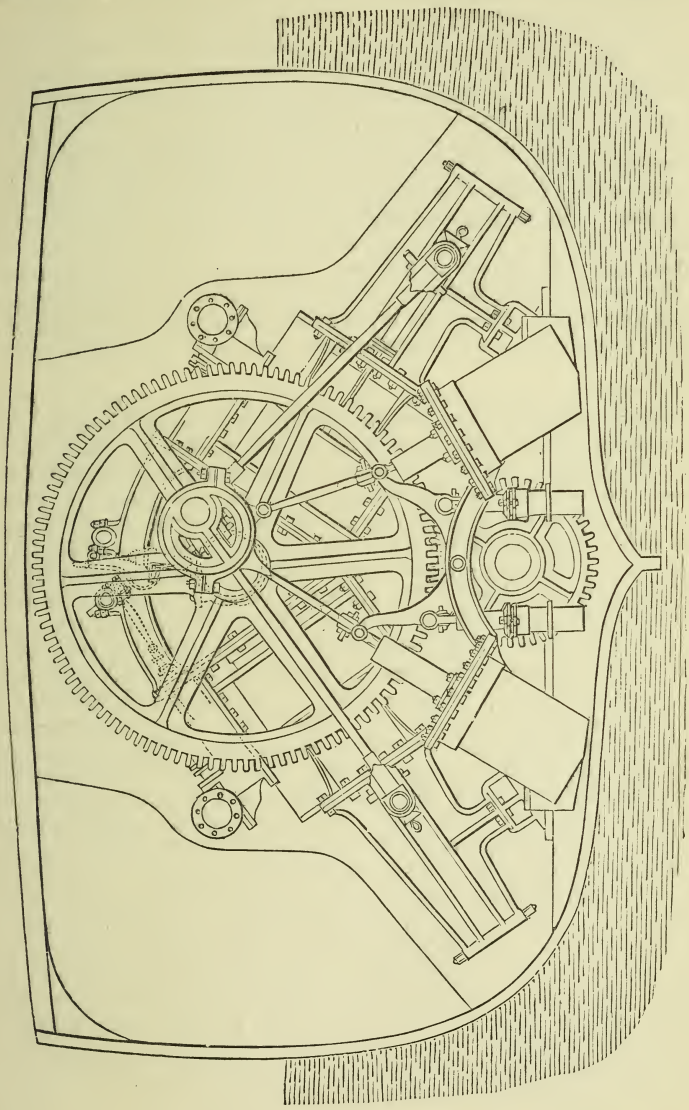

fig. 131.

and three feet nine inches stroke, placed diagonally athwart the ship, and at right angles to each other; whilst the piston-rods project through the lower covers, to allow of long return connecting-rods. Each cylinder has

two piston-rods, for greater steadiness, their outer ends in each case being keyed into a cross-head fitted at each end with slide-blocks, for working in a pair of inclined open guide-frames bolted to the bottom cylinder-cover, and supported beneath by projecting bracket-pieces, recessed and bolted down upon pedestal pieces on the engine sole-plate. From each end of this cross-head, immediately outside the guide-frame, a plain straight connecting-rod of round section passes up, to actuate the main first-motion shaft. The upper ends of these connecting-rods are jointed to side-studs, or crank-pins, fast in two opposite arms of a pair of large spur-wheels, which give motion to the screw-shaft by means of a pair of corresponding spur-pinions, fast on the shaft beneath a single pin in each wheel answering for the two opposite connecting-rods on the same side of the engine. The main spur-wheels are eleven feet five and a half inches diameter, with one hundred and eight teeth of four-inch pitch, and fourteen inches in breadth on the face. They are keyed on the extremities of a common shaft, which is conveniently placed in the angular space formed by the two ends of the inverted steam-cylinders, being carried in a pair of pedestals cast with angular bracket-pieces to bolt down upon the cylinders.

The wheels are equally compactly placed, one on each side the cylinders and the general mass of machinery, and just filling up the space inside the connecting-rods. The pinions on the screw-shaft are four feet six inches diameter, so that the ratio between the screw and the engine's rate is two and a half to one. By this arrangement each piston is directly coupled to both of the large wheels, and the increased length of the cross-heads which the plan involves is counterbalanced by the effect of the double piston-rods; for by this division of the pressure the cross-strain leverage is proportionately diminished. The system of duplex gearing also insures a good, substantial, and well-balanced connection of the first motions shaft with the screw-shaft. The air-pumps are both situated on one side of the engines, and are worked from the connecting-rod stud of the spur-wheel on that side, the pump cylinders being bolted at their lower ends by their foot-branches to the sole-plate, whilst their upper ends are connected together by a couple of arched cross-pieces. They are thus well bolted together, and to the main framing, their intermediate connecting brackets answering to carry their stud centres of a pair of bent levers for working the bilge and feed-pumps. The whole of the pumps are constructed on the trunk principle, of which class Mr. Humphries' engines, of the "Dartford," are so well known as the earliest type. As the throw of the main driving-studs would be too great for the purposes of the air-pumps, it is very ingeniously reduced by means of an eccentric set upon the stud, so as to bring the real working centre nearer to the centre line of the first motion-shaft. One of the connecting-rods for working the pump is formed in one piece, with the eccentric ring, and the other is jointed to the ring on the opposite side; both rods descending to joint eyes on the upper ends of links which are again connected by bottom joints, in the recesses of the plunger-trunks of the pumps. The same intermediate joints of the lower ends of the connecting-rods also afford the means of connection with the upper ends of the bent levers of the bilge and feed-pumps, which levers serve the purpose of radius-bars for the air-pump-rods. The links for working the plunger-

trunks of the bilge and feed pumps are jointed nearly at the middle of the bent levers so as to give the required short stroke, the pumps themselves being set vertically, one on each side the screw-shaft on the sole-plate. The cylinder-valves are combinations of the four-ported class, so successfully introduced on the Clyde by Mr. Thomas Wingate, and the equilibrium valve. With this arrangement, the engines are handled with very great facility, and a very free exhaust is obtained. They are actuated by a pair of eccentrics on the main first-motion shaft, rods from which pass upwards to short levers on a pair of parallel rocking-shafts, working in end-bearings overhead. These bearings are carried upon a pair of parallel arched frame-pieces, stretching across between the two valve-chests, so that they thus bind the upper ends of the cylinders. The rocking-shafts are cranked at their centres, and have short connecting-rods jointed on to the crank-pins, and extending right and left to their respective valve-spindles. The steam enters the valve-chests on each side, through the elbow-branches, opening into stop or expansion valve-chests at the lower corners of the valve-casings, and the exhaust steam passes off to the condenser by passages round both sides of the cylinders. The condenser is entirely within the engine, beneath the cylinders; it answers, indeed, as the supporting pedestal for the cylinders, which are bolted down upon it.

Of engines adapted to drive the screw-propeller direct, without the intervention of gearing, recently introduced, the "trunk-engine," by Messrs. Penn, of Greenwich, is most remarkable; it is coming fast into general use. In this form of engine, the direct connection between the piston and crank, obtainable by the oscillating engine, is obtained without the inconveniences arising from the vibration of the cylinder. To the piston a hollow trunk, or tube, is attached; this passes through the cylinder-cover; between them a packing is interposed, to prevent any leakage between the trunk and the cover; the trunk is of such length as to project beyond the cylinder-cover when the piston is at the bottom of the cylinder. The trunk is of considerable dimensions; the connecting-rod is connected by a movable joint to the piston, and its other end to the crank-pin; as the piston moves backwards and forwards, the connecting-rod vibrates within the trunk, and thus the direct action is obtained by very simple means. The trunk is on both sides of the piston, or, in other words, the piston is placed midway in the trunk, the connecting-rod being connected with that side of the piston nearest the crank. In this class of engines, the cylinders are horizontal and placed side by side; the air-pumps are also horizontal; the great aim being to have all the machinery as low as possible beneath the water-line, a most important point in vessels of war. Both ends of the trunk pass through stuffing-boxes in the cylinder-cover; by this arrangement, the pressure of the steam-side is prevented from preponderating over the other. In fig. 132 we give a diagram illustrative of the arrangement of the trunk-engine. Let *a a* be the piston, *b b* the trunk on the crank side, *c c* that on the opposite side; *d e* the connecting-rod, joined at one end *d* to the piston, and at the other *e* to the crank on the "propeller" shaft; *f* and *g* show the vibration of the connecting-rod in various points of the revolution of the crank. By this arrangement of piston and crank, it will be observed that the steam does not press on the whole surface of the piston,

but only in the annular ring *a a*, between the outside of the trunk *b* (fig. 133), and the interior of the cylinder in which the piston moves.

Governors are usually applied to screw-engines in vessels of light draught, in order to regulate the speed. They are of the usual construction, although many new schemes have been recently introduced; for

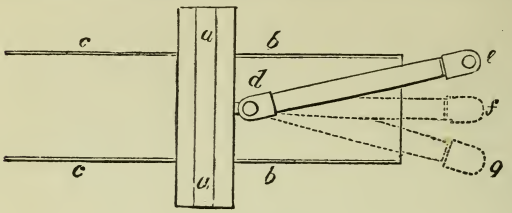

fig. 132.



fig. 133.

notices of these we refer the reader to the pages of the *Artisan*, more particularly the numbers for 1853. The necessity for a regulator of the speed of the screw-engine will be obvious, in considering that as the screw is placed at the extremity of the vessel, as it pitches in a heavy sea, the screw would revolve in the air; and as the load would thus be taken from the engine, it would revolve at too great a speed.

J. OGDEN AND CO., PRINTERS, 172, ST. JOHN STREET, E.C.

BOOKS FOR BOYS AND CHILDREN.

Sunday Book for Children. Price 5s.

Half-hours with the Bible; or, Scripture Scenes and Characters;

Described in a simple and attractive form, suitable for Young People; beautifully and profusely illustrated with Engravings, post 8vo, cloth gilt.

"A first-rate Bible History for Children, duly divided, and carefully epitomised. Commencing with a short narrative of the Creation, the book carries the reader through the history of the Patriarchs, and describes the career of Moses and the wanderings of the children of Israel. The Story of the Judges, Kings, and Prophets in Israel follows next, and the history of the life of Our Saviour and the career of the Apostles conclude this admirable 'Children's Bible Book.' The Illustrations exceed 150 in number, and are in a high style of art; and the book altogether bears conclusive evidence of the care bestowed upon every department in its production."

THE BEST BOOK ON GAMES.

Now ready, post 8vo, 348 pages, extra cloth, gilt edges, price 5s.,

The Boy's Handy Book of Games, Sports, Pastimes, and Amusements;

Being a Complete Encyclopædia of Boyish Recreative Pursuits of every description, and forming a Guide to the employment of every Leisure Hour. The whole divided into Separate Treatises, and illustrated with Hundreds of Engravings.

Demy 8vo, Coloured Illustrations, 5s.; gilt edges, 6s.

BEETON'S BOY'S OWN LIBRARY.

1. Stories of the Wars.
2. How I Won my Spurs. Edgar.
3. Cressy and Poictiers. Ditto.
4. Runnymede and Lincoln Fair. Ditto.
5. Wild Sports of the World.
6. Curiosities of Savage Life.
7. Hubert Ellis.
8. Don Quixote. 300 Illustrations.
9. Gulliver's Travels.
10. Robinson Crusoe.
11. Silas the Conjuror.
12. Savage Habits and Customs.
13. Reuben Davidger.
14. Our Soldiers and the Victoria Cross.
15. Zoological Recreations. By W. I. Broderip, F.R.S.
16. Wild Animals in Freedom and Captivity.
17. The Man among the Monkeys; or, Ninety Days in Apeland.

*** The best set of Volumes for Prizes, Rewards, or Gifts to English Lads. They have all been prepared by Mr. Beeton with a view to their fitness in manly tone and handsome appearance for Presents for Youth.

An Established Favourite Gift Book for Boys.

Extra cloth gilt and gilt edges, price 5s.

THE BOY'S OWN SEA STORIES;

Being the Adventures of a Sailor in the Navy, the Merchant Service, and on a Whaling Cruise. Narrated by himself. Thick post 8vo, numerous illustrations.

Extra cloth, full gilt side, back, and edges. Now ready, price 5s.

THE BOY'S HANDY BOOK OF NATURAL HISTORY.

Edited by H. W. Dulcken, Ph.D. With numerous Illustrations by William Harvey and others, and 16 Coloured Illustrations. Post 8vo.

Uniform with "Household Management," half-bound, 7s. 6d.; half-calf, 10s. 6d.

BEETON'S BOOK OF HOME PETS. Showing how to Rear and Manage in Sickness and in Health—Birds, Poultry, Pigeons, Rabbits, Guinea-Pigs, Dogs, Cats, Squirrels, Tortoises, Fancy Mice, Bees, Silkworms, Ponies, Donkeys, Goats, Inhabitants of the Aquarium, &c. &c. Illustrated by upwards of 200 Engravings, and 11 beautifully Coloured Plates by HARRISON WEIR and F. KEYL.

Just Ready, cloth gilt and gilt edges, price 5*s.*

HOUSEHOLD AMUSEMENTS AND ENJOYMENTS. Comprising Acting-Charades, Burlesques, Conundrums, Enigmas, Rebuses, and a number of New Puzzles in endless variety. With folding Coloured Frontispiece.

Uniform with "Beeton's Book of Birds," cloth elegant, gilt edges, price 3*s.* 6*d.*

BEETON'S BOOK OF POULTRY AND DOMESTIC ANIMALS. Showing How to Rear and Manage in Sickness and in Health—Pigeons, Poultry, Ducks, Turkeys, Geese, Rabbits, Dogs, Cats, Squirrels, Fancy Mice, Tortoises, Bees, Silkworms, Ponies, Donkeys, Inhabitants of the Aquarium, &c. &c.

*** This Volume contains upwards of One Hundred Engravings, and Five Coloured Plates from Water-Colour Drawings by HARRISON WEIR.

BOOK OF BIRDS. Showing How to Rear and Manage in Sickness and in Health. Cloth elegant, gilt edges, 3*s.* 6*d.* With Engravings and Coloured Plates after HARRISON WEIR.

Just published, New and Revised Edition, crown 8vo, cloth, price 7s. 6d.

A MILLION OF FACTS of Correct Data and Elementary Information in the Entire Circle of the Sciences, and on all Subjects of Speculation and Practice. Much Enlarged, and Carefully Revised and Improved, and brought down to the Present Year. A large amount of new matter added.

*** With an Elabarate Index to the Volume.

Just Published, price 7s. 6d., half-bound.

TREASURY OF NATURAL SCIENCE. From the German of Professor SCHOEDLER, with numerous additions by HENRY MEDLOCK, F.C.S Fourth Edition, with Copious Index, and upwards of 500 Engravings.

One Thousand Illustrations, price 10*s.* 6*d.*, half-bound.

THE SELF-AID CYCLOPÆDIA FOR SELF-TAUGHT STUDENTS. Comprising General Drawing; Architectural, Mechanical, and Engineering Drawing; Ornamental Drawing and Design; Mechanics and Mechanism; the Steam-Engine. By ROBERT SCOTT BURN, F.S.A.E., &c., Author of "Lessons of My Farm," &c. 690 pages, demy 8vo.

BEETON'S
NATIONAL REFERENCE BOOKS
For the People of Great Britain and Ireland.

In an age of great competition and little leisure the value of Time is tolerably well understood. Men, wanting facts, like to get at them with as little expenditure as possible of money or minutes. BEETON'S NATIONAL REFERENCE BOOKS have been conceived and carried out in the belief that a set of Cheap and Handy Volumes in Biography, Geography, History (Sacred and Profane), Science, and Business, would be thoroughly welcome, because they would quickly answer many a question. In every case the type will be found clear and plain.

THE CHEAPEST AND BEST REFERENCE BOOKS IN THE WORLD.

Each containing from Five Hundred and Twelve to Five Hundred and Sixty Columns.

Price One Shilling, Wrapper; Cloth, 1s. 6d.; Half Red Roan, 2s.

1. **BEETON'S BRITISH GAZETTEER.** A Topographical and Historical Guide to the United Kingdom. Compiled from the Latest and best Authorities. It gives the most recent Improvements in Cities and Towns, states all the Railway Stations in the three Kingdoms, and nearest Post Towns and Money Order Offices, and the latest Official Populations.
2. **BEETON'S BRITISH BIOGRAPHY.** From the Earliest Times to the Accession of George III.
3. **BEETON'S MODERN MEN AND WOMEN.** From the Accession of George III. to the present time.
4. **BEETON'S BIBLE DICTIONARY.** A Cyclopædia of the Truths and Narratives of the Holy Scriptures.
5. **BEETON'S CLASSICAL DICTIONARY.** A Treasury of Greek and Roman Biography, Geography, Mythology, and Antiquities.
6. **BEETON'S MEDICAL DICTIONARY.** A Safe Guide for every Family, defining with perfect plainness the symptoms and treatment of all ailments, illnesses, and diseases.
7. **BEETON'S DATE BOOK.** A British Chronology from the earliest records to the present period.
8. **BEETON'S DICTIONARY of COMMERCE.** A Book of Reference. Containing: an Account of the National Productions and Manufactures dealt with in the Commercial world, Explanations of the modes of transacting business, with the principal Terms used in Commerce at Home and abroad, and a description of the principal Ports and Markets of both hemispheres
9. **BEETON'S MODERN EUROPEAN CELEBRITIES.** A Biography of Continental Men and Women of Note who have lived during the last Hundred Years, or are now living, uniform with, and a Companion Volume to, "Beeton's British Biography," and "Beeton's Modern Men and Women."

Cloth Boards, price One Shilling.

BEETON'S READY RECKONER.—A Business and Family Arithmetic. With all kinds of new tables, and a variety of carefully digested information, never before collected. 240 pages.

Cloth, cut flush, price One Shilling.

BEETON'S GUIDE BOOK TO THE STOCK EXCHANGE AND MONEY MARKET. With hints to Investors and the Chances of Speculators.

INVESTING MONEY with SAFETY and PROFIT.

BEETON'S SIXPENNY READY RECKONER. 96pp.

London: Ward, Lock, & Tyler, Warwick House, Paternoster Row, E.C.

The GREAT FAMILY MEDICINE of the AGE.

NOTICE.—On and after the 1st of January, 1873, **ALL BOXES** issued by the Proprietors will have the Government Stamp pasted over each box, instead of being on the outside wrappers as heretofore; and on each respective box and on the outside wrappers there will be printed the name and the **TRADE MARK** of the Firm.

WHELPTON'S
VEGETABLE PURIFYING PILLS

Are warranted not to contain a single particle of MERCURY or any other MINERAL SUBSTANCE, but to consist entirely of Medicinal Matters, PURELY VEGETABLE.

They have been used by the Public for nearly Forty Years,

and have proved their value in thousands of instances in diseases of the HEAD, CHEST, BOWELS, LIVER, and KIDNEYS; also in ULCERS, SORES, and RHEUMATISM; and in all SKIN COMPLAINTS are one of the

BEST MEDICINES KNOWN.

ALSO,

WHELPTON'S VEGETABLE STOMACH PILLS

Are particularly suited to Weakly Persons, being exceedingly mild and gradual in their operation, imparting tone and vigour to the Digestive Organs.

Prepared and sold wholesale and retail in boxes, price 7½d., 1s. 1½d., and 2s. 9d., by G. WHELPTON & SON, 3, Crane Court, Fleet Street, London; sent free to any part of the United Kingdom on receipt of 8, 14, or 33 stamps.

Sold by all Chemists and Medicine Vendors at Home and Abroad.

UNIVERSITY OF ILLINOIS-URBANA
3 0112 069442769